

**TNO report****TNO 2013 R11891****Investigations and real world emission  
performance of Euro 6 light-duty vehicles****Mobility**Van Mourik Broekmanweg 6  
2628 XE Delft  
P.O. Box 49  
2600 AA Delft  
The Netherlands[www.tno.nl](http://www.tno.nl)

T +31 88 866 30 00

F +31 88 866 30 10

[infodesk@tno.nl](mailto:infodesk@tno.nl)

|                         |  |
|-------------------------|--|
| Date                    | 5 December 2013  |
| Author(s)               | Norbert Ligterink<br>Gerrit Kadijk<br>Pim van Mensch<br>Stefan Hausberger (TUG)<br>Martin Rexeis (TUG) |
| No. of copies           | 0100003108   |
| Number of pages         | 53 (incl. appendices)  |
| Number of<br>appendices | 2  |
| Sponsor                 | Dutch Ministry of Infrastructure and the Environment   |
| Project name            | IenM LD steekproef 2013-2015   |
| Project number          | 057.02764  |

All rights reserved.

No part of this publication may be reproduced and/or published by print, photoprint, microfilm or any other means without the previous written consent of TNO.

In case this report was drafted on instructions, the rights and obligations of contracting parties are subject to either the General Terms and Conditions for commissions to TNO, or the relevant agreement concluded between the contracting parties. Submitting the report for inspection to parties who have a direct interest is permitted.

© 2013 TNO

## Samenvatting

Uit onderzoek uitgevoerd in opdracht van het Ministerie van Infrastructuur en Milieu blijkt dat de NO<sub>x</sub>-emissie van een aantal geteste Euro 6 dieselpersonenauto's onder praktijkomstandigheden hoger ligt dan op grond van de Euro 6 norm mocht worden verwacht. De Euro 6 norm wordt in 2014 van kracht en beoogt een substantiële verlaging van de schadelijk uitstoot van personenauto's en bestelwagens. Ondanks het aanscherpen van de NO<sub>x</sub>-norm van Euro 5 (180 mg/km) naar Euro 6 (80 mg/km) ligt de praktijk NO<sub>x</sub>-emissie van de geteste voertuigen op circa 500 mg/km, d.w.z. hetzelfde niveau als van Euro 4 en Euro 5 dieselpersonenauto's.

In opdracht van het ministerie van Infrastructuur & Milieu heeft TNO onderzoek gedaan naar het praktijkemissiegedrag van Euro 6 personenwagens die zijn uitgerust met dieselmotor. Het onderzoek is een basis voor de emissiefactoren die in 2014 worden vastgesteld. Ook heeft het ministerie aan TNO gevraagd adviezen op te stellen voor maatregelen die resulteren in lage praktijkemissies en in lijn zijn met de emissies in de typegoedkeuringstest.

Bij de uitgevoerde testen gaat het zowel om metingen in het laboratorium op de rollenbank als om metingen met mobiele meetapparatuur (PEMS) op de weg. De geteste voertuigen voldoen op basis van de NEDC typekeuringstest aan de Euro 6 NO<sub>x</sub>-norm van 80 mg/km. Echter onder praktijkomstandigheden ligt de NO<sub>x</sub>-uitstoot tot wel een factor 6 hoger. Eén getest voertuig presteerde wel goed en haalde onder praktijkomstandigheden 35-95% van de NO<sub>x</sub> limietwaarde.

### **Leeswijzer:**

Dit onderzoek is gebaseerd op diverse emissiemetingen aan Euro 6 diesel personenwagens. De metingen zijn in 2010 en 2013 uitgevoerd, zowel in een laboratorium als op de weg.

Vervolgens zijn de meetresultaten beoordeeld aan de hand van de toegepaste nabehandelingstechnologie. Tevens zijn de emissiefactoren bepaald en vergeleken met emissiefactoren van oudere voertuigen.

Ook zijn de resultaten van dit onderzoek vergeleken met resultaten van een aantal andere Europese instituten.

Als laatste zijn op basis van deze resultaten aanbevelingen gedaan voor de regulering van praktijkemissies in de toekomstige emissiewetgeving.

### **Reden tot zorg:**

Ondanks een voortdurende aanscherping van de NO<sub>x</sub> emissienormen van Euro 1 naar Euro 6, zijn de NO<sub>x</sub> emissiefactoren<sup>1</sup> van dieselpersonenauto's op de snelweg de laatste 10 jaar ongeveer gelijk gebleven (400 – 600 mg/km). In stadsverkeer is er wel sprake van reductie (van 1000 naar 200 mg/km) maar de NO<sub>x</sub> emissie ligt nog altijd ver boven de limietwaarde van de typegoedkeuring (80 mg/km). Zie ook Figuur 1.

In 2010 zijn enkele metingen uitgevoerd aan de eerste Euro 6 dieselpersonenauto's. Deze eerder geteste voertuigen uit 'voorserie modellen' (pre-

---

<sup>1</sup> Een emissiefactor is een op basis van meetdata berekend gemiddelde voor de vloot

Euro 6), die ook leverbaar zijn op de Amerikaanse markt, presteerden beter dan de huidige Euro 6 productiemodellen.

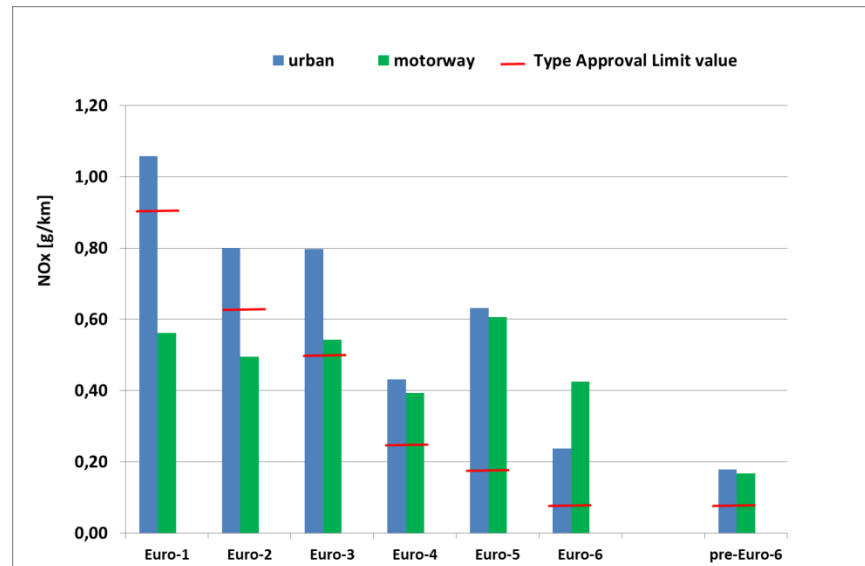


Figure 1: NOx emissiefactoren voor stad en snelweg en limietwaarden bij typegoedkeuring van dieselpersonenwagens

Tot op heden is in Nederland een gering aantal Euro 6 dieselauto's verkocht. Het betreft vooral duurdere voertuigen. Voor kleinere voertuigen wordt namelijk nog geen Euro 6 technologie geleverd. Vanaf 1 september 2014 zullen echter alle nieuwe typen personenwagens en kleine bedrijfswagens moeten voldoen aan Euro 6 emissienormen. Eén jaar later zullen alle voertuigen waarvoor een kenteken wordt aangevraagd aan deze emissienorm moeten voldoen. Vermoedelijk zullen de kleinere Euro 6 dieselvoertuigen, die op dit moment nog niet leverbaar zijn, met goedkopere technologie worden uitgerust. Dit kan leiden tot andere (hogere!) praktijkemissies en bijstelling van de emissiefactoren.

Uit de metingen blijkt dat Euro 5 en Euro 6 voertuigen met benzinemotor in de praktijk wel lage NOx emissies hebben.

***Toegepaste nabehandelingstechnologie is van grote invloed:***

De NO<sub>x</sub> praktijkemissies van Euro 6 dieselvoertuigen variëren zeer sterk. Afhankelijk van de testcondities en het voertuig is de spreiding 10% tot 1000% van de limietwaarde. Dit wordt hoofdzakelijk veroorzaakt door het type, de werking en regelstrategie van de uitlaatgasnabehandelingstechnologie. Beschikbare technologieën zijn EGR (uitlaatgasrecirculatie), SCR (selectieve katalytische reductie) en LNT (Lean NOx Trap). Net als bij Euro 5 dieselvoertuigen wordt bij Euro 6 voertuigen selectief gebruik gemaakt van deze systemen die zorg dragen voor verlaging van NOx-emissies in de uitlaatgassen. De regelstrategie is zodanig dat EGR en SCR systemen tijdens de rijomstandigheden die optreden bij de typekeuringstest functioneel zijn, maar onder praktijkomstandigheden om economische redenen (gedeeltelijk) worden uitgeschakeld.

Bij de geteste voertuigen ging het om duurdere middenklasse of grotere auto's die met EGR en SCR dan wel met LNT waren uitgerust. Goedkopere Euro-6 dieselpersonenauto's uit de compacte klasse of kleiner zijn nog niet of nauwelijks op de markt. Het is waarschijnlijk dat de kleinere en goedkope alsook de middelgrote dieselvoertuigen die in Nederland het hoofdaandeel in het dieselsegment vormen, zullen worden uitgerust met de goedkoopste Euro 6 technologie. Fabrikanten passen dan alleen EGR toe om auto's op de typekeuringstest aan Euro-6 te laten voldoen. Beschikbare systemen als SCR en LNT die onder praktijkomstandigheden een forse NO<sub>x</sub>-reductie kunnen leveren zullen bij deze modellen naar verwachting niet worden toegepast. Net als Euro 5 voertuigen levert dit vooral een risico van hoge NO<sub>x</sub> praktijkemissies op de snelweg. Verwacht wordt dat de praktijk NO<sub>x</sub>-emissies van deze kleinere Euro 6 dieselpersonenauto's ook op het niveau van Euro 5 uit zullen gaan komen.

#### ***Resultaten emissiemetingen dieselvoertuigen TNO en TUG:***

Alle Euro 6 dieselvoertuigen blijken in de typegoedkeuringstest aan de limietwaarde van 80 mg/km te voldoen, maar de doorwerking daarvan in de praktijk blijkt beperkt. Dit komt vooral tot uiting in meer praktijkgerichte metingen. Op de rollenbank is dit de CADC-test en op de weg in testen in het stadsverkeer, op de buitenweg en op de snelweg. Ook hier valt de NO<sub>x</sub> praktijkemissie het meest op, die is gemiddeld 400-500 mg/km (5-6 keer limietwaarde). In de testen op de openbare weg (stad, buitenweg, snelweg) zijn gemiddelde NO<sub>x</sub> emissies van 550 – 800 mg/km gemeten, dit is 7 – 10 keer de limietwaarde van de typegoedkeuringstest. Verder valt op dat de spreiding onder de verschillende voertuigen zeer groot is (wel tot een factor 10). Slechts één dieselvoertuig met EGR in combinatie met LNT technologie presteerde naar verwachting.

Voor de emissiecomponenten CO, THC en PM is er voor alle technologieën geen sprake van praktijkemissies die hoger zijn dan de emissies in de typekeuring. De resultaten van dit onderzoek worden bevestigd door externe bronnen en metingen van de Technische Universiteit in Graz. Alhoewel het aantal gemeten voertuigen beperkt is, is het niet de verwachting dat het beeld zal veranderen als er meer testresultaten beschikbaar komen. Een en ander betekent dat de NO<sub>x</sub> praktijkemissies van Euro 3,4,5 en 6 voertuigen niet wezenlijk verschillen.

#### ***Resultaten literatuuronderzoek:***

Vier Europese bronnen met emissieresultaten van Euro 6 voertuigen zijn geraadpleegd. Het betreft publicaties van de volgende organisaties: ADAC (D), AECC(B), JRC(I) en TOI(N). De resultaten van deze studies komen redelijk tot goed overeen en stroken in grote lijnen met de praktijkmetingen van TNO en TUG. Bij een omgevingstemperatuur van 25 °C bedraagt de NO<sub>x</sub> praktijkemissie van dieselvoertuigen 400-500 mg/km (5-6 keer limietwaarde). Voor de emissiecomponenten CO, THC en PM is er geen sprake van overschrijding.

#### ***Eisen voor praktijkemissies in toekomstige Euro 6 wetgeving:***

Vanaf 1 september 2014 moeten alle nieuw ontwikkelde personenwagens voldoen aan de eisen van fase 1 van Euro 6. Deze wetgeving bevat nog geen specifieke eisen over de emissies in de praktijk en dwingt dus niet af dat dieselauto's het ook in de praktijk goed doen. Lage praktijkemissies voor NO<sub>x</sub> kunnen wel worden afgedwongen door aanvullende wetgeving met NO<sub>x</sub> emissies die in de praktijk moeten worden gehaald. Zolang dit niet gebeurt is er geen perspectief op lage praktijkemissies voor NO<sub>x</sub> van dieselpersonenauto's.

Op dit moment wordt in Brussel gewerkt aan de tweede fase van Euro 6, waarin dergelijke emissie-eisen voor de praktijk worden gedefinieerd. In aanvulling op de typekeuringstest in het laboratorium moet het voertuig voor fase twee Euro 6 ook op de weg met mobiele testapparatuur (PEMS) worden beproefd. Het is de verwachting dat door het stellen van praktischeisen NOx-emissies aanzienlijk zullen dalen. Bij Euro-VI vrachtwagens heeft de invoering van een nieuwe testmethode met mobiele meetapparatuur op de weg ook tot een aanzienlijke daling van de NOx-emissies geleid.

De Europese Commissie is voornemens om de tweede fase van Euro-6 in september 2017 in werking te laten treden. Vanuit de auto-industrie zijn er echter wensen voor uitstel naar een latere datum.

De voertuigtechnologie is echter beschikbaar om voertuigen aan fase twee eisen van Euro-6 te laten voldoen. Dit kan worden gerealiseerd door effectieve toepassing van EGR in combinatie met SCR of LNT systemen. Reeds in 2010 zijn metingen verricht aan pre-Euro 6 diesellootvoertuigen, waarbij goede NOx prestaties werden vastgesteld. Vermoedelijk is een optimalisatieslag van kosten de reden geweest dat de huidige Euro 6 voertuigen in de praktijk slechter presteren.

## Summary

Results of a vehicle emission test program on behalf of the Dutch Ministry of Infrastructure & the Environment show higher real world NO<sub>x</sub> emissions of Euro 6 diesel passenger vehicles than would be expected on basis of the Euro 6 Type Approval emission levels. The Euro 6 type approval limit value comes into force in 2014 and it aims at a substantial reduction of pollutants of passenger cars and light commercial vehicles.

In spite of the tightening of the Euro 5 NO<sub>x</sub> limit value (180 mg/km) to Euro 6 (80 mg/km) real world NO<sub>x</sub> emissions of tested Euro 6 vehicles are approximately 500 mg/km and they are equal approximately to Euro 4 and Euro 5 diesel passenger vehicles.

On behalf of the Dutch Ministry of Infrastructure and The Environment TNO investigated real world emission performance of Euro 6 diesel passenger cars. The results of the test program are the basis of the determination of Dutch emission factors. Furthermore the Ministry requested TNO to define measures for low real world emissions which are in line with type approval emissions.

The vehicle emission tests are carried out in a laboratory on a chassis dynamometer as well as on the road with a portable emission measuring system (PEMS). All these Euro 6 diesel passenger cars comply with the NO<sub>x</sub> type approval limit values of 80 mg/km. However real world NO<sub>x</sub> results are approximately 6 times higher. Only one vehicle performed under real world conditions well below (25-75 mg/km) the NO<sub>x</sub> limit value.

Structure of the study:

This study is based on emission test results of diesel passenger cars. In 2010 and 2013 the tests were carried out in a laboratory and on the road. The test results are reviewed on the basis of the applied aftertreatment technologies. Furthermore Euro 6 emission factors are determined and compared with former emission factors. All test results are compared with test results of a number of European research institutes. Finally on basis of these results recommendations for low real world emission test procedures are made for future legislation.

**Cause for concern:**

In spite of the continuous tightening of the NO<sub>x</sub> type approval-limit values from Euro 1 to Euro 6, last decade the NO<sub>x</sub> emission factors on the motorway have been more or less stable (400-600 mg/km). However there is a reduction in city traffic (from 1000 – 200 mg/km) but this still is more than the type approval limit value of 80 mg/km.

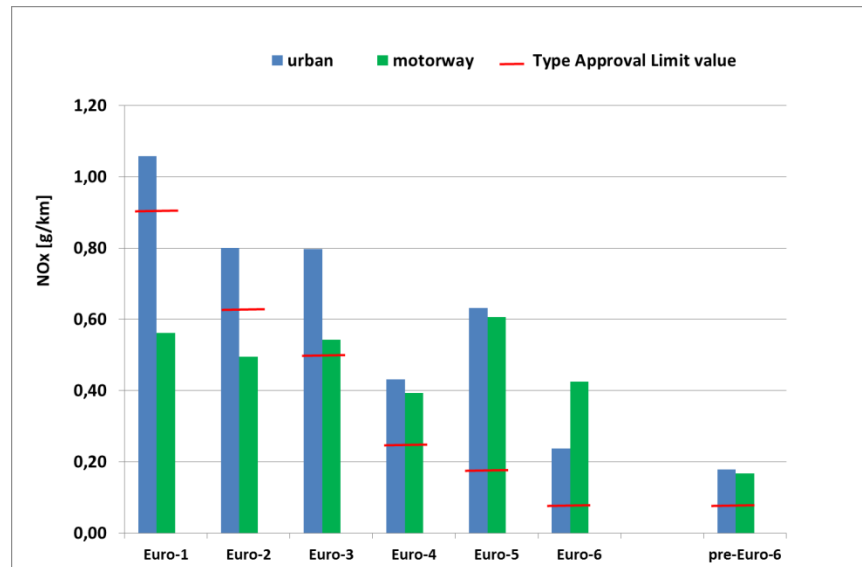


Figure 2: NOx emission factors in the city and on the highway and type approval limit values of diesel passenger cars.

In 2010 some emission tests were carried out on the first Euro 6 diesel passenger cars. These pre Euro 6 vehicles which were available for the US-market performed better than the current Euro 6 production models.

Up to 2013 only a few Euro 6 diesel vehicles were sold, and mainly in the upper market segment. Small new diesel vehicles are still not equipped with Euro 6 technology. However, they must comply to type approval values in 2014 and all new vehicles must comply one year later. Presumably, the smaller diesel vehicles will be equipped with cheap technology. This may lead to different (higher!) real world emissions and adjustment of current Euro 6 emission factors.

The test results of Euro 5 and 6 petrol vehicles certainly show low real world NO<sub>x</sub> emissions (< 80 mg/km).

#### **Applied exhaust aftertreatment technology is a key element:**

Real world NO<sub>x</sub> emissions of Euro 6 diesel passenger cars vary very strongly. Dependent on the test conditions and vehicle technology the spread is 10% to 1000% of the limit value. This is mainly caused by the type, the functionality and the control strategy of the exhaust after-treatment technology. Available technologies are EGR (Exhaust Gas Recirculation), SCR (Selective Catalytic Reduction) and LNT (Lean NO<sub>x</sub> Trap). Euro 5 as well as Euro 6 vehicles make selective use of these technologies which take care of NO<sub>x</sub> reduction in the exhaust gases. During type approval tests the control strategies are active and effective, but during real world operation the systems can be (partly) switched off.

In this test program the selected vehicles are classified in the upper segments and equipped with EGR and SCR or LNT technologies. The small Euro 6 diesel vehicles are still not on the market. These smaller and middle segments will be the bulk of the total fleet of diesel vehicles and probably they will be equipped with cheaper technology. Manufacturers only apply EGR-technologies, SCR and LNT technologies which are able to produce low real world NO<sub>x</sub> emissions probably will not be applied widely. Like with Euro 5 diesel vehicles this is a risk for high NO<sub>x</sub>

emissions on the motorway. It is expected that real world NO<sub>x</sub> emissions of small Euro 6 vehicles will be on the same level as the real world NO<sub>x</sub> emissions of Euro 5 diesel vehicles.

#### **Vehicle emission test results of TUG and TNO:**

All Euro 6 diesel vehicles comply with their NO<sub>x</sub> type approval limit values of 80 mg/km but the effect of the applied technologies under real world conditions is restricted. This is measured in tests which are more related to daily use. On the chassis dynamometer this is the CADC-test and on the road tests are performed in the city, rural roads and motorways. Again the real world NO<sub>x</sub> emissions are on average 400-500 mg/km. In road tests on public roads (city, rural, motorway) average NO<sub>x</sub> emissions of 550 – 800 mg/km are measured, this 7-10 times the type approval value. Furthermore, the spread of the different vehicles is huge (up to 10 times). Only one vehicle with EGR and LNT technology performed under real world conditions below the type approval limit value of 80 mg/km.

For all technologies CO, THC and PM real world emissions are below their type approval limit values.

The results of this test program are confirmed by literature and the test results of the Technical University of Graz (TUG). Although the number of tested vehicles is low it is not expected that these emission factors will change in case of more available test results. This means that real world NO<sub>x</sub> emissions of Euro 3,4,5 and 6 vehicles not really differ.

#### **Results literature research**

Four European sources with emission test results of Euro 6 vehicles have been investigated. It concerns publications of ADAC (D), AECC(B), JRC(I) en TOI(N). The results of these studies agree reasonably with the real world test results of TUG and TNO. At ambient temperatures of 25 °C the real world NO<sub>x</sub> emission of diesel passenger cars are 400-500 mg/km (5-6 times of the type approval limit value). The CO, THC and PM real world test results do not exceed the type approval limit values.

#### **Requirements for future Euro 6 emission legislation:**

On September 1st, 2014 all new vehicle types must comply with Euro 6 stage 1 regulation. This regulation does not contain specific requirements for real driving emissions (RDE) and does not force manufacturers to achieve low real world emissions. However, low real world NO<sub>x</sub> emissions can be reached with appropriate legislation with real world NO<sub>x</sub> emission requirements. As long as this legislation comes not into force low real world NO<sub>x</sub> emissions of diesel cars will probably not be realized.

Currently stage 2 of Euro 6 legislation is under construction in Brussels which will contain requirements for real world emissions. In addition to chassis dynamometer tests vehicles will be tested on the road with PEMS equipment. It is expected that real world emission requirements will lead to lower real world NO<sub>x</sub> emissions of diesel passenger cars.

In case of Euro VI trucks the enforcement of new test methods with mobile test equipment has led to a strong reduction of real world NO<sub>x</sub> emissions.

In September 2017 the European Commission resolves the enforcement of phase 2 of the Euro 6 legislation but the automotive industry prefers to postpone this. However, the Euro 6 phase 2 technology is already available. Low real world NO<sub>x</sub> emissions can be reached by application of EGR technology in combination with



SCR or LNT technology. In 2010 lower NO<sub>x</sub> emissions were already measured. Presumably an optimization of costs of aftertreatment technologies causes the worse performance of Euro 6 vehicles in real world operation.

# Contents

|  |           |
|--|-----------|
| <b>Samenvatting</b> .....                      | <b>2</b>  |
| <b>Summary</b> .....                           | <b>6</b>  |
| <b>1 Introduction</b> .....                    | <b>11</b> |
| 1.1 Background.....                            | 11        |
| 1.2 Aim and approach.....                      | 12        |
| 1.3 Structure of the report.....               | 12        |
| <b>2 Method</b> .....                          | <b>13</b> |
| 2.1 Tested vehicles.....                       | 13        |
| 2.2 Test methods and test cycles .....         | 14        |
| 2.3 Vehicle emission factors .....             | 18        |
| <b>3 Emission reduction technologies</b> ..... | <b>20</b> |
| 3.1 Petrol vehicles .....                      | 20        |
| 3.2 Diesel vehicles.....                       | 20        |
| <b>4 Investigations of public data</b> .....   | <b>23</b> |
| 4.1 ADAC test results .....                    | 23        |
| 4.2 TOI test results .....                     | 23        |
| 4.3 AECC test results .....                    | 24        |
| 4.4 Joint Research Centre data.....            | 28        |
| 4.5 Conclusions public data.....               | 29        |
| <b>5 Experimental results</b> .....            | <b>30</b> |
| 5.1 TNO results.....                           | 30        |
| 5.2 TUG data and results.....                  | 35        |
| <b>6 Discussion</b> .....                      | <b>38</b> |
| <b>7 Conclusions</b> .....                     | <b>40</b> |
| <b>8 References</b> .....                      | <b>41</b> |
| <b>9 Signature</b> .....                       | <b>42</b> |
| <b>Appendices</b>                              |           |
| A TNO chassis dynamometer test results         |           |
| B Determination of emission factors            |           |

# 1 Introduction

## 1.1 Background

To minimize air pollutant emissions of light duty vehicles the Euro emissions standards were introduced in 1992. The Euro emissions standards becoming more stringent in the course of time. Currently produced light duty vehicles needs to comply with the Euro 5 standard. The Euro 6 standard will become mandatory in 2014. The standards apply for both spark ignition engines and for compression ignition engines and includes the following gaseous and particulate emissions:

- CO (carbon monoxide)
- THC (hydrocarbons)
- NO<sub>x</sub> (nitrogen oxides)
- PM (particulate mass)
- PN (particulate number)

As a result of the Euro emissions standards the pollutant emissions decreased a lot during the type approval test the past decade. However, some emissions under real driving conditions differ a lot from type approval emissions. The real driving NO<sub>x</sub> (nitrogen oxides) emissions of diesel vehicles are currently the largest issue with regard to pollutant emissions. The ambient NO<sub>2</sub> concentration exceeds the limits at numerous road-side locations in The Netherlands.

TNO performs emission measurements within the “in-use-compliance program for light duty vehicles” on behalf of the Dutch Ministry of Infrastructure and the Environment. Whereas in the early years, 1989-2000, many standard type approval tests were executed, in recent years the emphasis has shifted to the gathering of real world emission data on various nonstandard driving cycles. In the current program multiple Euro 6 diesel passenger cars are tested.

TNO develops annually updated vehicle emission factors based on the performed emission measurements, emission factors represent real world emission data for various vehicle types and different driving conditions. Vehicle emission factors are used for emission inventory and air quality monitoring. TNO is the sole supplier of primary data for this purpose in The Netherlands.

The emission factors for NO<sub>x</sub> emissions of Euro 5 diesel passenger cars were a lot higher than expected, see Table 1. The NO<sub>x</sub> emission factors of Euro 5 are in most cases even higher than Euro 4.

Table 1: Emission limits and emission factors for diesel passenger cars

| Emission standard | Emission limit NO <sub>x</sub> [g/km] | Emission factor NO <sub>x</sub> [g/km] |       |         |
|-------------------|---------------------------------------|--|-------|---------|
|                   |                                       | City                                   | Rural | Highway |
| Euro-1 (1993)     | 0.97*                                 | 0.73                                   | 0.45  | 0.56    |
| Euro-2 (1996)     | 0.7*                                  | 1.02                                   | 0.55  | 0.5     |
| Euro 3 (2000)     | 0.5                                   | 0.89                                   | 0.55  | 0.54    |
| Euro 4 (2005)     | 0.25                                  | 0.51                                   | 0.38  | 0.39    |
| Euro 5 (2009)     | 0.18                                  | 0.63                                   | 0.34  | 0.61    |
| Euro 6 (2014)     | 0.08                                  |  |       |         |

\*NO<sub>x</sub> + HC

In this report the first results of Euro 6 diesel passenger are discussed. Preliminary Euro 6 emission factors, used in previous years for prognoses are in between 0.08 g/km (80 km/h speed limit motorway) and 0.22 g/km (heavy congestion).

## **1.2 Aim and approach**

The objective of this research is to assess the real world emission performance of Euro 6 diesel passenger cars and to provide emission factors for this category.

In order to obtain a more comprehensive understanding of the emission performance, both measurements of TNO and TU Graz are evaluated as well as the available public data.

Emission measurements are performed with Euro 6 compliant vehicles (early models). Both chassis dynamometer and PEMS (Portable Emissions Measurement System) measurements are performed. On the chassis dynamometer various real driving cycles are used.

## **1.3 Structure of the report**

The project contains a literature survey, an experimental test program and an emission modelling program.

Chapter 1 describes the introduction, the aim and the approach. In chapter 2 the applied vehicles, testing methodologies and emission reduction technologies are described. In chapter 3 the emission reduction technologies are reported. In chapter 4 the available public data are described. In chapter 5 the experimental results are given and in chapter 6 the determination of the emission factors is reported.

## 2 Method

Available public data or publications are investigated and several Euro 6 vehicles are tested. These measured test results are the basis for the determination of the emission factors.

### 2.1 Tested vehicles

The tested vehicles are early models because Euro 6 is not yet mandatory (will become mandatory in 09-2014). Only compression ignition (diesel) vehicles are tested due to the fact that there are no expected direct issues with spark ignition (gasoline) vehicles regarding NO<sub>x</sub> emissions.

#### 2.1.1 TNO tested vehicles

The tested vehicles by TNO are either provided by the official Dutch importers or by private owners. In all cases the vehicles have exceeded the minimum requirement of 3.000 driven kilometres. TNO tested Euro 6 compliant vehicles in 2010 and in 2012/2013.

Table 2 shows the tested vehicles, the character indicates the brand, the number indicates a specific vehicle.

Table 2: TNO tested vehicles

| Vehicle ID            | -     | veh: H2                     | veh: H3                     | veh: A2                     | veh:E4*                     | veh: H4            | veh: H6            | Veh: E6            | Veh: J1            | Veh: J2            |
|-----------------------|-------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Engine Power class    | [kW]  | >150                        | >150                        | >150                        | 100 - 125                   | 125 - 150          | 100 - 125          | 100 - 125          | 100 - 125          | 100 - 125          |
| Engine capacity class | [cm3] | >2000                       | >2000                       | >2000                       | 1750 - 2000                 | 1750 - 2000        | 1750 - 2000        | 1750 - 2000        | 1750 - 2000        | 1750 - 2000        |
| Odometer              | [km]  | 2354                        | 16634                       | 9466                        | ±9400                       | 10965              | 28376              | 26200              | 20100              | 11616              |
| Fuel                  | -     | Diesel                      | Diesel                      | Diesel                      | Diesel                      | Diesel             | Diesel             | Diesel             | Diesel             | Diesel             |
| Inertia               | [kg]  | 1700                        | 1930                        | 2040                        | 1590                        | 1590               | 1470               | 1590               | 1590               | 1590               |
| Emission class        | -     | Euro 6                      | Euro 6                      | Euro 6                      | Euro 6                      | Euro 6             | Euro 6             | Euro 6             | Euro 6             | Euro 6             |
| Type                  | -     | Sedan                       | Sedan                       | Sedan                       | Sedan                       | Station            | Station            | Sedan              | MPV                | MPV                |
| Vehicles class        | -     | M1                          | M1                          | M1                          | M1                          | M1                 | M1                 | M1                 | M1                 | M1                 |
| Date                  | -     | 2010                        | 2010                        | 2010                        | 2010                        | 2012               | 2013               | 2013               | 2013               | 2013               |
| Emission technology   |       | EGR + SCR                   | EGR + LNT                   | EGR + SCR                   | EGR + LNT                   | EGR + SCR          | EGR + LNT          | EGR + SCR          | EGR                | EGR                |
| Remark                | -     | Prototype or for USA market | Prototype or for USA market | Prototype or for USA market | Prototype or for USA market | Production vehicle | Production vehicle | Production vehicle | Production vehicle | Production vehicle |

\*Three identical vehicles

The tested four vehicles in 2010 were prototypes or were meant for the USA market, all these vehicles are relatively large. In 2012 and 2013 five production vehicles are tested, also this vehicles are relatively large vehicles. The two vehicles of brand H are of the same model but with a different engine. The two vehicles of brand J are identical model and types. Furthermore the availability of Euro 6 compliant vehicles are still very scarce, especially for the compact cars .

### 2.1.2 TUG tested vehicles

TUG IVT is within Europe, besides TNO, the second party with an substantial test program for real world emissions of passenger cars. The PHEM emission model is used to generate the HBEFA emission factors, from this data, for a number of European countries, such as, Germany, Switzerland, Austria, and Sweden. The last years, with the availability of Euro 6 vehicles, these vehicles were incorporated in the test program. The current status is given in the table below:

Table 3: Available instantaneous emission data on Euro 6 diesel passenger cars at TUG.

| Vehicle ID | Vehicle make and model   | Rated power [kW] | Lab             |
|------------|--------------------------|------------------|-----------------|
| D6_v01     | Prototype from US market | 180              | TUG/chassisdyno |
| D6_v02     | Prototype from US market | 180              | TUG/chassisdyno |
| D6_v03     | Serial production EU6    | 180              | TUG/chassisdyno |
| D6_v04     | Serial production EU6    | 110              | TUG/chassisdyno |
| D6_v05     | Serial production EU6    | 125              | TUG/PEMS        |

### 2.1.3 Other parties

JRC is the third party with a test program for real-world emissions. However, there seems to be no systematic program for in-service conformity. Both the selection of vehicles as the test cycles are not controlled, to ensure a proper comparison between vehicles and Euro-classes, needed for emission inventories. The program seems designed to validate methodology rather than vehicles.

Other parties like ADAC, AECC and TOI have tested the same kind of vehicles as TNO and TUG. These test programs are limited, yet consistent. ADAC has a long-running program of vehicle testing for consumers. The TOI program is designed to provide insight in real-world emission of new technology.

## 2.2 Test methods and test cycles

Both chassis dynamometer and PEMS (Portable Emissions Measurement System) measurements are performed in various test cycles.

### 2.2.1 Chassis dynamometer testing

The vehicles are tested according to the official test procedure (UNECE Reg 83) and by using different driving cycles with warm or hot start conditions. The following regulated emissions were measured: CO (carbon monoxide), THC (total hydrocarbons), NO<sub>x</sub> (nitrogen oxides), PM (particulate mass) and PN (particulate number). Additionally CO<sub>2</sub> (carbon dioxide) is measured. Table 4 gives an overview of the used measuring methods.

Table 4: Measurement principles

| Component       | Analyse   |
|-----------------|---|
| CO              | NDIR, Non Dispersive Infrared   |
| HC              | Heated Flame Ionization Detection HFID                                  |
| NO <sub>x</sub> | Chemo Luminescence (CLA)  |
| CO <sub>2</sub> | NDIR  |
| PM              | Gravimetric   |
| PN              | Condensation Particle Counter (CPC) with Volatile Particle Remover(VPR) |

For the tests regular diesel is used, not reference fuel, the influence of reference fuel on emissions is expected to be relatively small and in addition under real world conditions there is also no reference fuel applied.

Road load settings were for each vehicle provided by the manufacturer. If necessary also a chassis dynamometer 'test mode' was activated in order to avoid problems with start stop, ESP, etc. In some cases the manufacturer was present during the tests.

#### Used driving cycles

The following driving cycles are used to assess the emission performance of the Euro 6 vehicles:

- NEDC (New European Driving Cycle)  
The NEDC (see Figure 3) is used for the official type approval, during this test the emissions need to comply with the applicable limit. The NEDC consists of the UDC (Urban Driving Cycle) and the EUDC (Extra Urban Driving Cycle). Officially the NEDC begins with cold start. The emission results of the NEDC with cold start are used to check whether the vehicle complies with the Euro 6 limit and to check if the vehicle is technically in good condition. Some vehicles are additionally tested over a NEDC with a hot start to gain more information about the emission performances.  
The NEDC pattern is not dynamic and does not look like real world driving. The largest part (in time, not in distance) of the NEDC is urban driving, this is a disadvantage for heavy and high-powered vehicles. The NEDC is relatively short ( $\pm 11$  km), as a result the cold start effect is quite large. During the cycle the engine loads are very low, engine efficiencies at low engine loads are mostly not optimal.
- CADC (Common Artemis Driving Cycle):  
The CADC (see Figure 4) is a cycle which represents real world driving better than the NEDC, however, the CADC is not part of the official type approval procedure.  
The cycle consists of an urban, rural and motorway part. For the motorway part there are two possibilities, a maximum speed of 130 km/h or 150 km/h. In this report the results of the CADC with 130 km/h motorway part are reported.  
A cold and hot start are both possible with the CADC, in this report the CADC with hot start is for most tested vehicles shown. In the most recent tests also CADC's with cold start are performed, during these tests a second urban part is driven directly after the motorway part, the result is a CADC with a cold and hot urban part.  
The CADC is more dynamic and reaches higher speeds than the NEDC.  
The cycle is a lot longer than the NEDC ( $\pm 45$  km), hence the relative cold start effect is not very large on the total emission.
- WLTC (Worldwide harmonized Light duty driving Test Cycle):  
The currently European used type approval procedure and test cycle (NEDC) for light duty vehicles are not worldwide accepted and produce emission results (in particular CO<sub>2</sub> and NO<sub>x</sub>) that do not correspond very well to real world emission results. An important point of discussion of the current procedure is

the driving cycle. Currently a new worldwide harmonized type approval procedure for light duty vehicles is under development which involves a new driving cycle.

The WLTC (see Figure 5) consists of four parts: low, medium, high and extra high. When the cycle is approved as part of official legislation it most likely begins with a cold start. In this program the WLTC is mostly performed with a hot start and in some cases with a cold start.

The cold start effect is lower than with the NEDC because of the length of cycle ( $\pm 45$  km). The WLTC is more dynamic and reach higher speeds than the NEDC, however, it is less dynamic than the CADC.

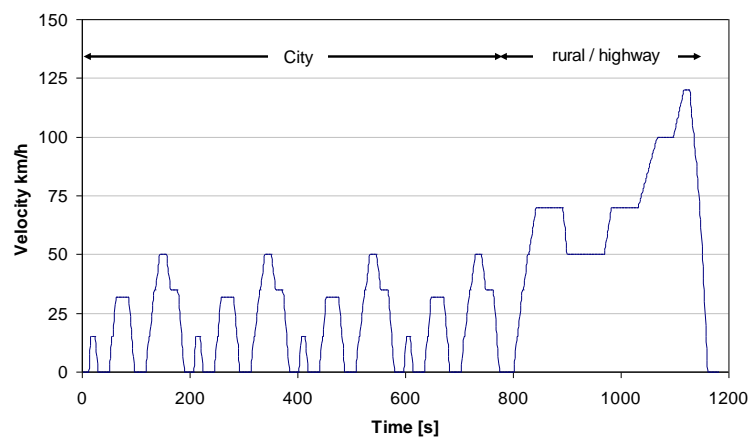


Figure 3: NEDC (New European Driving Cycle)



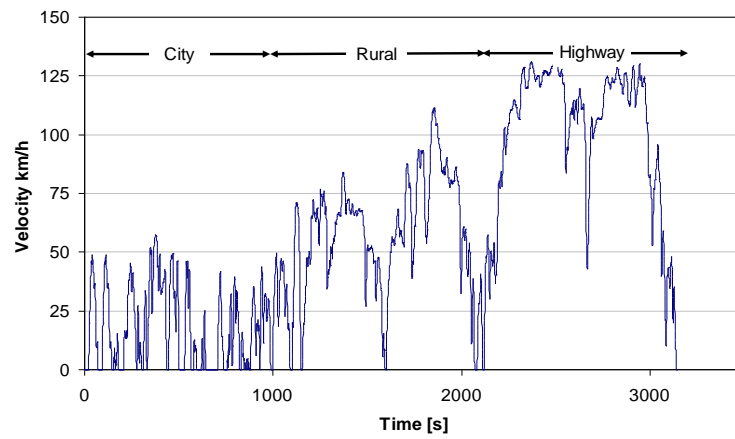


Figure 4: CADC (Common Artemis Driving Cycle)

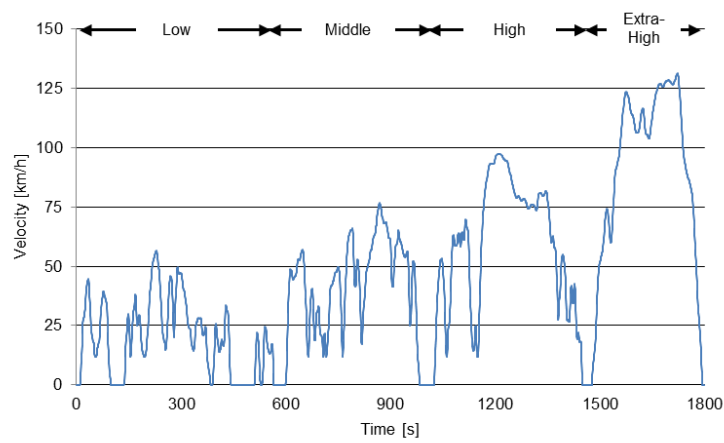


Figure 5: WLTC\_v5 (Worldwide harmonized Light duty driving Test Cycle)

### 2.2.2 PEMS testing

With two Euro 6 vehicles (E6 and J1) measurements with PEMS (Portable Emissions Measurement System) are performed. PEMS tests are performed on the road under real world conditions. With the PEMS equipment of TNO it is possible to measure CO, CO<sub>2</sub>, HC and NO<sub>x</sub> emissions in g/km. The vehicle is fully loaded during PEMS tests because two persons are needed (1 driver, 1 engineer) and the equipment (including generator) weighs approximately 200 kg.

All kind of driving patterns are possible with PEMS. In order to be able to compare tests with each other, TNO always drives a 'reference trip'. The reference trip consist of urban, rural and highway driving. Additionally some other trips are driven: constant speed, urban driving and highway driving, see table below for details.

Table 5: PEMS trips

| Trip type      | Length [km] | Duration [s] | Average speed [km/h]      |
|----------------|-------------|--------------|---------------------------|
| Reference      | 72          | 5000-6000    | 43-51                     |
| Constant speed | Several     | 300-450      | 50,80,100,120,130,140,150 |
| Urban          | 25,5        | 3600-4100    | 23-27                     |
| Highway        | 90          | 3450-3650    | 89-91                     |

## 2.3 Vehicle emission factors

Emission factors for Euro 6 will be preliminary. However, new emission factors are needed as the current factors, based on the expectation of successful emission control in combination with the Euro 6 emission limits, are no longer tenable with the currently available measurements. The new emission factors are larger than the current estimates, but will probably be slightly lower than the values of next year when a substantial group of Euro 6 vehicles and models can be measured. The expectation is based on the experiences with the introduction of Euro 4 and the introduction of Euro 5. In both cases the initial expectations were not met, and the NO<sub>x</sub> emissions remained at more or less the same levels as before.

The current estimates for the diesel Euro 6 NO<sub>x</sub> and NO<sub>2</sub> emission factors are given in the table below. The table contain both the emission factors for SRM1 (including motorway average) and the SRM2 (the detailed motorway emission factors).

Table 6 Preliminary emission factors for the air-quality model (SRM1 and SRM2)

| [mg/km]  | emission estimate | NO <sub>x</sub> | NO <sub>2</sub> |
|----------|-------------------|-----------------|-----------------|
| urban    | Congested         | 379             | 119             |
|          | Normal            | 237             | 71              |
|          | free-flow         | 252             | 69              |
| rural    | Normal            | 202             | 53              |
| motorway | Average           | 425             | 129             |
|          | Congested         | 377             | 132             |
|          | 80 km/h           | 260             | 76              |
|          | 100 km/h control  | 387             | 122             |
|          | 100 km/h          | 394             | 123             |
|          | 120 km/h          | 437             | 131             |
|          | 130 km/h          | 468             | 138             |

Advanced NO<sub>x</sub> reduction technologies are needed to comply with the Euro 6 NO<sub>x</sub> limit value. To provide better understanding of these technologies the most common used reduction technologies are identified and shortly described in chapter 3.

## 3 Emission reduction technologies

### 3.1 Petrol vehicles

The Euro 6 emission limit values for light duty vehicles with spark ignition engines (petrol engines) are equal to Euro 5 limit values. Euro 5 petrol vehicles show already good real world (pollutant) emission performances. The three-way catalyst in combination with an accurate air-fuel control is the mainstream technology with very high reduction rates of CO, THC and NO<sub>x</sub> emissions. The last few years engines with direct fuel injection are often used to obtain higher engine efficiencies (and lower CO<sub>2</sub> emissions). The disadvantage of direct fuel injection is the possibility of higher PN emissions which will possibly require extra emission reduction technologies like a gasoline particle filter (GPF).

### 3.2 Diesel vehicles

The Euro 6 emission NO<sub>x</sub> limit values (80 mg/km) for light duty vehicles (class M1) with compression ignition engines are more stringent than the Euro 5 limit values (180 mg/km). Under real world conditions the NO<sub>x</sub> emissions of Euro 5 diesel vehicles are often much higher than during the type approval test. Particulate emissions and CO and HC emissions of Euro 5 diesel vehicles are under control under real world conditions as a result of the applied DPF (diesel particulate filter) and oxidation catalyst.

To reduce NO<sub>x</sub> emissions different technologies can be used. The mainstream applied reduction technology for Euro 5 is EGR (exhaust gas recirculation).

To comply with the Euro 6 limit more advanced technologies are needed. The following technologies are most used in combination with EGR:

- Improved EGR (cooled low and high pressure EGR).
- Reduced engine compression ratio in combination with high pressure EGR.
- SCR (selective catalytic reduction) in combination with high pressure EGR.
- LNT (Lean NO<sub>x</sub> Trap) in combination with high pressure EGR.

Active (engine) control is needed for NO<sub>x</sub> reduction with EGR, SCR and LNT systems. The NO<sub>x</sub> reduction strongly depends on the engine and EGR maps and SCR and LNT control.

#### **Improved EGR (Exhaust Gas Recirculation)**

NO<sub>x</sub> emissions are mainly produced at high pressures and temperatures during the combustion. With EGR (cooled) exhaust gas is recirculated back to the combustion process. Due to the recirculated exhaust gas there is less oxygen available for combustion, as a result the combustion (peak) temperatures lowered, hence NO<sub>x</sub> emissions decrease. The efficiency of EGR depends on the EGR rate (the amount of recirculated exhaust gas) and its temperature. The possible EGR rate depends on various parameters (such as engine load) and needs to be controlled precisely. The disadvantage of EGR is the increase of the PM emissions (engine out) and increase of fuel consumption and the possible contamination of the inlet trajectory. A higher EGR rate causes lower NO<sub>x</sub> emissions but also higher engine out PM emissions. Due to higher engine out PM emissions the DPF needs to regenerate (combustion of the stored particles in the DPF) more often.

For Euro 5 vehicles 'high pressure' cooled EGR is most often used. With high pressure EGR the exhaust gases are guided and cooled from upfront the exhaust turbine to the inlet trajectory of the engine.

To comply with the Euro 6 limit small diesel vehicles can be equipped with an advanced or improved EGR system without application of NO<sub>x</sub> aftertreatment systems. Improved EGR is the combination between cooled low and high pressure EGR. With low pressure EGR the exhaust gases are guided from after the exhaust turbine and DPF to upfront the inlet turbine (ambient pressure). The advantages of low pressure EGR are better cooling possibilities (enables higher EGR rates and operation at higher engine load conditions), less contamination (because of the filtered exhaust gas) and better mixture with the fresh air. However, there is a risk of condensates within the EGR- and intercooler with strongly cooled EGR, the condensates can possibly cause maintenance problems. Also the combination with high pressure EGR is still needed for proper reaction on engine load variations.

### **Reduced engine compression ratio**

As mentioned in the previous paragraph high pressure and temperature during the combustion cause high NO<sub>x</sub> emissions. By reducing the engine compression ratio peak combustion temperatures and pressures are lowered and the ignition delay will increase, hence less NO<sub>x</sub> emissions are produced.

The compression ratio is typically lowered from 17-18,5 to  $\pm 14.0$ . The disadvantage of lowering the compression ratio is a decrease in engine efficiency (and thus higher fuel consumption) and the HC/CO control will become more challenging. Combination with EGR is needed to fulfill the Euro 6 limit.

### **Injection timing**

The timing of the fuel injection in the cylinder has a substantial influence on the NO<sub>x</sub> emissions. A delayed injection will reduce the engine efficiency, but, at the same time it will yield a reduction of the NO<sub>x</sub> formation and emission.

### **SCR (selective catalytic reduction)**

A SCR system is the combination between a catalyst and the injection of urea upfront the catalyst. Above  $\pm 190^{\circ}\text{C}$  the urea is converted to ammonia (NH<sub>3</sub>) which reacts with NO<sub>x</sub> in the SCR-catalyst. The catalyst converts NO<sub>x</sub> and NH<sub>3</sub> into N<sub>2</sub> and H<sub>2</sub>O. However, the temperatures of diesel exhaust gases are relative low and the SCR catalyst needs a temperature of approximately 190 to 500°C to work properly, therefore the vehicle needs to be warmed up before the SCR system is working properly. Short trips in the city with low engine loads are therefore not optimal for a SCR system, hence the combination with EGR is necessary to comply with the Euro 6 limit values.

The AdBlue (urea + water) is stored in a separate tank in the vehicle and needs to be refilled during service intervals.

### **LNT (Lean NO<sub>x</sub> Trap)**

The Lean NO<sub>x</sub> Trap (or LNC, Lean NO<sub>x</sub> Catalyst) reduces NO<sub>x</sub> emissions by a frequent cycle of NO<sub>x</sub> storage and release due to catalytic reaction by applying periodic lean and rich air/fuel mixtures. During lean air/fuel mixture period NO<sub>x</sub> is stored, when the Trap reach the max capacity a rich mixture is used to convert the NO<sub>x</sub> emissions into N<sub>2</sub> en O<sub>2</sub>.

The LNT needs to have a temperature between approximately 250-400°C to work properly. Dependent of the NO<sub>x</sub> conversion rate and the specifications of the catalyst an increase in fuel consumption of 1 to 4% is possible. With dynamic engine loads and a cold engine the LNT performs not very efficient. Most ideal conditions are static or low engine loads and a warm engine. The combination with EGR is necessary to comply with the Euro 6 limit values.

## 4 Investigations of public data

Four external publications of Euro 6 real world emissions were found and investigated.

### 4.1 ADAC test results

ADAC tested 7 Euro 6 vehicles [ADAC 2011]. In Figure 6 it is shown that all Euro 6 vehicles comply in the NEDC Type Approval test with the NO<sub>x</sub> limit of 80 mg/km. However a NEDC test with hot start results in higher NO<sub>x</sub> emissions, some vehicles emit 350 mg/km. Furthermore these vehicles emit on the highway 150 – 1100 mg/km (average appr. 500 mg/km).

ADAC states: “Euro 6 diesel vehicles must also effectively reduce NO<sub>x</sub> and NO<sub>2</sub> emissions in off-cycle conditions (i.e. CADC test cycle)”.

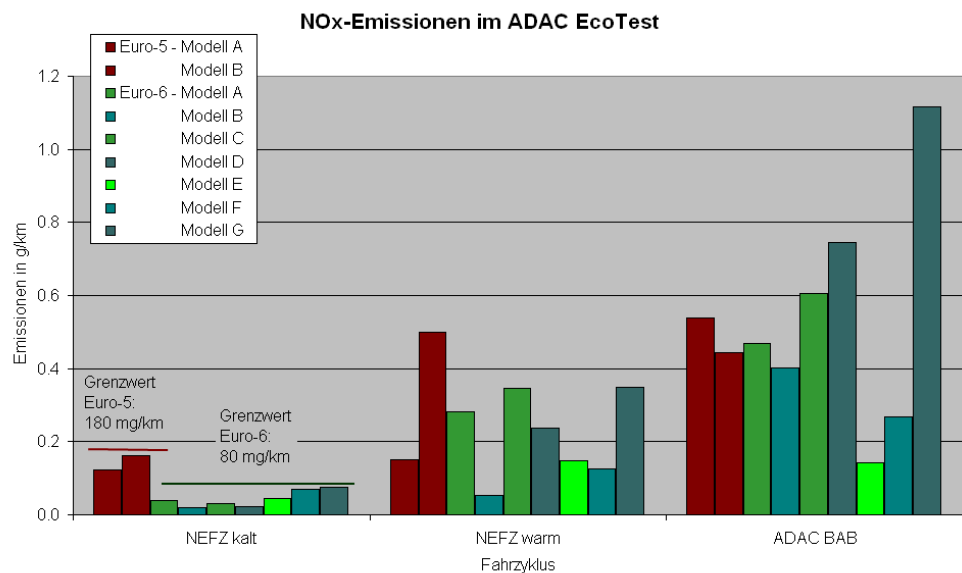


Figure 6: ADAC Ecotest results Euro 5 and 6 vehicles

### 4.2 TOI test results

The Institute of Transport Economics in Norway tested 2 Euro 6 vehicles [TOI 2013] in an urban test cycle. This Helsinki test cycle has a length of 7,8 km and a duration of 23 minutes and a maximum vehicle speed of 60 km/h. The tests were performed at -7 °C and + 23 °C and started all with a cold and hot engine.


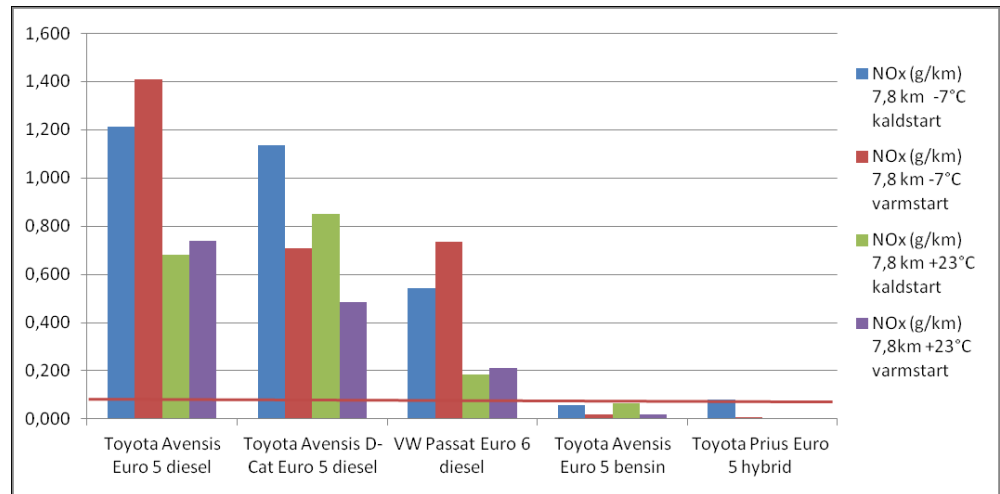


Figure 7: Emissions of NO<sub>x</sub> from six light vehicles tested with the Helsinki city cycle at -7°C and +23°C with cold and warm engine start (Source: TOI-Norway)

The results of the two Euro 6 vehicles of Figure 7 show NO<sub>x</sub> emissions of approximately 180 – 780 mg/km. On average the real world NO<sub>x</sub> emissions in urban conditions are 400 – 500 mg/km.

### 4.3 AECC test results

AECC, the Association for Emissions Control by Catalyst, conducted a test program to compare the newly developed World-harmonized Light vehicles Test Cycle (WLTC) with the current European regulatory New European Drive Cycle (NEDC) and the cold-start Common Artemis Driving Cycle (CADC) [AECC 2013a]. Vehicle engines and aftertreatment technologies were selected to cover a wide range of future systems. Six European commercially available passenger cars were chosen: three Euro 5 Gasoline Direct Injection cars, two Euro 6 Diesel cars and a Euro 5 non-plug-in gasoline hybrid car. Investigations on the test temperature were also conducted by comparing emissions at 25°C and at -7°C. The study isolated cycle-to-cycle effects on emissions for each vehicle by normalizing the test mass in

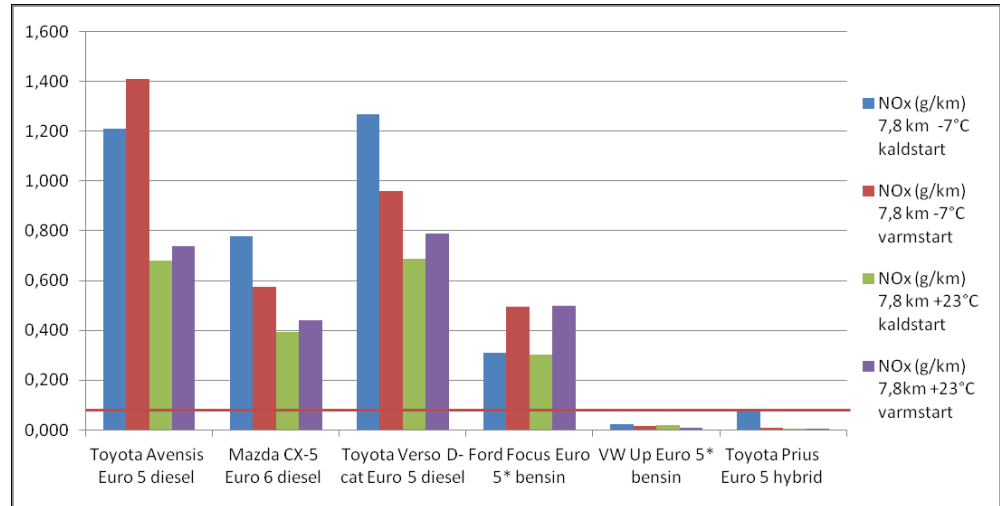

all tests to the draft WLTP (World-harmonized Light vehicles Test procedure) Global Technical Regulation (gtr).

NO<sub>x</sub> emissions measured on NEDC, CADC and cold-start WLTC are shown in Figure 8. Some NO<sub>x</sub> emissions results on NEDC are slightly above the regulatory limit. However, as described earlier in Figure 5, vehicles inertia used in this test campaign was higher than the value used at type-approval. This may explain the impact on NO<sub>x</sub> emissions on NEDC. Except for vehicle C, NEDC and WLTC are very similar in terms of NO<sub>x</sub> emissions. Nevertheless, both the Artemis CADC and WLTC highlight some increase in NO<sub>x</sub> emissions

on the lean GDI car (vehicle C) compared to the regulatory NEDC.

The Artemis CADC also highlights the higher NO<sub>x</sub> emissions in real-world of current diesel cars (vehicles E and F). This is in line with other measurements and is being addressed by the European Commission developing real-driving emissions provision for the second stage of the Euro 6 legislation.

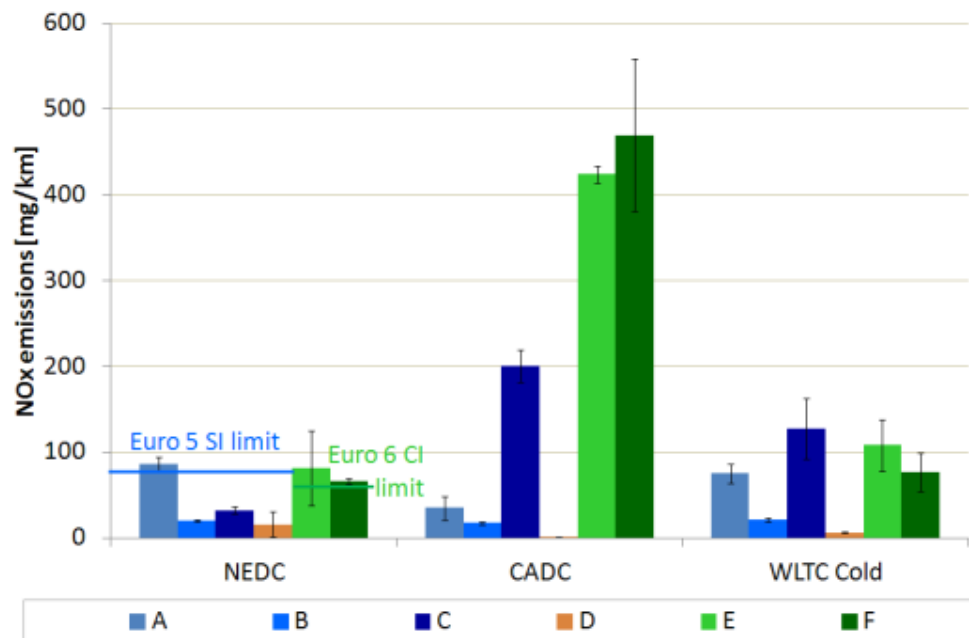


Figure 8: NO<sub>x</sub> emissions @ ambient temperature 25 °C (Source AECC)

#### Influence of ambient temperature on NO<sub>x</sub> Emissions:

As illustrated by Figure 9, NO<sub>x</sub> emissions of all vehicles increased when cars were tested at -7°C. However, the influence is the largest on diesel cars, which can emit 800 to 1000 mg/km of NO<sub>x</sub> on NEDC and WLTC. This is more than ten times the NEDC Euro 6 limit value of 80 mg/km and highlights that without a regulatory limitation of Diesel NO<sub>x</sub> emissions at low temperature as is currently being investigated by the European Commission, NO<sub>x</sub> emissions at low temperatures may not be controlled.

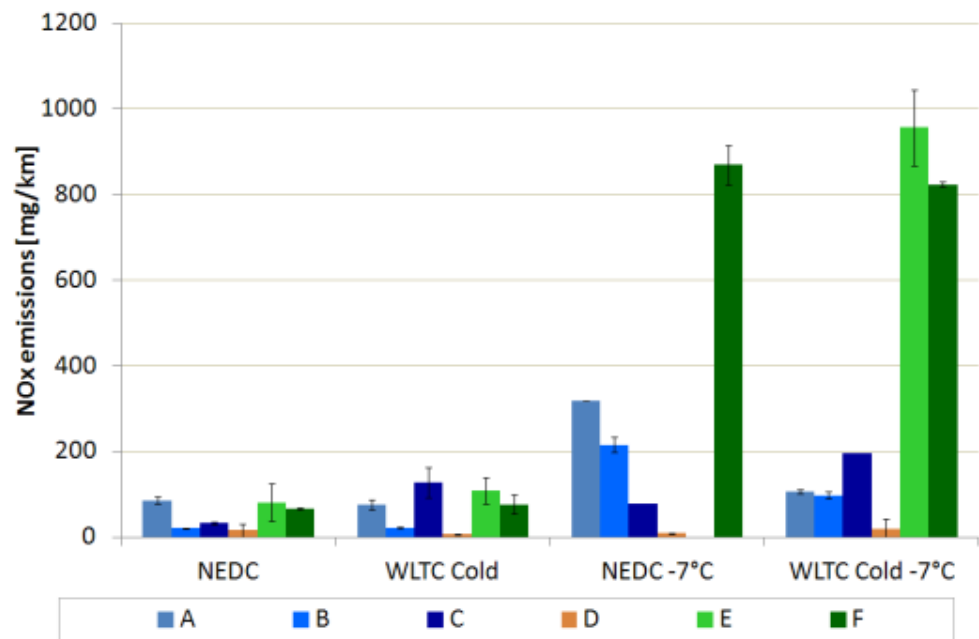


Figure 9: NO<sub>x</sub> emissions at 25°C and -7°C on NEDC and CADC (Source AECC)

One of the AECC conclusions is:

*CADC emissions results highlighted some higher NO<sub>x</sub> emissions from diesel vehicles and somewhat higher NH<sub>3</sub> emissions from stoichiometric gasoline cars. As high NO<sub>x</sub> emissions have also been reported for modern diesel cars in real-driving conditions, this tends to confirm that CADC is closer to real-world driving than NEDC or even WLTC. There was little difference for other emissions though, including CO<sub>2</sub>.*

In a second publication [AECC 2013b] four Euro 6 diesel vehicles were investigated. See vehicles 12, 13, 14 and 19 in Figure 10 up to Figure 13. From these test results it is shown that CO, THC and PM emissions of the Euro 6 vehicles are below all limit values. However the NO<sub>x</sub> emissions of three vehicles in the CADC test cycle, which represents real world conditions, are 25 – 572 mg/km and three samples exceed the limit values.

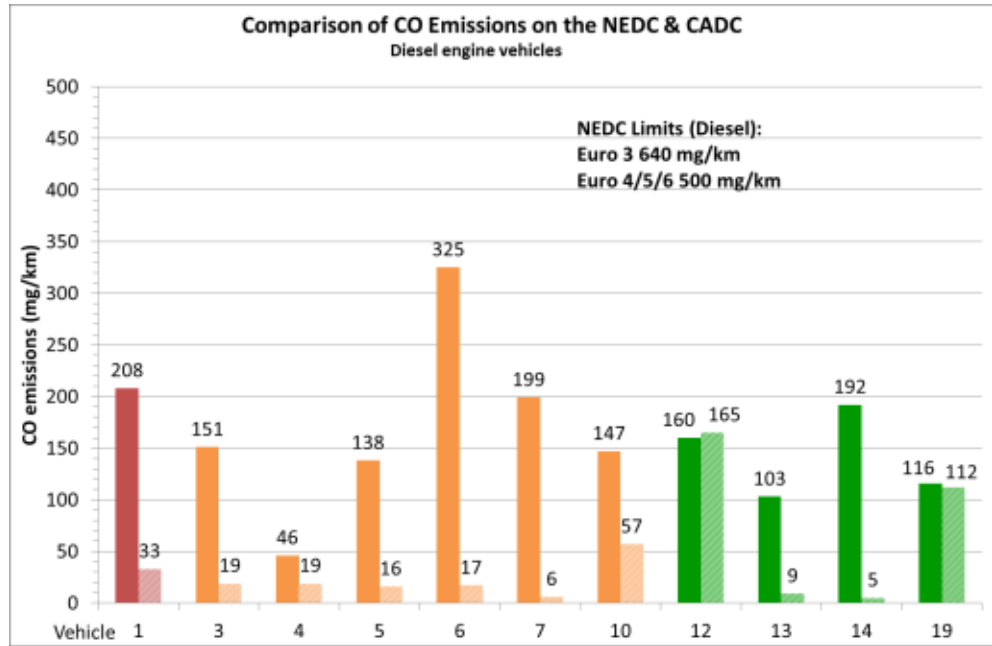


Figure 10: Diesel CO results over full NEDC and CADC tests (Source AECC)

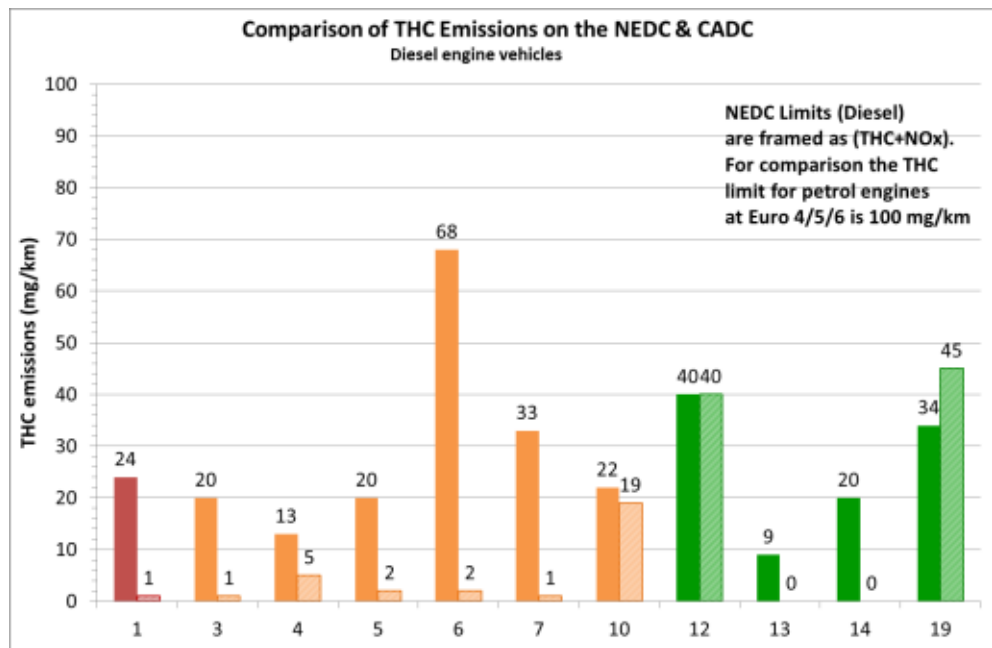


Figure 11: Diesel THC results over full NEDC and CADC tests (Source AECC)

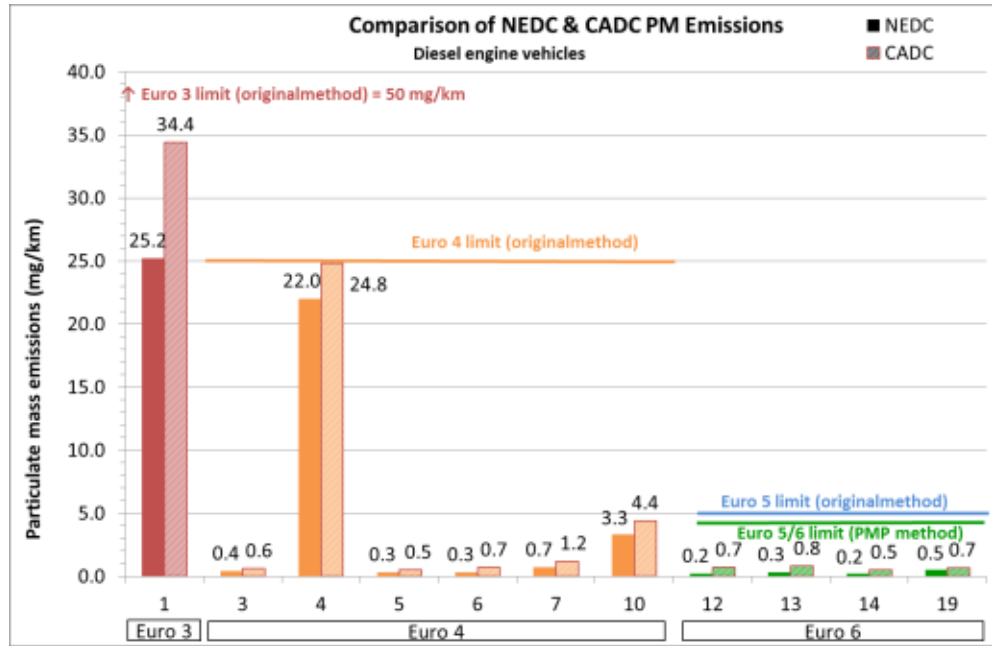


Figure 12: Diesel PM results over full NEDC and CADC tests (Source AECC)

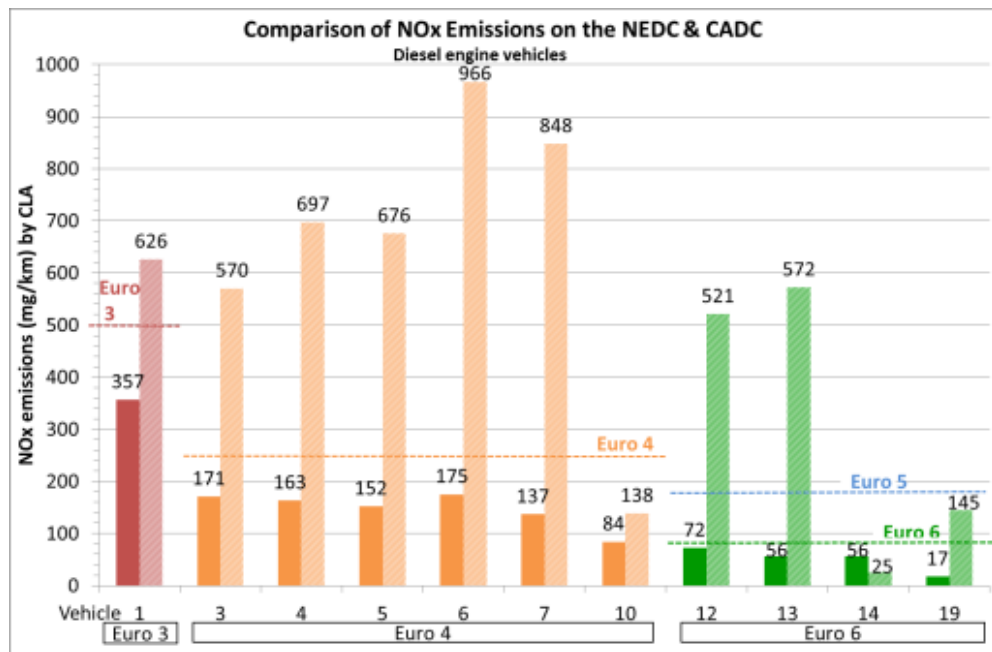


Figure 13: Diesel NOx results over full NEDC and CADC tests (Source AECC)

#### 4.4 Joint Research Centre data

DG-JRC conducted a test program with one Euro 6 diesel vehicle. Laboratory as well as real world tests were performed [JRC 2012]. Real world NO<sub>x</sub> emissions exceed the Type Approval limit values.

*“The Euro 6 diesel car shows in the laboratory substantially lower NO<sub>x</sub> emissions (0.07 +/- 0.004 g/km) than the Euro 4 car (0.29 g/ km) and the four Euro 5 cars (0.20 +/- 0.04 g/km). More importantly, the Euro 6 car also shows substantially lower on-road NO<sub>x</sub> emissions (0.21 +/- 0.09 g/km) than the Euro 4 cars (0.76 +/- 0.12 g/ km) and Euro 5 cars (0.71 +/- 0.30 g/km)”.*

#### **4.5 Conclusions public data**

All public sources [ADAC 2011], [AECC 2013a] , [AECC 2013b] and [TOI 2013] report for diesel Euro 6 vehicles average real world NO<sub>x</sub> emissions of 400 – 500 mg/km @ 25 °C. For lower ambient temperatures the NO<sub>x</sub> emissions are even higher.

The other pollutant emissions (CO, THC and PM) do not exceed the Type Approval limit values.

For direct injected gasoline Euro 6 engines PN test results do not comply with future standards. It is expected that Gasoline Particulate Filters are needed to comply with future requirements.

## 5 Experimental results

In this chapter the test results of the emission measurements of TNO, TUG and from public data are shown.

### 5.1 TNO results

TNO performed chassis dynamometer and PEMS tests, both results are shown in the following paragraphs. Detailed results are reported in Appendix A .

#### 5.1.1 Chassis dynamometer results

##### NO<sub>x</sub> emissions

Figure 14 up to Figure 16 show the NO<sub>x</sub> emissions of the tested vehicles in 2010 and in 2012/2013 over various driving cycles.

Figure 14 shows that the NO<sub>x</sub> emissions over the NEDC with cold start are almost in all cases compliant with the Euro 6 limit value (only vehicle E6 is slightly higher). During the CADC test the NO<sub>x</sub> emissions are often a lot higher than during the NEDC.

Especially vehicle J1 and J2 have extreme high NO<sub>x</sub> emissions in the CADC, the NO<sub>x</sub> emissions are 5,7 (J1) and 9,1 (J2) times higher than the Euro 6 limit value, these emissions are comparable to Euro 5 real world emissions. The NO<sub>x</sub> emissions during the WLTC are 2,6 and 3,1 times higher than the Euro 6 limit value. These vehicles have no after treatment to reduce NO<sub>x</sub> emissions but work with a lowered compression ratio in combination with EGR.

Vehicle E6 shows better results than vehicle J1 and J2 during both the WLTC as the CADC, the NO<sub>x</sub> emissions are approximately 2,2 times higher than the Euro 6 limit value. This vehicle has SCR aftertreatment.

Vehicle H4 and H6 show very good results on all cycles, only vehicle H4 exceeds the limit during the CADC, however, this is caused by a regeneration of the DPF. It is assumed that these vehicles use a LNT.

In general the 2010 models have better results than the 2012/2013 models.

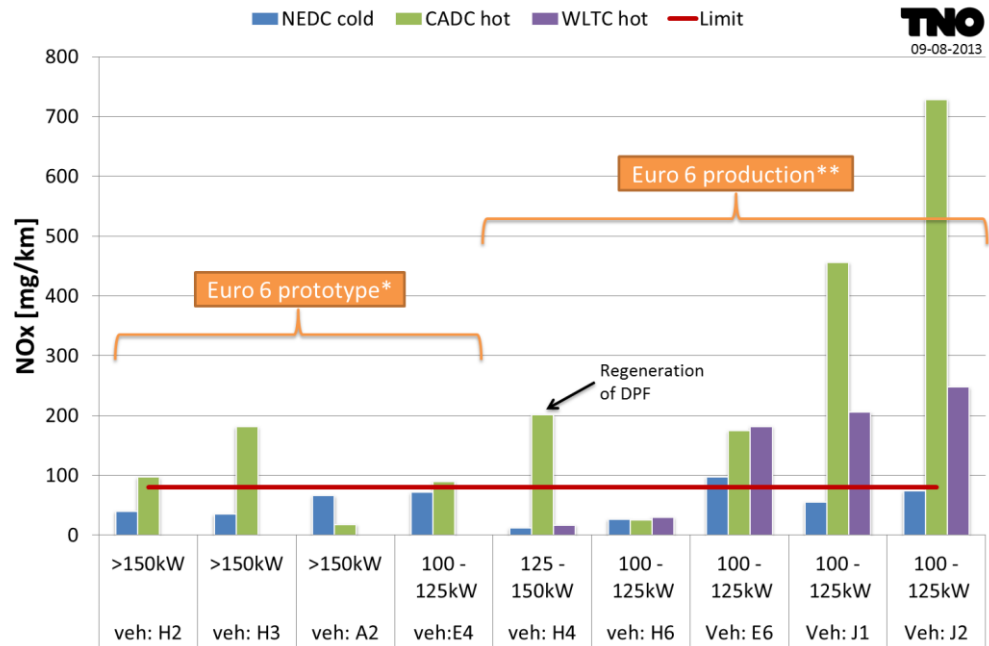


Figure 14: NO<sub>x</sub> emissions per driving cycle

Figure 15 and Figure 16 show the NO<sub>x</sub> emission results per phase during the NEDC and CADC. In the NEDC the NO<sub>x</sub> emissions are in all cases higher in the urban phase than in extra urban phase. In some cases also a NEDC with hot start is performed, it is interesting that vehicle E6, J1 and J2 have higher NO<sub>x</sub> emissions during the urban phase with hot start than during the urban phase with cold start. In the CADC this trend is not the same, the urban phase with cold and hot start differ mostly not very much.

Vehicle J1 and J2 show especially during the CADC motorway part extreme high emissions, vehicle J2 exceeds even the 1000 mg/km. Also in the urban en rural phase the emissions are not very good.

Vehicle E6 shows good results during the CADC motorway phase, the SCR system is working properly during the high speeds. The NO<sub>x</sub> emissions during the urban phase on the other hand are quit high with more than 400 mg/km.

Vehicle H4 and H6 show very good results on each part of the CADC cycle, only high emissions are shown during the motorway phase with vehicle H4 due to the regeneration of the DPF.

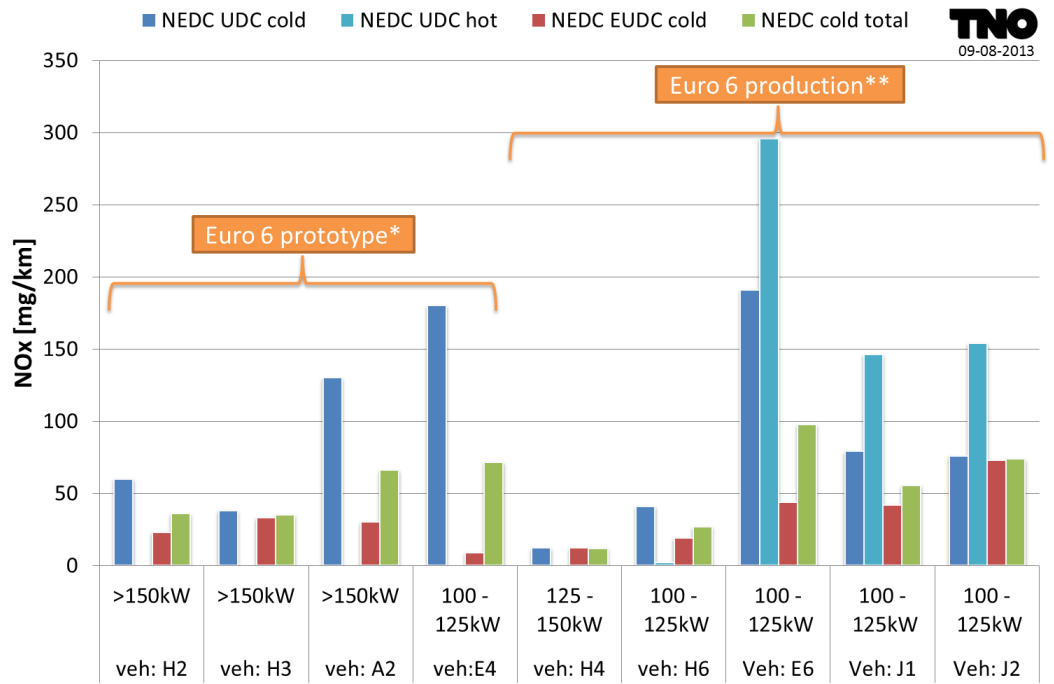


Figure 15: NO<sub>x</sub> emissions per phase in the NEDC

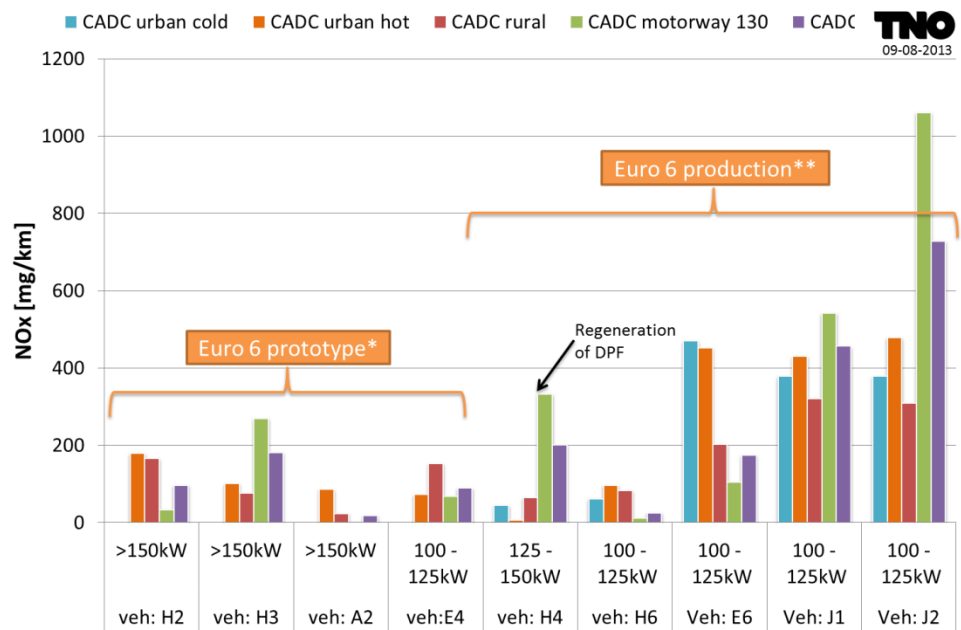


Figure 16: NO<sub>x</sub> emissions per phase in the CADC



5.1.2 PEMS test results

With vehicle E6 and J1 PEMS tests are performed. With vehicle E6 all tests were successfully performed. Vehicle J1 shows unusual high g/km emissions, further investigations and tests are needed. Emissions in mass (g/km) of vehicle J1 are therefore not reported in Figure 17 and Figure 18.

In Figure 17 and Figure 18 the NO<sub>x</sub> emissions of vehicle E6 and earlier tested Euro 5 vehicles are shown. Figure 17 shows the absolute (mg/km) emissions and Figure 18 shows the relative (%) emissions with respect to the limits.

Figure 17 shows that vehicle E6 is the best vehicle that TNO has tested, the NO<sub>x</sub> emissions are especially during high and constant speeds very low (around 80 mg/km) as a result of the SCR system, during urban driving the emissions are still quit high with ±600 mg/km, the same pattern was noticed during the CADC. In the reference trip the emissions are with 400 mg/km the lowest of all tested vehicles but it is still a lot higher than the Euro 6 limit.

Figure 18 shows that with respect to the limit the emissions of vehicle E6 are very high during the urban driving (± 8 times higher than the limit) and during the reference trip (± 5 times higher than the limit). At high and constant speeds the results are around the limit.

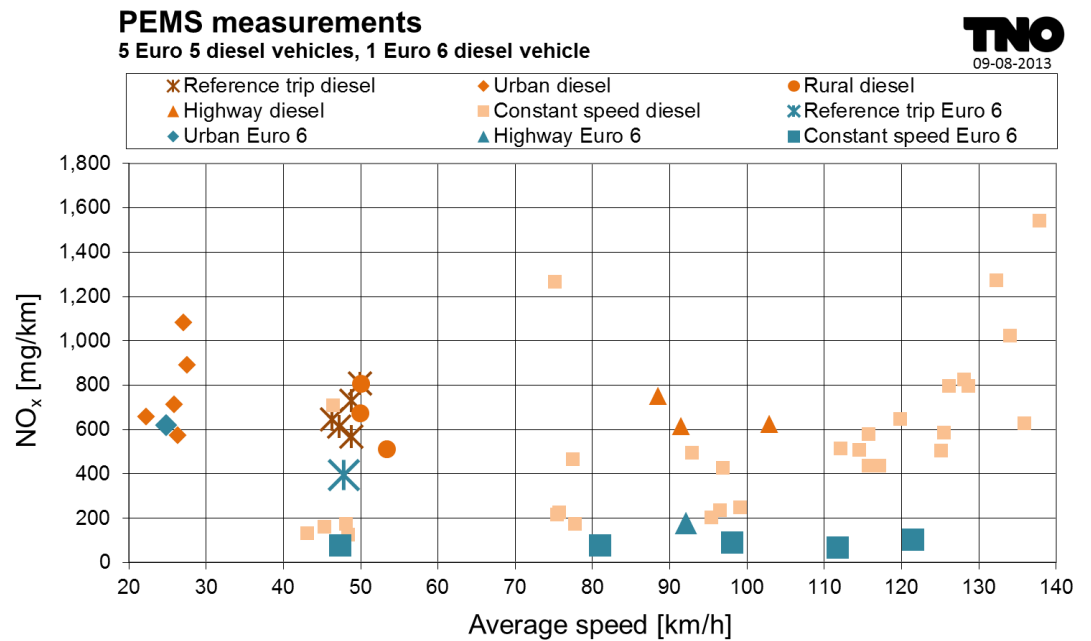


Figure 17: Absolute PEMS results for Euro 5 vehicles and vehicle E6

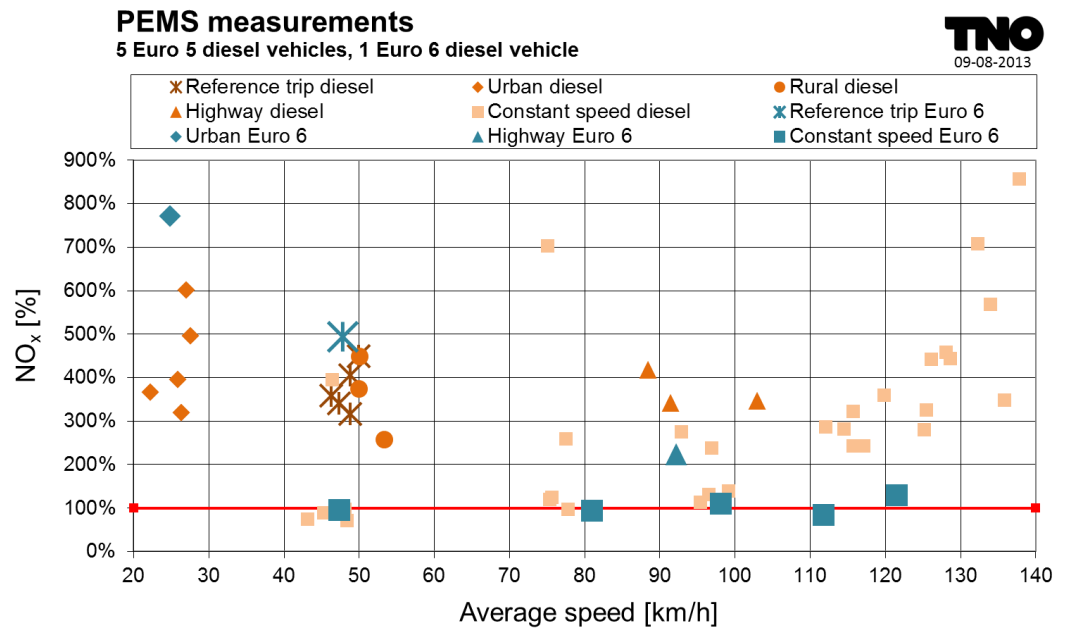
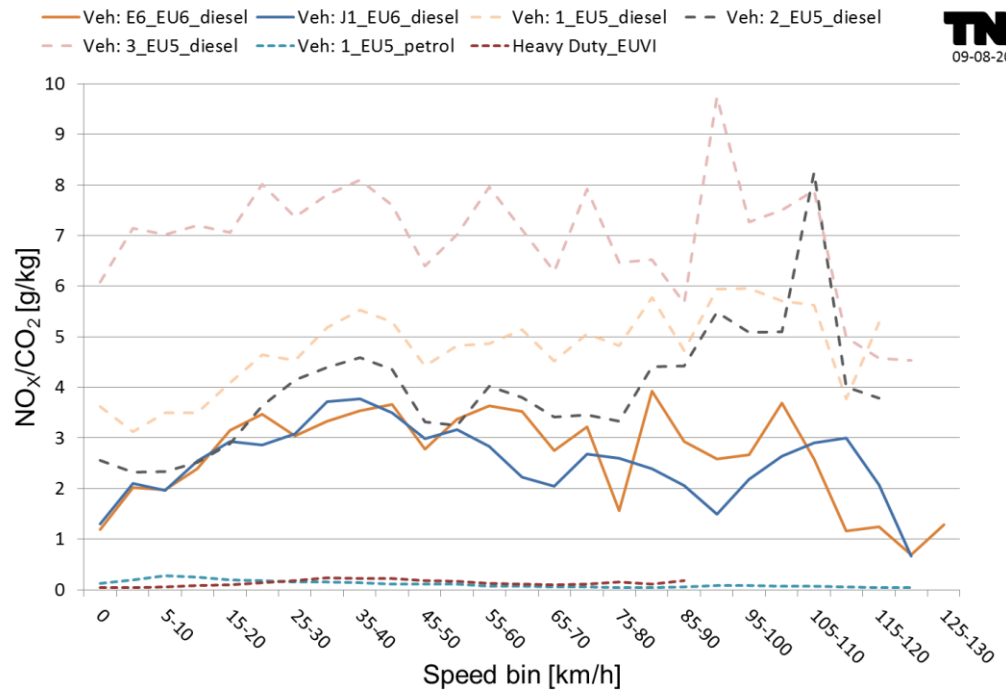


Figure 18: Relative PEMS results for Euro 5 vehicles and vehicle E6

NO<sub>x</sub> over CO<sub>2</sub> results

To assess heavy duty vehicles the NO<sub>x</sub> over CO<sub>2</sub> (g/kg) results are used by TNO to compare smaller and larger vehicles with each other. When the vehicle has a higher fuel consumption (CO<sub>2</sub> emission), it may emit more NO<sub>x</sub>. For light duty vehicles this is not an usual method yet, but TNO does use this method because now the results of the vehicle J1 can also be used.

Figure 19 shows that both the Euro 6 vehicles are better than all Euro 5 vehicles, but compared with a petrol (Euro 5) or heavy duty (Euro VI) vehicle the results are not very good.

Figure 19: PEMS results binned in NO<sub>x</sub> over CO<sub>2</sub>

## 5.2 TUG data and results

The HBEFA3.2 emission factors for Euro 6 passenger cars are compiled by the well-established approach using the TUG IVT emission model PHEM. In the HBEFA3.2 the emission standard Euro 6 will be differentiated between first generation of Euro 6 vehicles (referring to stage Euro 6a and Euro 6b, hereafter and specified as “Euro 6”) and vehicles which will enter the market based on more stringent emission regulation expected in 2017 (hereafter and specified as “Euro 6c”).

The following chapter describes the data sources and the results for the Beta-version of the HBEFA 3.2 emission factors. Adaptations for the final version may be done in October 2013.

### 5.2.1 Emission data available for Euro 6

The PHEM emission maps for Euro 6 have been generated based on instantaneous emission data available for five vehicles. For this sub-set of the Euro 6 sample the complete data necessary to set up engine emission maps was available (accurate instantaneous emission values and engine speed and engine power data). For the other vehicles measured in the ERMES group at the time of engine map elaboration only bag data was available.

Table 7: Available instantaneous emission data on Euro 6 diesel passenger cars

| Vehicle ID | Vehicle make and model   | Rated power [kW] | Lab             |
|------------|--------------------------|------------------|-----------------|
| D6_v01     | Prototype from US market | 180              | TUG/chassisdyno |
| D6_v02     | Prototype from US market | 180              | TUG/chassisdyno |
| D6_v03     | Serial production EU6    | 180              | TUG/chassisdyno |
| D6_v04     | Serial production EU6    | 110              | TUG/chassisdyno |
| D6_v05     | Serial production EU6    | 125              | TUG/PEMS        |

With this first set of engine emission maps for Euro 6 diesel cars emissions have been simulated for the CADC and for the ERMES cycle. The engine maps were then calibrated by the ratio of emission levels measured in the CADC on all Euro 6 diesel passenger cars available in the ERMES LDV bag database (Table 7) to the emission levels simulated. In this process the measured emission data also were weighted according to the shares of the used engine types in the available data on new registrations in 2012. For Euro 6 similar sales numbers than for the Euro 5 predecessors were assumed.

Here it has to be mentioned that the Euro 6 vehicles available until the end of the HBEFA3.2 measurement campaign mainly refer to the premium vehicle segment, which adds a certain uncertainty to the resulting fleet emission factors.

In addition uncertainties are related to:

- Shares of NO<sub>x</sub> control technologies in the future Euro 6 fleet.
- Level of exploitation of NO<sub>x</sub> reduction potential of these technologies in the future fleet (e.g. AdBlue may not be dosed at high engine loads by a yet unknown share of vehicle models if not relevant in the type approval test)

### 5.2.2 Assumptions for Euro 6c emission behaviour

For Euro 6c vehicle technology a real world emission level (in this context defined as 1/3 mix of CADC subcycles “urban”, “road” and “motorway”) has been defined with two times NEDC Euro 6 limits (2\*80mg = 160mg) due to a mandatory PEMS test in real drive operation and a emission conformity factor lower than 2. The emission factors for all other regulated pollutants as well the NO<sub>2</sub>/NO<sub>x</sub> ratio is assumed as identical similar to Euro 6 (first generation) technology.

In the calculation of the emission factors with the model PHEM furthermore the following details have been considered (details see full HBEFA report):

- Updated vehicle parameters (mass, rated power, etc.) to represent the fleet average Euro 6 vehicle from EU27 new car registrations
- Increased market penetration of start stop systems
- Influence of particle filter regeneration on average emission levels.

### Results

Figure 20 gives a comparison for NO<sub>x</sub> emissions simulated with the calibrated PHEM model for Euro 6 diesel passenger cars in the CADC sub-cycles. For comparison also results for Euro 0 to Euro 5 are plotted. Emission factors for the HBEFA are computed for different driving cycles and are reported in the HBEFA report 3.2. The CADC cycle gives a picture for a well-known test cycle but is assessed to lead to rather higher emission levels compared to “normal driving”.

The actual data suggests a clear NO<sub>x</sub> reduction under hot driving conditions due to Euro 6 which is more pronounced for urban driving conditions (~ -65%) than in rural (~-55%) and motorway conditions (~-45%).

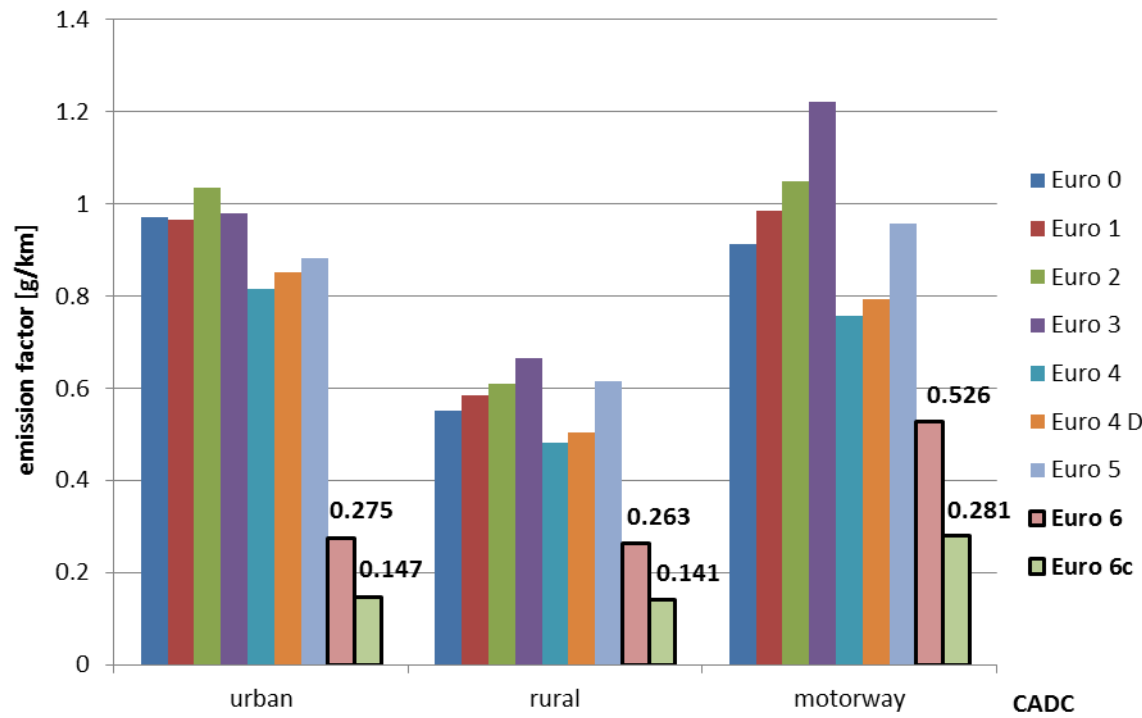


Figure 20: Emissions simulated with PHEM for diesel passenger cars in the CADC under hot start conditions

The NO<sub>2</sub>/NO<sub>x</sub> ratio found for Euro 6 diesel cars is 35 to 40%. Emission levels of PM, PN and CO is approximately similar to Euro 5. For HC a higher emission level compared to Euro 5 (ca. factor of 3) was calculated, but on very low absolute level compared with the emission limit.

## 6 Discussion

Both the introduction of Euro 4 and the introduction of Euro 5 followed the same trend. Petrol passenger cars yielding lower real world emission than the emission limits, and the diesel passenger cars, showing some initial reduction at the introduction, have eventually no substantial reduction of the NO<sub>x</sub> emissions. Again a new Euro-class is introduced: Euro 6. Some vehicles have low real-world emissions, however, not quite at the level of the emission limit of 80 mg/km. Other vehicles have emissions at the level of Euro 5, showing no significant improvement with the new limit.

There is hope of a reduced NO<sub>x</sub> emission of Euro 6 diesel passenger cars, however, at the same time the risk there will be no significant reduction. It is possible to optimize the emission control technology such that type-approval test will be below emission limit, and, at the same time, show no appropriate low emissions in other, real-world driving and vehicle usage. Eventually, Real-Driving Emission (RDE) part of later stages of Euro 6 legislation should solve the problem of incompatible results of the official test and other test results. In that case, expected in 2017, the NEDC test alone is no longer the single point of reference for emission control.

The current emission factors for Euro 6 are halfway between the test results and the expected emission risk. The risk manifests itself mainly on the motorway. It is possible that Euro 6 diesel passenger car NO<sub>x</sub> emissions are higher than the corresponding Euro 5 emissions. In urban and rural conditions it is expected that Euro 6 emission will remain below Euro 5 emissions, even in the worst case scenario. This is very likely due to the improved fuel efficiency in these conditions, and the closer resemblance of these conditions with the circumstances in the NEDC test.

Different technologies carry different risks. More advanced emission control technologies such as SCR and LNT will yield risk in technology specific circumstances, not directly related to driving behaviour but rather with the trip history, temperature, load variations, and low loads. The most common and important Euro 5 emission control technology is EGR. This technology is relatively inexpensive and likely to be implemented in common compact cars, which dominate the Dutch vehicle fleet. The associated risk with EGR is at high load. Hence, at the moment it is foreseen that in particular these compact cars on the motorway carry a large risk of high NO<sub>x</sub> emissions. It is already shown that EGR technology is capable of reaching Euro 6 emission limits on the NEDC.

The results are limited, as the number of available vehicle models is limited, and the analyses of the emissions is preliminary. Based on current results, emission modelling will have to undergo a transition from so-called "proportional models" associating emissions with power, velocity, and CO<sub>2</sub>, towards "risk modelling" identifying the emission control strategy and its associated risks. Only for EGR the traditional "proportional" approach will hold also for Euro 6. Despite these limitations, the statistical analysis underlying the approach combined with appropriate test cycles for real world driving still yields robust results for emission factors.

In Figure 21 the historical and current NOx emission factors of diesel passenger cars are shown. In urban traffic it is clear that diesel passenger cars perform better in time, their NOx emission factor is reduced from 1,06 to 0,24 g/km. However this is more than the Euro 6 Type Approval limit value of 0,08 g/km. The NOx emission factors on the motorway show a different trend, they have a constant level of 0,40 – 0,60 g/km (5-7 times the Type Approval limit value).

In time the NOx Type Approval limit values are more than 10 times reduced (from 0,90 to 0,08 g/km). However the emission factors on the motorway didn't decrease significantly and the urban emission factors only reduced 4 times (from 1,06 to 0,24 g/km). These numbers show clearly that the gap between Type Approval NOx emissions and real world NOx emissions increase; this gap is caused by selective use of NOx reduction systems which can be easily managed by advanced control systems of the vehicle. In the past emission factors and Type Approval limit values were at the same level, currently the emission factors are far higher than the Type Approval limit values.

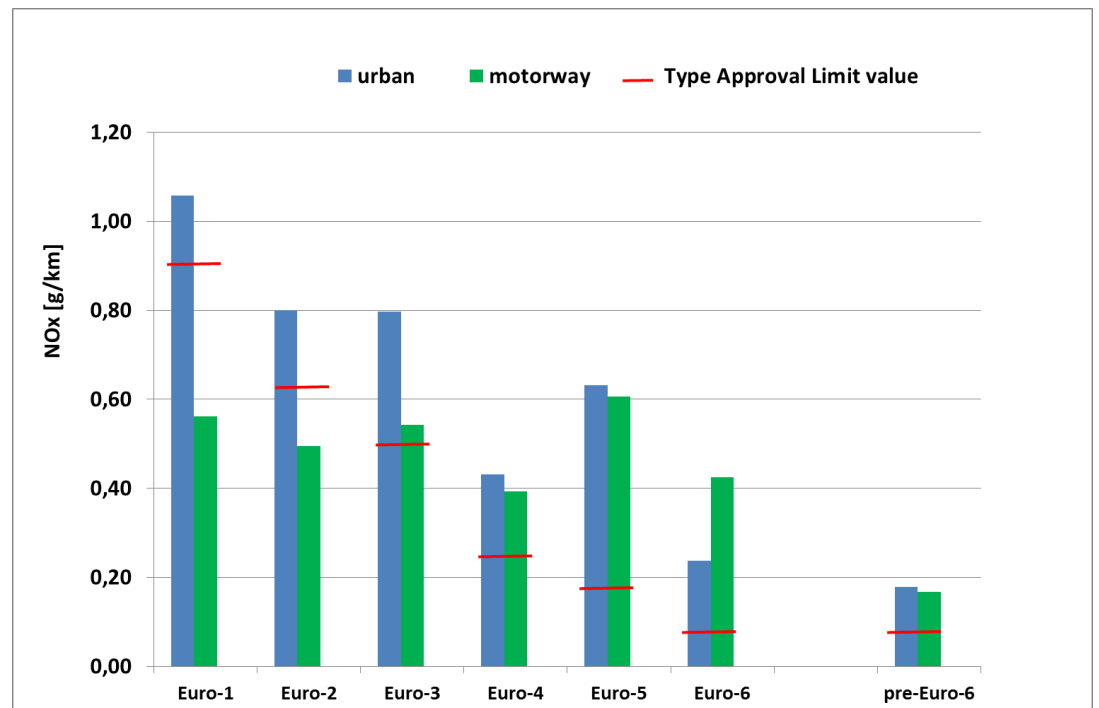


Figure 21: NOx emission factors and Type Approval limit values of diesel passenger cars

## 7 Conclusions

- The range of NO<sub>x</sub> emissions of Euro 6 diesel passenger cars in real-world tests is very large. In some cases the emissions are one-tenth of the emission limit value, in other cases tenfold the emission limit value.
- The results from TNO are confirmed by other tests and emission modelling in Europe. In particular the emission factors from TNO are in line with the preliminary results from TUG.
- Different emission reduction technologies exist, each with their own risk of high emissions. Some of these risks can already be quantified from the limited testing on the available models.
- It is not to be expected that the real-world NO<sub>x</sub> emissions of Euro 6 diesel passenger cars will be close to emission limit value of the NEDC test.
- The lower emission limit values from Euro 3 to Euro 4 and Euro 5 has not led to a decrease in real-world NO<sub>x</sub> emissions on diesel passenger cars. This experience over the last ten years gives little hope for Euro 6 in the absence of an improved test procedure, or real-driving emission legislation.
- It is likely that the simplest and cheapest emission control technology will be used in compact cars, which are the bulk of the Dutch sales. This signifies a risk of high NO<sub>x</sub> emissions similar to Euro 5, in particular on the motorway.



## 8 References

- [TNO 2006] Euro VI technologies and costs for Heavy Duty vehicles, The expert panels summary of stakeholders responses, Gense et. Al. 2006. 06.OR.PT.023.2/NG
- [TNO 2010] Verkennende metingen van schadelijke uitlaatgasemissies van personenvoertuigen met Euro 6 dieseltechnologie, Verbeek & Vonk, MON-RPT-2010-02278
- [ADAC 2011] Messungen an Euro 5- und Euro 6-Pkw im ADAC EcoTest
- [JRC 2012] Will Euro 6 reduce the NOx emissions of new diesel cars? e Insights from on-road - tests with Portable Emissions Measurement Systems (PEMS), Weiss et. Al.
- [TOI 2013] Utslipp fra kjoretoy med Euro 6/VI teknologi
- [AECC 2013a] SAE-paper 2013-24-0154, AECC, Exhaust Emissions from European Market-available Passenger Cars evaluated on various Drive Cycles
- [AECC 2013b] Emissions from Euro 3 to Euro 6 light-duty vehicles equipped with a range of emissions control technologies, J. May, C. Favre and D. Bosteels, Association for Emissions Control by Catalyst, Belgium

## 9 Signature

Delft, 5 December 2013

A handwritten signature in blue ink, appearing to be 'G. Kadijk', written in a cursive style.

Gerrit Kadijk  
Project Leader

A handwritten signature in blue ink, appearing to be 'N. Ligterink', written in a cursive style.

Norbert Ligterink  
Author

## A TNO chassis dynamometer test results

### Compliance with the Euro 6 limit value:

TNO tested vehicles in 2010 and in 2012/2013. The upcoming tables show the emission results over different driving cycles of the five tested vehicles in 2012 and 2013. The tested vehicles in 2010 were prototypes or were meant for the USA market, therefore these results are less relevant than the tests of 2012 and 2013.

The Table 8 up to Table 12 show that almost all vehicles are compliant with the Euro 6 limit value for each emission type during the NEDC with cold start. The following vehicles exceeding the limit:

- H4 exceeds the PN limit with almost 50%, the PN emissions in the other cycles are also relatively high, no technical defects were found.
- E6 exceeds the NO<sub>x</sub> limit with 22,5%, this is considered as marginal.
- J2 exceeds the CO limit with 32%, this is considered as marginal, in addition, in other tests the CO emissions are no issue, no technical defects were found.

Also during the cycles other than the NEDC with cold start the CO, PM and PN (except vehicle H4) emissions are all lower than the Euro 6 limit value. THC + NO<sub>x</sub> emissions are often higher than the limit value, this is caused by the high NO<sub>x</sub> emissions, THC emissions are not an issue. The high NO<sub>x</sub> emissions are discussed in the next paragraph.

The CO<sub>2</sub> emissions during the NEDC with cold start are in all cases higher than during the type approval test, the deviation varies between the 3 and 17%. This deviation is considered as a problem but it is not further addressed in this report as it is not a 'pollutant' emission.

Table 8: Results vehicle H4

| Emissions vehicle <b>H4</b> | Unit       | Limit (Euro 6) | NEDC cold | NEDC hot | CADC cold** | CADC hot | WLTC cold | WLTC hot |
|-----------------------------|------------|----------------|-----------|----------|-------------|----------|-----------|----------|
| CO                          | [mg/km]    | 500            | 36        | x        | 268         | 269      | 131       | 122      |
| CO2                         | [g/km]     | 124*           | 128       | x        | 150         | 149      | 135       | 131      |
| NOx                         | [mg/km]    | 80             | 12        | x        | 205         | 201      | 31        | 17       |
| THC+NOx                     | [mg/km]    | 170            | 35        | x        | 272         | 273      | 107       | 94       |
| PM                          | [mg/km]    | 4.5            | 0.4       | x        | 2.2         | 2.2      | 0.1       | 0.2      |
| PN                          | [-/km]     | 6.0E+11        | 8.9E+11   | x        | 2.6E+12     | 2.8E+12  | 2.3E+11   | 3.8E+10  |
| Fuel consumption            | [l/100 km] | 4.7*           | 4.76      | x        | 5.61        | 5.58     | 5.05      | 4.89     |

\*Type approval value

\*\*Regeneration of DPF

Table 9: Results vehicle H6

| Emissions vehicle <b>H6</b> | Unit       | Limit (Euro 6) | NEDC cold | NEDC hot | CADC cold | CADC hot | WLTC cold | WLTC hot |
|-----------------------------|------------|----------------|-----------|----------|-----------|----------|-----------|----------|
| CO                          | [mg/km]    | 500            | 88        | 62       | 82        | 83       | x         | 43       |
| CO2                         | [g/km]     | 109*           | 112       | 108      | 119       | 118      | x         | 110      |
| NOx                         | [mg/km]    | 80             | 27        | 16       | 28        | 26       | x         | 25       |
| THC+NOx                     | [mg/km]    | 170            | 53        | 54       | 77        | 76       | x         | 77       |
| PM                          | [mg/km]    | 4.5            | 0.0       | 0.1      | 0.1       | 0.1      | x         | 0.0      |
| PN                          | [-/km]     | 6.0E+11        | 2.6E+09   | 4.E+10   | 4.8E+09   | 4.1E+09  | x         | 1.6E+10  |
| Fuel consumption            | [l/100 km] | 4,1*           | 4.18      | 4.03     | 4.46      | 4.40     | x         | 4.11     |

\*Type approval value

Table 10: Results vehicle E6

| Emissions vehicle <b>E6</b> | Unit       | Limit (Euro 6) | NEDC cold | NEDC hot | CADC cold | CADC hot | WLT C cold | WLTC hot |
|-----------------------------|------------|----------------|-----------|----------|-----------|----------|------------|----------|
| CO                          | [mg/km]    | 500            | 124       | 4        | 5         | 2        | x          | 3        |
| CO2                         | [g/km]     | 127*           | 149       | 131      | 142       | 140      | x          | 129      |
| NOx                         | [mg/km]    | 80             | 98        | 201      | 177       | 175      | x          | 182      |
| THC+NOx                     | [mg/km]    | 170            | 135       | 206      | 180       | 176      | x          | 183      |
| PM                          | [mg/km]    | 4.5            | 0.1       | 0.0      | 0.6       | 0.6      | x          | 0.0      |
| PN                          | [-/km]     | 6.0E+11        | 2.9E+09   | 2.E+08   | 2.8E+09   | 1.9E+09  | x          | 4.4E+08  |
| Fuel consumption            | [l/100 km] | 4.9*           | 5.57      | 4.88     | 5.31      | 5.22     | x          | 5.00     |

\*Type approval value

Table 11: Results vehicle J1

| Emissions vehicle <b>J1</b> | Unit       | Limit (Euro 6) | NEDC cold | NEDC hot | CADC cold | CADC hot | WLT C cold | WLTC hot |
|-----------------------------|------------|----------------|-----------|----------|-----------|----------|------------|----------|
| CO                          | [mg/km]    | 500            | 372       | 6        | 57        | 20       | x          | 5        |
| CO2                         | [g/km]     | 119*           | 127       | 112      | 151       | 149      | x          | 119      |
| NOx                         | [mg/km]    | 80             | 55        | 85       | 447       | 456      | x          | 205      |
| THC+NOx                     | [mg/km]    | 170            | 100       | 99       | 473       | 477      | x          | 214      |
| PM                          | [mg/km]    | 4.5            | 0.2       | 0.0      | 0.1       | 0.1      | x          | 0.1      |
| PN                          | [-#/km]    | 6.0E+11        | 4.7E+11   | 3.E+09   | 5.5E+07   | 3.1E+07  | x          | 4.3E+06  |
| Fuel consumption            | [l/100 km] | 4.60*          | 4.76      | 4.17     | 5.62      | 5.54     | x          | 4.45     |

\*Type approval value

Table 12: Results Vehicle J2

| Emissions vehicle <u>J2</u> | Unit       | Limit (Euro 6) | NEDC cold | NEDC hot | CADC cold | CADC hot | WLTC cold | WLTC hot |
|-----------------------------|------------|----------------|-----------|----------|-----------|----------|-----------|----------|
| CO                          | [mg/km]    | 500            | 661       | 8        | 47        | 7        | 90        | 20       |
| CO2                         | [g/km]     | 119*           | 127       | 112      | 151       | 150      | 125       | 119      |
| NOx                         | [mg/km]    | 80             | 74        | 93       | 716       | 729      | 198       | 247      |
| THC+NOx                     | [mg/km]    | 170            | 148       | 113      | 737       | 745      | 217       | 275      |
| PM                          | [mg/km]    | 4.5            | 0.1       | 0.3      | 0.3       | 0.3      | 0.2       | 0.1      |
| PN                          | [/km]      | 6.0E+11        | 8.1E+10   | 6.E+09   | 9.7E+07   | 3.1E+07  | 5.2E+09   | 5.3E+06  |
| Fuel consumption            | [l/100 km] | 4.60*          | 4.80      | 4.17     | 5.64      | 5.58     | 4.67      | 4.45     |

\*Type approval value

## B Determination of emission factors

The national emission factors are the representative emission per kilometre for different vehicle categories, and different road types and congestion levels. They are derived from emission measurements, and scaled and weighed to the representative situation. Current data on Euro 6 diesel vehicles will not be representative for the Euro 6 vehicle fleet in 2015 or later. The number of makes and models are very limited. Hence current emission factors for Euro 6 diesel vehicles are preliminary and they will be adjusted to the future sales distribution of different technologies.

A second restriction, apart from the representativeness of the current Euro 6 vehicles for the future fleet, is the performance of the emission reduction technology in real-world circumstances. There is a clear discrepancy between the emissions in the laboratory and the emissions during the on-road tests, for some vehicles. So far, the influences of all on-road conditions are not fully understood. For example, road surface, precipitation, temperature, additional weight, steering, and wind all affect the engine load and emissions. Only in part these are characterized during the trip. However, correcting them to a standard effect for the Dutch situation is only in its preliminary stages and it will require much more research.

The third restriction to be placed on current results is the apparent “incidental emissions”. With limited emission control the  $\text{NO}_x$  and, in a lesser extent, CO are proportional to the fuel consumption and  $\text{CO}_2$  emission. Traditionally, the limited HC emissions only occurred at sudden drops in the engine loads, e.g., braking, and high loads, e.g. long periods of accelerations. With the introduction of advanced emission control, such as LNT for Euro 6,  $\text{NO}_x$  emissions occur in batches. A repetition of the same test will not yield the same emission result as an emission burst or batch may not occur. A proper functioning LNT will yield such batches but with very little  $\text{NO}_x$  emission. See Figure 22.

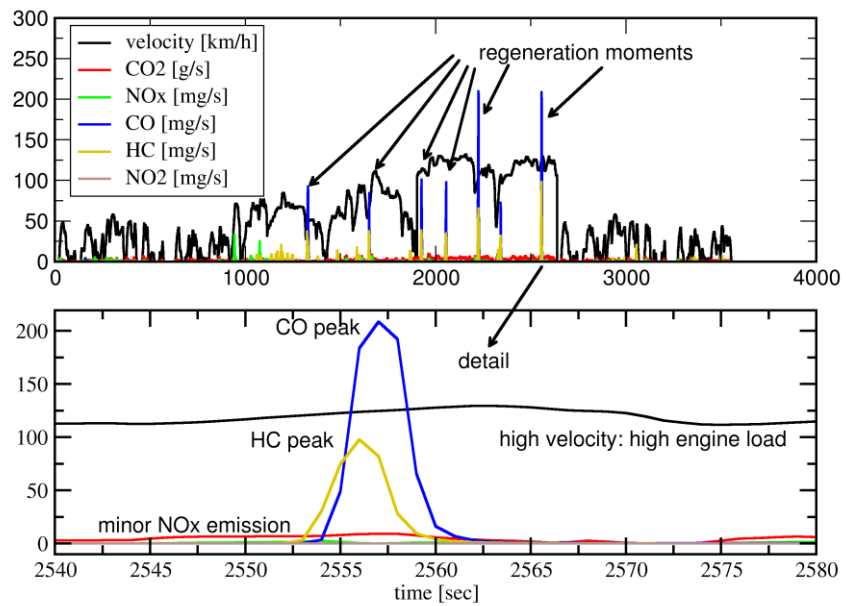


Figure 22: Typical regeneration moments at high velocities. A peak of CO and HC with limited  $\text{NO}_x$  emissions.

The LNT  $\text{NO}_x$  emission control is not always as successful as show in Figure 22. Another case under similar circumstances, i.e., motorway driving shows a succession of regenerations which keeps the average  $\text{NO}_x$  emission around 0.5 g/km. See Figure 23.

The normal regeneration of the LNT is not a problem for the emissions. However, with different vehicles with LNT and several hours of test data, higher emissions occasionally occur. In some case the LNT fails to regenerate altogether yielding, eventually high engine-out values for the  $\text{NO}_x$  emissions. See Figure 24.



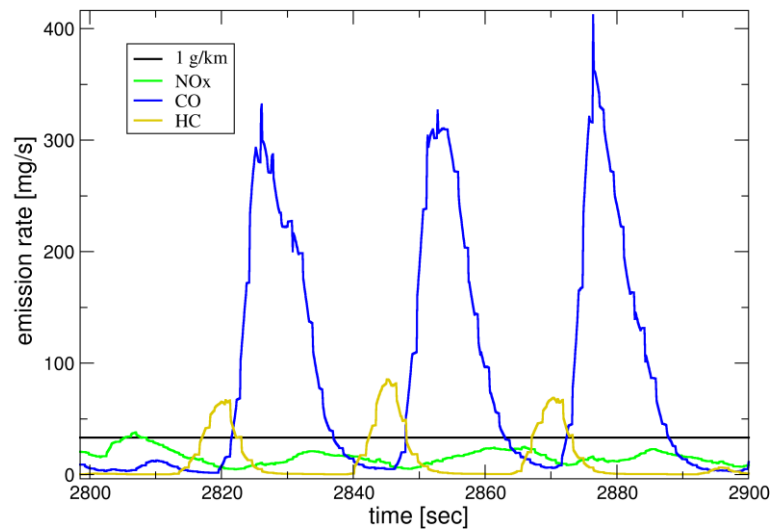


Figure 23: LNT emission control during motorway driving yielding a fast succession of regenerations with still substantial NO<sub>x</sub> emissions.

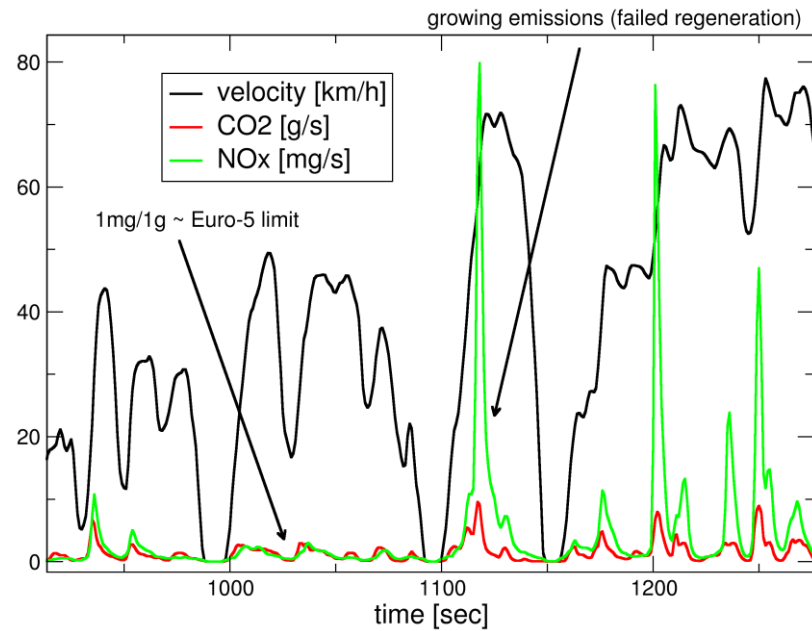


Figure 24 During rural driving NO<sub>x</sub> emissions may grow occasionally due the delayed or failed regeneration of the trap.

More traditional technology, such as EGR, yield not only higher emissions but also more constant emissions. The emissions is expected to grow with the CO<sub>2</sub> emission.

In principle there are three types of failures of NO<sub>x</sub> emission control: SCR fails if the exhaust-gas temperature is too low, which is at the start and in urban driving with a lot of idling. The LNT fails when engine out emissions increase without the possibility to regenerate. This seems most common in high dynamic rural driving. The last technology EGR has the highest NO<sub>x</sub> emissions at high load. High load typically corresponds with motorway driving. In the last case the NO<sub>x</sub> emissions increases by all standards: g/km, g/hr, and g/kg CO<sub>2</sub>. Depending on the technology, the derived emission factors follow a certain pattern. LNT can achieve very low NO<sub>x</sub> emission factors on the motorway, compared with urban and rural emissions. The same holds for SCR.

Given the variations of the result with technology and with tests the emission factors are determined from the average of the real-world chassis dynamometer tests. The results are given in Table 13.

Table 13: Emission factors for Euro 6 based on the average of the tests

| [mg/km]  | emission factors | NOx     | CO  | HC | NO2 |
|----------|------------------|---------|-----|----|-----|
|          |                  | [mg/km] |     |    |     |
| urban    | Congested        | 234     | 79  | 54 | 47  |
|          | Normal           | 147     | 46  | 32 | 29  |
|          | free-flow        | 163     | 60  | 38 | 30  |
| rural    | Normal           | 128     | 57  | 30 | 22  |
| motorway | Average          | 164     | 104 | 33 | 41  |
|          | Congested        | 199     | 73  | 42 | 45  |
|          | 80 km/h          | 104     | 86  | 33 | 26  |
|          | 100 km/h control | 137     | 97  | 29 | 35  |
|          | 100 km/h         | 150     | 100 | 31 | 37  |
|          | 120 km/h         | 189     | 110 | 36 | 43  |
|          | 130 km/h         | 215     | 116 | 38 | 47  |

The current emission factors are only a first estimate based on the test results. There is a substantial risk the emission will be much higher. Both the spread, i.e. standard deviation, of the results as the difference between maximal value and the mean are an indication for the values that may occur. We define risk as the average of the standard deviation and the maximal value:

$$\text{Risk [\%]} = \frac{1}{2} (\text{stdev[\%]} + \text{maximal deviation [\%]})$$

Using the highest value only for the risk will be overly conservative, with very worst case assumptions. Using the standard deviation only will yield a result dominated by the make-up of the current test program, i.e., the availability and selection of vehicles. Combining both worst case assumptions yield a robust result incorporating both the spread and the extremes.

We find the risk for urban and rural emission to be around 120% extra emissions, for motorway the risk is much higher: the additional emissions are around 300%, yielding up to 0.72 g/km NO<sub>x</sub> emissions are possible for Euro 6 diesel vehicles.

Table 14: The estimate of the worst case emission factors for Euro 6 based on the spread in the results per test.

| [mg/km]  | emission risk    | NO <sub>x</sub> | NO <sub>2</sub> |
|----------|------------------|-----------------|-----------------|
| urban    | Congested        | 523             | 190             |
|          | Normal           | 326             | 114             |
|          | free-flow        | 342             | 108             |
| rural    | Normal           | 275             | 83              |
| motorway | Average          | 686             | 218             |
|          | Congested        | 554             | 219             |
|          | 80 km/h          | 416             | 126             |
|          | 100 km/h control | 637             | 209             |
|          | 100 km/h         | 639             | 209             |
|          | 120 km/h         | 684             | 220             |
|          | 130 km/h         | 720             | 229             |

These worst case emission factors are confirmed by the PEMS results. There are only two vehicles tested, but the average emission factors from these two Euro 6 cars yields emission factors close to the current Euro 5 emission factors. Furthermore, the emissions on-road of one vehicle are apparently larger than under similar circumstances on the chassis dynamometer in the laboratory.

The initial estimates of the emission factors, must be conservative, as the underlying data is limited. The estimate is based on the following analysis of emission factors based on the individual tests:

$$EF_{\text{estimate}} = EF_{\text{average}} + 0.25 \cdot \text{STDEV} + 0.25 \cdot (EF_{\text{max}} - EF_{\text{average}})$$

The experience from Euro 5 would lead to worst case emission factors, as there no discernible overall reduction from Euro 4 to Euro 5. The worst case emission factors follow the same trend from Euro 4 onwards. On the other hand, the lowest emissions, on the official, NEDC tests and also in real-world tests (CADC, WLTC), have gone down. Also with Euro 5 there was only one vehicle which performed in real-world tests comparable with the emission limit. With Euro 6 more brands and models show emissions which follow, in part, the trend of the emission limits. Hence, for the 2014 Dutch national emission factors a conservative estimate will be slightly lower than the worst-case risk. The emission factors are therefore set halfway between the average results and the risk results. The emission factors are given in Table 15. As can be seen the motorway emission factors are much higher above the average emission factors, due to the high risk associated with EGR technology, which is less likely to function in real-world conditions.

The emission factors are in line with the preliminary results of TUG for HBEFA 3.2. The reduction from Euro 5 to Euro 6 is slightly smaller in the proposed TNO emission factors than in the HBEFA emission factors. The difference is explained by three main differences between Dutch emission factors and HBEFA emission

factors. First, the driving behaviour is different. In the Netherlands the congestion is typically high and speed limits on the motorway are strict. Second, the compact, fuel-efficient cars dominate the sales in The Netherlands. The Dutch diesel passenger car fleet is different from other European countries. Third, particular choices in testing and modelling are different from other approaches. The Dutch emission factors are part of the calibrated air-quality model. The approach is kept as much the same as possible to allow for historical comparison, retain the calibration, and allow for trend analyses.

Table 15: Euro 6 diesel emission factors, proposed for the 2014 Dutch national air-quality model.

| [mg/km]  | emission estimate | NO <sub>x</sub> | NO <sub>2</sub> |
|----------|-------------------|-----------------|-----------------|
| urban    | congested         | 379             | 119             |
|          | Normal            | 237             | 71              |
|          | free-flow         | 252             | 69              |
| rural    | Normal            | 202             | 53              |
| motorway | Average           | 425             | 129             |
|          | congested         | 377             | 132             |
|          | 80 km/h           | 260             | 76              |
|          | 100 km/h control  | 387             | 122             |
|          | 100 km/h          | 394             | 123             |
|          | 120 km/h          | 437             | 131             |
|          | 130 km/h          | 468             | 138             |

The current emission factors are in line with the common strategy to estimate emission factors based on the ratio between emission limits and measurement data from earlier Euro-classes. In this case Euro 5. The reduction of the NO<sub>x</sub> emission limits from Euro 5 to Euro 6 is from 180 mg/km to 80 mg/km. Applying the same reduction on the Euro 5 emission factors, for which more than sufficient evidence exists yields extrapolated Euro 6 emission factors which are slightly higher (up to 25%) than the current factors in the urban situations, and lower (down 40%) in the case of motorway driving:

Table 16: The Euro 6 emission factors based on the reduction of real-world emissions proportional to the reduction of the emission limit

| [mg/km]  | Euro 5 extrapolation | NO <sub>x</sub> | NO <sub>2</sub> |
|----------|----------------------|-----------------|-----------------|
| urban    | congested            | 476             | 148             |
|          | normal               | 281             | 86              |
|          | free-flow            | 257             | 77              |
| rural    | normal               | 153             | 45              |
| motorway | average              | 269             | 87              |
|          | congested            | 447             | 149             |
|          | 80 km/h              | 186             | 61              |
|          | 100 km/h control     | 228             | 74              |
|          | 100 km/h             | 234             | 75              |
|          | 120 km/h             | 258             | 80              |
|          | 130 km/h             | 272             | 83              |

The overview of the tables is shown in Figure 25. The larger the spread in the data the larger the risk. The actual emission factors are set halfway between the risk and the average value.

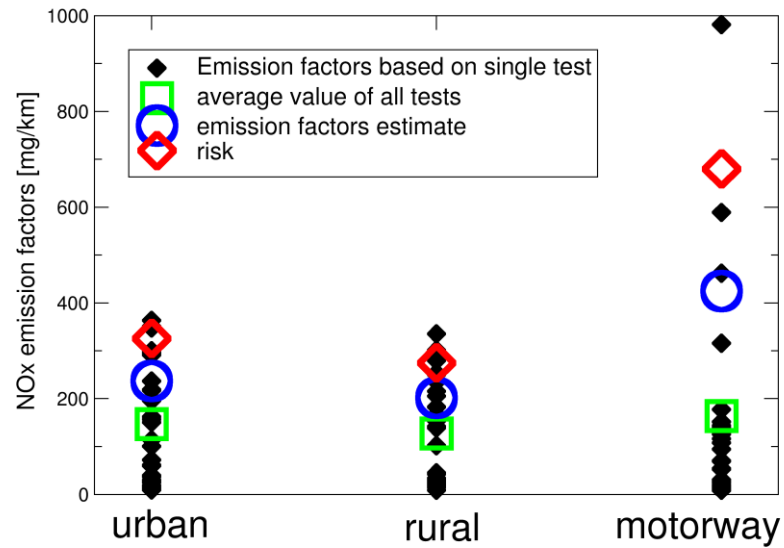


Figure 25: visualization of the emission factors in the different tables. The spread in motorway emission is large, yielding a substantial risk for high emissions, comparable to Euro 5.