



(11) **EP 2 062 978 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
27.05.2009 Bulletin 2009/22

(51) Int Cl.:
C12Q 1/04 (2006.01)

(21) Application number: **07121431.6**

(22) Date of filing: **23.11.2007**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE
SI SK TR**
Designated Extension States:
AL BA HR MK RS

(71) Applicant: **Nederlandse Organisatie voor
Toegepast-
Natuurwetenschappelijk Onderzoek TNO
2628 VK Delft (NL)**

(72) Inventors:
• **Gerritse, Jan
7331 HN Apeldoorn (NL)**
• **van Groenestijn, Johannes Wouterus
7325 VH Apeldoorn (NL)**
• **Zegers, Neeltje Dina
2623 CW Delft (NL)**

(74) Representative: **Hatzmann, Martin
Vereenigde
Johan de Wittlaan 7
2517 JR Den Haag (NL)**

(54) **System for detecting microbial contamination**

(57) The present invention relates to a system for detecting microbial contamination of a liquid specimen comprising a device for concentrating micro-organisms from a liquid specimen, having (i) a hypobaric chamber, (ii) a filter housing comprising a liquid-permeable bed of an adsorbent material and adapted for being fluidly connected to said hypobaric chamber, and (iii) a vacuum

pump adapted for being fluidly connected to said hypobaric chamber, said system further comprising a kit for detection of micro-organisms adsorbed to said adsorbent material, wherein said kit is based on enzymatic detection using chromogenic and/or fluorescent substrate analogs.

EP 2 062 978 A1

Description

FIELD OF THE INVENTION

[0001] The present invention is in the field of rapid detection of microbial contamination. In particular, the present invention relates to a system for rapid detection of microbial contamination in fluid samples, in particular microbial contamination originating from faeces. A system of the invention comprises a device for concentrating bacteria from a fluid sample as part of a kit for detecting microbial contamination and a method for detecting microbial contamination in water specimens using the inventive device.

BACKGROUND OF THE INVENTION

[0002] In developing countries many millions of people fall victim to waterborne diseases each year. Yearly about 250 million new cases of waterborne infections are reported world-wide, resulting in 1.8 million fatalities ensuing from diarrhoeal diseases, of which 90% are children under the age of 5. In India alone, yearly 320 thousand children die from diarrhoea. Almost invariably this is due to a lack of reliable and cost-effective water production technology, sanitation and hygiene, resulting in unsafe water or water of poor bacteriological quality. Moreover, there is a lack of systems for assessing the bacteriological quality of water. Use of safe drinking water can reduce diarrhoeal morbidity by between 6 to 25%. If water is unsafe, it can be treated. In fact, chlorination at point of use can decrease diarrhoea by 35 to 39%. Therefore, there is a need for systems for assessing the bacteriological quality of water at the point of use, to determine whether treatment is necessary.

[0003] The most common cause of waterborne disease is faecal contamination. Most often, drinking water is contaminated with animal and human excrement. Faecal contamination of drinking water is usually not noticed due to lack of affordable diagnostic methods. In order to detect faecal contamination use can be made of so-called indicator organisms. An indicator organism to detect faecal contamination: i) is universally present in large numbers in the faeces of humans and warm-blooded animals; ii) readily detected by simple methods; iii) exhibits no growth in natural waters; and iv) persists in water and can be removed by water treatment similar to waterborne pathogens. A very suitable faecal indicator organism, and the one designated by the World Health Organization (WHO) for that purpose, is *Escherichia coli*. More precisely, an indication of faecal contamination can be obtained by the determination of the number per 100 ml of water of coliforms (facultatively-anaerobic, rod-shaped, Gram-negative, non-sporulating bacteria that ferment lactose; including for instance species of the genera *Escherichia*, *Enterobacter*, *Kebsiella* and *Citrobacter*) and especially the thermotolerant coliform *Escherichia coli*.

[0004] With respect to the test system for detecting

Escherichia coli, the WHO has introduced the acronym ASSURED to describe the ideal properties and criteria of a diagnostic test which stands for: Affordable (for those at risk of infection); Sensitive (few false negatives); Specific (few false positives); User-friendly (simple to perform and requiring minimal training); Rapid (to enable treatment at first visit) and robust (does not require refrigerated storage); Equipment-free; and Deliverable to developing countries. Numerous methods have been used for the detection of coliforms and *E. coli* in water. These detection methods can be based on for instance cultivation, enzyme reaction, and immunological or genetic detection. Currently there are more than 30 alternative assays commercially available to detect coliforms and *E. coli*. Most of these tests do not comply with the ASSURED criteria for speed and sensitivity, or for not being equipment free. In fact, most require a dedicated laboratory in order to meet the most essential test criteria for being sensitive and specific. It should be understood, however, that a rapid field test for faecal contamination that is less sensitive than the laboratory tests may result in a significant reduction of sick people and save lives. Thus, a sensitive laboratory test is not always more useful than a less-sensitive, but rapid and specific field test that does the job, i.e. that tells the user that the water is unsafe to drink.

[0005] Thus, there is a need for a simple, cheap, robust and fast test method for on site detection of faecal contamination in water. Such a method will be used more frequently, at more places by more people and can warn people earlier, and as a consequence, save lives.

SUMMARY OF THE INVENTION

[0006] The present inventors have now discovered that a diagnostic test system can be developed that is capable of detecting coliforms and *E. coli* and that is simple, cheap, robust and fast and suitable for on site detection of faecal contamination of water specimens. The diagnostic test system combines solid phase adsorption of microbial cells with specific growth and enzymatic detection of adsorbed cells.

[0007] In a first aspect, the present invention provides a device for concentrating micro-organisms from a liquid specimen, comprising:

(i) a filter housing comprising:

- a) a liquid inlet through which said liquid specimen can enter the filter housing and adapted for engaging with said liquid specimen,
- b) a liquid outlet through which said liquid specimen can leave the filter housing and adapted for sealably engaging with a hypobaric chamber, and
- c) a liquid-permeable bed of an adsorbent material housed in the filter housing between said liquid inlet and liquid outlet and capable of ad-

sorbing micro-organisms, whereby when a pressure differential is applied across the filter housing the liquid specimen is drawn into the filter housing via the liquid inlet and passes through said liquid-permeable bed of an adsorbent material before leaving via said liquid outlet;

- ii) a hypobaric chamber having a liquid inlet adapted for sealably engaging with the liquid outlet of said filter housing and further having an air outlet for evacuating air from said hypobaric chamber; and
- iii) a vacuum pump adapted for sealably engaging with the air outlet of said hypobaric chamber.

[0008] In a preferred embodiment of a device of the invention the filter housing is essentially cylindrical and translucent at the position of the bed of an adsorbent material, and wherein said housing preferably has an inner volume of between 1 and 10 ml.

[0009] In another preferred embodiment of a device of the invention the adsorbent material has a positively charged surface and is selected from the group consisting of insoluble metal hydroxides, lectins on a support material, carbodiimides on a support material, cationic polymers on a support material, anion exchange resins, and positively charged electrodes.

[0010] In the instance that the adsorbent material is based on cationic polymers, such polymers are preferably selected from poly-L-lysine, polyethyleneimine and combinations thereof.

[0011] In the instance that the adsorbent material is based on insoluble metal hydroxides, such insoluble metal hydroxides are preferably selected from hydroxyapatite, zirconium hydroxide, titanium hydroxide and hafnium hydroxide. In a most preferred embodiment the adsorbent material is hydroxyapatite.

[0012] The liquid from a specimen of which the micro-organisms are concentrated using the device of the instant invention is preferably water, most preferably drinking water.

[0013] The vacuum pump is preferably a hand vacuum pump.

[0014] In another aspect, the present invention provides a system for detecting micro-organisms in a liquid specimen, comprising:

- i) a device for concentrating micro-organisms from a liquid specimen according to the invention as described above;
- ii) a kit for the detection of said micro-organisms by detecting enzymatic activity specific for said micro-organism comprising a chromogenic and/or fluorogenic substrate and a liquid growth medium, said substrate preferably being in the form of a supplement for said growth medium; and optionally
- iii) instructions for assembling, operating and disassembling the device, and/or detecting micro-organisms concentrated in said device by using said de-

tection kit.

[0015] In a preferred embodiment of a system of the present invention, the kit is for the detection of coliforms and/or *E. coli* by detecting enzymatic activity of β -D-galactosidase and/or β -D-glucuronidase, respectively.

[0016] Suitable chromogenic or fluorogenic substrate for detection of β -D-glucuronidase and/or β -D-galactosidase activity include, but are not limited to 4-methylumbelliferyl- β -D-glucuronide (MUG); *ortho*-nitrophenyl β -D-glucuronide (ONPG); *para*-nitrophenyl β -D-glucuronide (PNPG); β -naphthalamide- β -D-glucuronide; 6-bromo-2-naphthyl β -D-glucuronide; 5-bromo-4-chloro-3-indolyl β -D-glucuronide (BCIG or X-glucuronide); α -naphthol- β -D-glucuronide; 4-methylumbelliferyl- β -D-galactopyranoside (MUGal), *ortho*-nitrophenyl- β -D-galactopyranoside (ONPGal); *para*-nitrophenyl- β -D-galactopyranoside (PNPGal); 6-chloro-3-indolyl- β -D-galactopyranoside (Salmon-Gal), 5-bromo-4-chloro-3-indolyl β -D-galactopyranoside (X-Gal); 4-nitrophenyl 1-thio- β -D-galactopyranoside (NPSGal), 6-bromo-2-naphthyl- β -D-galactopyranoside; 3,4-dinitrophenyl β -D-galactopyranoside (DNPGal), functional derivatives, and combinations thereof.

[0017] Preferably, the liquid growth medium comprises allolactose, isopropyl- β -D-thiogalactopyranoside (IPTG) and/or lactose, in order to induce the enzymes of which the activity is to be detected (i.e. β -D-glucuronidase and/or β -D-galactosidase).

[0018] In yet another aspect, the present invention provides a method for detecting micro-organisms in a liquid specimen, said method comprising the steps of:

- a) engaging a liquid inlet of a filter housing with a liquid specimen, wherein said filter housing has a liquid outlet and houses a liquid-permeable bed of an adsorbent material in between said liquid inlet and said liquid outlet, wherein said adsorbent material is capable of adsorbing micro-organisms;
- b) placing the liquid outlet of said filter housing in fluid communication with a liquid inlet of a hypobaric chamber, by means of a sealed passageway therebetween; and
- c) applying a pressure differential across the filter housing that extends to the liquid specimen via the liquid inlet of said filter housing to draw the liquid specimen into the filter housing via said liquid inlet and to pass through said liquid-permeable bed of an adsorbent material before leaving the filter housing via said liquid outlet, wherein said differential pressure is applied by evacuating air from said hypobaric chamber via an air outlet using a vacuum pump thereby placing the filter housing under a relative vacuum and adsorbing onto the liquid-permeable bed of an adsorbent material said micro-organisms present in said liquid specimen;
- d) continue applying a pressure differential across the filter housing until an effective amount of said

liquid specimen has passed through said liquid-permeable bed of an adsorbent material;

e) incubating for an effective period of time at a preferred temperature between 30 and 45°C, said liquid-permeable bed of an adsorbent material (through which said liquid specimen has passed) with a liquid growth medium supplemented with a chromogenic and/or fluorogenic substrate in order to detect enzymatic activity of micro-organisms; and

f) monitoring the development of a chromogenic or fluorescent color to establish the presence or absence of micro-organisms adsorbed to adsorbent material, wherein the presence of micro-organisms adsorbed to said adsorbent material indicates the presence of micro-organisms in said liquid specimen.

[0019] In a preferred embodiment of a method of the invention the filter housing is essentially cylindrical and translucent at the position of the bed of an adsorbent material, and wherein said housing preferably has an inner volume of between 1 and 10 ml.

[0020] In another preferred embodiment of a method of the invention the adsorbent material has a positively charged surface and is selected from the group consisting of insoluble metal hydroxides, lectins on a support material, carbodiimides on a support material, cationic polymers on a support material, anion exchange resins, and positively charged electrodes.

[0021] In the instance that the adsorbent material is based on cationic polymers, such polymers are preferably selected from poly-L-lysine, polyethyleneimine and combinations thereof.

[0022] In the instance that the adsorbent material is based on insoluble metal hydroxides, such insoluble metal hydroxides are preferably selected from hydroxyapatite, zirconium hydroxide, titanium hydroxide and hafnium hydroxide. In a most preferred embodiment the adsorbent material is hydroxyapatite.

[0023] The liquid in a specimen of which the micro-organisms are detected using the method of the instant invention is preferably water, most preferably drinking water.

[0024] The vacuum pump is again preferably a hand vacuum pump.

[0025] In further preferred embodiments of the invention, the liquid growth medium and the chromogenic and/or fluorogenic substrate are for the detection of coliforms and/or *E. coli* by detecting enzymatic activity of β -D-galactosidase and/or β -D-glucuronidase, respectively. For that purpose, a method of the invention may very suitably be performed by selecting a chromogenic or fluorogenic substrate from the group consisting of 4-methylumbelliferyl- β -D-glucuronide (MUG); *ortho*-nitrophenyl β -D-glucuronide (ONPG); *para*-nitrophenyl β -D-glucuronide (PNPG); β -naphthalamide- β -D-glucuronide; 6-bromo-2-naphthyl β -D-glucuronide; 5-bromo-4-chloro-3-indolyl β -D-glucuronide (BCIG or X-glucuronide); α -

naphthol- β -D-glucuronide; 4-methylumbelliferyl- β -D-galactopyranoside (MUGal), *ortho*-nitrophenyl- β -D-galactopyranoside (ONPGal); *para*-nitrophenyl- β -D-galactopyranoside (PNPGal); 6-chloro-3-indolyl- β -D-galactopyranoside (Salmon-Gal), 5-bromo-4-chloro-3-indolyl β -D-galactopyranoside (X-Gal); 4-nitrophenyl 1-thio- β -D-galactopyranoside (NPSGal), 6-bromo-2-naphthyl- β -D-galactopyranoside; 3,4-dinitrophenyl β -D-galactopyranoside (DNPGal), functional derivatives, and combinations thereof.

[0026] In a preferred embodiment of a method of the invention, the liquid growth medium comprises allolactose, isopropyl- β -D-thiogalactopyranoside (IPTG) and/or lactose.

[0027] In yet another preferred embodiment, the presence of micro-organisms adsorbed to the adsorbent material is indicative of a potential contamination of said liquid specimen with faecal bacteria.

DESCRIPTION OF THE DRAWINGS

[0028]

Figure 1 illustrates a device according to the present invention indicating the various elements: vacuum pump (1), hypobaric chamber (2), filter housing (3), connective tubing (4). A typical water sample is indicated (5).

Figure 2 shows a photograph (left) and a schematic drawing (right) of the filter housing of the present invention, indicating the various elements in more detail. Filter housing (1) (in this photograph a disposable syringe), pre-filter (coarse) (2), bed of adsorbent material (3), post-filter (fine) (4), liquid inlet (5), liquid outlet (6). The direction of the flow of the liquid specimen is indicated by an arrow.

Figure 3 shows a photograph of the filter housing (1) (in this photograph a disposable syringe), pre-filter (coarse) (2), bed of adsorbent material (3), post-filter (fine) (4), liquid inlet (5), liquid outlet (6). The filter was used to process 10 L of liquid specimen with *E. coli*. A syringe plunger (7) was used to draw chromogenic culture liquid (in this case Cohler®) into the filter housing through the liquid outlet in the direction indicated by an arrow. After incubation for several hours at 37°C the chromogenic liquid has changed from a clear solution into a yellow coloured solution due to metabolic conversion by the micro-organism.

Figure 4 shows the total time from the start of sampling until the observation of a positive test result (in this case a yellow colour), depending on the concentration of viable *Escherichia coli* strain K12 bacteria in a liquid specimen (test sample). This total test time includes the filtration of the 10 L liquid specimen and incubation with a chromogenic solution (in this case Colilert®) at 37°C. For this test the *E. coli* bacteria were pre-grown in Tryptic Soy Broth medium (Oxoid)

and diluted in a physiological salt solution (0.9% Na-Cl) to the appropriate test concentrations.

DETAILED DESCRIPTION OF THE INVENTION

Definitions

[0029] The term "micro-organism", as used herein refers to a diverse group of minute, simple life forms that include archaea, bacteria, yeast, algae, fungi, protozoa, and viruses.

[0030] The term "insoluble metal hydroxides" includes reference to hydroxyapatite.

[0031] The term "hydroxyapatite" and the abbreviation "HA", as used herein, refer to a hydroxylated calcium phosphate, in particular to the substance known as hydroxyapatite *per se* ($\text{Ca}_{10}(\text{PO}_4)_6(\text{OH})_2$ or $\text{Ca}_5(\text{PO}_4)_3\text{OH}$, synonym: (penta)calcium triphosphate having a (stoichiometric) Ca/P ratio of 1.67), but also to:

- calcium-deficient hydroxyapatite $\text{Ca}_{10-x}(\text{HPO}_4)_x(\text{PO}_4)_{6-x}(\text{OH})_{2-x}$ ($0 \leq x \leq 1$) with Ca/P ratio varying from 1.4 to 1.67;
- simulated, synthetic or precipitated hydroxyapatite (PHA) having a Ca/P molar ratio of 1.4-1.8
- hydroxyapatite containing traces of fluor, chlorine and/or carbonate
- mixtures of two or more of the above
- composites comprising one of the above

[0032] The terms "fluidly connected" and "fluid communication", as used herein, are equivalent and refer to the presence of a passageway providing a sealed communication that permits passage of liquids and/or gases between items thus connected.

[0033] The present invention relates to a system for detecting microbial contamination of a liquid specimen comprising a device for concentrating micro-organisms from a liquid specimen essentially as displayed in Figure 1 (the numbers indicate the reference numbers in Figure 1), consisting essentially of three separate parts that may be interconnected and disconnected, or that may be assembled and combined by integration into a single part. These three parts include means for creating hypobaric conditions in a hypobaric chamber (e.g. a vacuum pump) (1), a hypobaric chamber (2) and a filter housing (3) comprising the liquid-permeable bed of an adsorbent material. The device may in principle take any shape, form or configuration suitable.

[0034] The liquid specimen may be any type of liquid, but is preferably water.

[0035] The system of the invention can be operated using very simple methods. The three parts of the device must be functionally interconnected. This can be achieved by connecting both the air inlet of the vacuum pump (1) and the liquid outlet of the filter housing (3) via a suitable conduit, such as a flexible tubing (4), to separate ports of the hypobaric chamber (2). The device of

the present invention may thus be easily assembled and disassembled. For operation, the filter housing is then brought into contact with a suitable liquid source (5), and hypobaric conditions are created in the hypobaric chamber (2) by activating the means (1).

[0036] The filter housing of the present invention is preferably provided in a sterile (aseptic) packaging, which allows transport and storage without premature contamination of the filter housing. For assembly of the device of the present invention, the sterile filter housing is preferably removed aseptically from the sterile packaging and connected aseptically to the remainder of the device.

[0037] The device of the present invention comprises a filter housing. The filter housing may be of any suitable rigid material such as glass, metal, polystyrene, polyacryl, polyamide, polyethylene, polypropylene, acrylate butadiene styrene (ABS), polyvinylchloride (PVC), nylon, ethylene-vinyl acetate (EVA), polyethylene terephthalate (PET) and combinations thereof. The material may for be all clear, white, black or transparent or light-blocking and may in principle be of any colour. The filter housing is preferably essentially cylindrical and translucent at an area between 1 to 5 cm surrounding the position of the bed of adsorbent material, enabling (visual) monitoring of the chromogenic reaction. The filter housing needs not be very large, in fact a conventional syringe is very suitable for use as the filter housing. Such a syringe can have an inner volume of between 1 and 100 ml. Generally, an inner volume of between 1 and 10 ml may be sufficient to house an amount of adsorbent material capable of adsorbing the micro-organisms from as much of 20 litres of water.

[0038] The filter housing is provided with a liquid inlet through which said liquid specimen can enter the filter housing and adapted for engaging with said liquid specimen. Such an adaptation may include a tip or a port connected to a tubing that can be submerged below the liquid surface. It should be noted that due to this adaptation, systems and methods of the invention as described herein below in more detail, do not require the provision of a sample. In fact, the device can be contacted directly with the water body of which the potential faecal contamination is to be determined. This increases the reliability of the systems and methods.

[0039] The filter housing is further provided with a liquid outlet through which said liquid specimen can leave the filter housing. The liquid outlet is adapted for sealably engaging with a hypobaric chamber. Such an adaptation may comprise a port for the connection of tubing. The filter housing may be made heavier than water to promote submersion in liquid.

[0040] The filter housing is further provided with a liquid-permeable bed of an adsorbent material. In order to be liquid-permeable, the adsorbent material may be porous or may take the form of a granulate wherein the liquid can flow through the space between the granules. Pores will suitably have a size of between 5 μm and 1

mm. Also the granules may have a size of between 5 μm and 1 mm. The adsorbent material is preferably housed in the filter housing in the form of a bed through which the liquid must pass. The term bed merely refers to the fact that the liquid cannot flow next to the absorbent material, but that it will flow through the intra- and/or extragranular pores and comes into contact with the surface of the absorbent material, while flowing from the inlet to the outlet. Practically, the bed may be housed in the cylindrical housing in the form of a disk having a thickness of 0.1-10 cm, and a diameter equal to the inner diameter of the filter housing.

[0041] The adsorbent material is capable of adsorbing micro-organisms. Any material, of which it is known that micro-organisms can adsorb to it, can be used. Preferably, the micro-organisms are adsorbed by means of electrostatic interaction, i.e., by charge difference. To that effect, the adsorbent material may suitably be based on insoluble metal hydroxides such as hydroxyapatite, zirconium hydroxide, titanium hydroxide and hafnium hydroxide; lectins on a support material; carbodiimides covalently conjugated to a support material, preferably particulate material with a size of between 5 μm and 1 mm; cationic polymers on a support material such as poly-L-lysine, polyethyleneimine and combinations thereof; anion exchange resins; and positively charged electrodes. Alternatively, positively charged adsorbent materials which may be used are materials comprising metal oxides wherein the metal is selected from aluminium, calcium, cerium and zirconium. These materials may be produced cost-effectively in large amounts as inorganic nanoparticles using flame-spray synthesis technology and are known to effectively adsorb and remove DNA and viruses from water (Link et al., 2007, Inorganic nanoparticles for transfection of mammalian cells and removal of viruses from aqueous solutions. *Biotechnology and Bioengineering* 98(5)1083-1093). The highly adsorbent nanoparticles may have a specific surface area between 50 and 250 $\text{m}^2 \text{g}^{-1}$ and a particle size between 5 and 50 nm and filtration and micro-organism removal may be most effective when they are deposited on a support material (Boccaccini and Zhitomirski, 2002, Application of electrophoretic and electrolytic deposition techniques in ceramics processing. *Current Opinion in Solid State and Materials Science* 6:251-260; Dierstein et al., 2001, Electrochemical deposition under oxidizing conditions (EDOC): a new synthesis for nanocrystalline metal oxides. *Scripta mater.* 44:2209-2212; Ding et al., 2004, Polymer-Monomer pairs as a reaction system for the synthesis of magnetic Fe_3O_4 -Polymer hybrid hollow nanospheres. *Angew. Chem. Int. Ed.* 43:6369-6372).

[0042] In a most preferred embodiment the adsorbent material is hydroxyapatite. Suitable forms of hydroxyapatite are crystalline or ceramic granular or particulate hydroxyapatite, typically having a (spherical) particle size of between 5 μm and 1 mm. The hydroxyapatite may be in a macroporous form, wherein a pore size of between 5 μm and 1 mm is suitable. Particle sizes and pore sizes

of the adsorbent (and/or support) material may be adjusted to control the flow of liquid through the bed of adsorbent material.

[0043] As a support material use can be made of hydroxyapatite spheres, or any other mineral particles of the appropriate size. Suitable particles include particles prepared from inorganic materials, such as silicates, glass, metal, ceramics, and clay minerals; and particles of organic materials, such as paper, wood, latex or synthetic polymers (e.g. plastics). The particles should have an approximate size between 5 μm and 1 mm. The particles may be solid or porous.

[0044] Alternatively, as a support material, an open-cell foam or wadding (a soft mass or sheet of fibres) of synthetic material, with pore sizes between 5 μm and 1 mm, may be used, such as stone wadding, polyurethane, neoprene, polyolefin or paper.

[0045] In order to prevent clogging of the liquid-permeable bed of adsorbent material and to keep the bed in place, a pre-filter may be placed in front of the adsorbent material (that is in the direction of the liquid inlet). Such a pre-filter may for instance be made of porous polyurethane (open cell) foam, porous neoprene, porous polyolefin or stone wadding.

[0046] In order to prevent inadvertent removal of the adsorbent material from the bed as a result of the liquid flow, especially when the adsorbent material is provided in granular form, a post-filter may be placed at the back of the adsorbent material (that is in the direction of the liquid outlet). Such a post-filter may for instance be made of porous polyurethane (open cell) foam, porous neoprene, porous polyolefin or stone wadding.

[0047] Suitable pre- and post-filters have a surface size so as to essentially cover the bed of adsorbent material on either side. The thickness of the pre- and post-filters may be 0.1 to 10 cm or more.

[0048] The device of the present invention further comprises a hypobaric chamber. The term refers to a hollow space in which a relative vacuum can be established.

The chamber is an essentially closed element of any shape. Very suitably, the chamber is formed by the interior of a housing having an essentially cylindrical side wall (hypobaric chamber wall) and having a closed top and bottom end, but other shapes are equally suitable.

The liquid inlet and air outlet may in principle be positioned in the wall, top or bottom end of the chamber, but are preferably provided in the top end of the chamber. The purpose of the hypobaric chamber is to provide a relative vacuum extending via the liquid outlet of the filter housing, via the liquid-permeable filter bed to the liquid inlet of the filter housing to draw the liquid specimen into the filter housing. The purpose of the hypobaric chamber is further to provide a relative vacuum of essentially constant level in order to provide for a constant flow of liquid through the liquid-permeable bed of adsorbent material.

[0049] Since generally an amount of several litres of liquid will be drawn towards the source of the relative vacuum and to flow through the bed of an adsorbent ma-

terial in order to concentrate sufficient numbers of micro-organisms on the adsorbent material for subsequent detection, this liquid will initially fill the filter housing (which has an internal volume of generally not more than 1-1000 mL) and upon continuation of the application of a relative vacuum in the hypobaric chamber and the ensuing a pressure differential across the filter housing, the filtered liquid will start to flow out of the filter housing via the liquid outlet through the sealed passageway (between the filter housing and the hypobaric chamber) and eventually into the hypobaric chamber. As a consequence, the hypobaric conditions in said chamber will deteriorate due to the entry of liquid. To that end, the hypobaric chamber will comprise a liquid collection moiety. Very suitable, the liquid collection moiety may be comprised by the lowest part of the chamber (effectively that part where the filtered liquid is collected). In order to prevent deterioration of the hypobaric conditions in the chamber, the filtered liquid may be evacuated from the hypobaric chamber, for instance via a liquid-permeable and air impermeable membrane or by a gravity-valve, preventing the entry of air into the hypobaric chamber, but allowing the release or discharge of liquid from the chamber. In a further alternative embodiment, the liquid can be removed before entry into the hypobaric chamber, for instance by providing discharge or storage or collection means in or at the location of the passageway between the filter housing and the hypobaric chamber. In a preferred embodiment the hypobaric chamber is formed by the internal space of a storage or collection vessel, by evacuating air from that vessel, and the deterioration of the hypobaric conditions is remedied by further evacuation of air from the chamber using the vacuum pump.

[0050] The hypobaric chamber may be prepared from any suitable material that can withstand a slight hypobaric condition without collapsing in itself. The chamber may be of any suitable rigid material such as glass, metal, polystyrene, polyacryl, polyamide, polyethylene, polypropylene, acrylate butadiene styrene (ABS), polyvinylchloride (PVC), nylon, ethylene-vinyl acetate (EVA), polyethylene terephthalate (PET) and combinations thereof. The material may for instance be all clear, white, black or transparent or light-blocking and may in principle be of any colour.

[0051] It should be noted that the liquid collected in the liquid collection moiety of the hypobaric chamber is low in micro-organisms, because most micro-organisms will have been removed from the liquid through adsorption to the liquid-permeable bed of adsorbent material. In case the liquid is water, this water will be microbiologically safer than the original water specimen tested for contamination. Thus, the device of the present invention may also be used to reduce the microbial load of liquids.

[0052] The device of the present invention further comprises means for creating hypobaric conditions in the hypobaric chamber. The means for creating hypobaric conditions in a hypobaric chamber, generally referred to herein as the vacuum pump but certainly not limited to

the commercially available devices known by that name, should provide for the possibility of generating a relative vacuum in the filter housing to allow liquid to be drawn into the filter housing and through the liquid-permeable bed of an adsorbent material. Ultimately, the liquid will enter into the hypobaric chamber. The vacuum pump may thus in principle be a piston that is in sealing and sliding contact with the walls of the hypobaric chamber. A small pressure differential across the filter housing (where the pressure at the location of the liquid inlet will be essentially atmospheric, and where the pressure at the location of the liquid outlet is essentially below atmospheric) will usually be sufficient to obtain the required result of drawing the liquid specimen through the liquid-permeable bed of an adsorbent material. A pressure differential across the filter housing may be in the order of 760 to 76 torr (wherein 760 torr equals 760 mm Hg @ 0°C or 1 atm abs or ca. 1013 mbarA or 101.325 kPa), preferably Vacuum pressures between 760 and 228 torr work well.

[0053] The term "system" as used herein refers to an arrangement of materials optionally in combination with a particular method of use of that arrangement to achieve the objective. A system for detecting micro-organisms in a liquid specimen according to the present invention comprises the device as described above and a kit for the detection of said micro-organisms. The term "kit", as used herein, refers to a multitude of components or any combination of elements or interrelated parts, provided together in any form, preferably by providing them in a common package or alternatively by providing at least one component with usage instructions, preferably in printed form, referring to at least one other component, necessary for detecting enzymatic activity specific for the micro-organism that is to be detected.

[0054] The kit will generally comprise a chromogenic and/or fluorogenic substrate, suitably incorporated into a suitable growth medium, for supporting the proliferation of the microorganism, and optionally instructions for assembling, operating and disassembling the device, and/or detecting microorganisms concentrated in said device by using the detection kit. In order to induce the expression of the enzyme that is to be detected, specific inducers may be added to the growth medium (herein referred to as enzyme inducing agents). In the case of coliforms and *E. coli* wherein the detection of the lactose-converting enzymes is tested, the liquid growth medium may suitably comprise such inducers as allolactose, isopropyl-β-D-thiogalactopyranoside (IPTG) and/or lactose.

[0055] Kits for the detection of micro-organisms based on a chromogenic and/or fluorogenic substrate are well known in the art, and use can be made of any of several commercial kits available from various suppliers. A very suitable kit for the detection of thermotolerant coliforms and *E. coli* is the Colilert® Testkit (IDEXX Laboratories, Inc., Westbrook, Maine, USA). More information about Colilert® Tests can be found in US patents 4,925,789; 5,429,933; 5,518,892; 5,610,029; 5,620,865; 5,620,895;

5,690,825; 5,700,655; 5,753,456; 5,780,259; 5,985,594; 6,287,797; 6,329,166; 6,387,650; 6,472,167; 6,509,168; 6,730,496; and 6,783,950. Other chromogenic kits that work well are Colilert, Colisure (IDEXX, USA); ColiComplete (Biocontrol, USA); Fluorocult LMX, ReadyCult coliforms (Merck, Germany); E. colite (Charm Sci., USA) and Coliquick, m-Colibblue (Hach, USA) (Manfani, 2000, New developments in chromogenic and fluorogenic culture media. International Journal of Food Microbiology 60:205-218).

[0056] The instructions for use of the device and the detection kit may comprise the general outline of the method of the present invention for detecting micro-organisms in a liquid specimen as described herein.

[0057] A method of the invention for detecting micro-organisms in a liquid specimen preferably makes use of a device of the invention. The device is assembled by fluidly connecting the separate elements of the device. The method commences with engaging the liquid inlet of the filter housing with the liquid specimen and evacuating air from said hypobaric chamber via an air outlet using a vacuum pump in any order.

[0058] Correct assembly of the device and generation of the hypobaric conditions in the hypobaric chamber will result in a relative vacuum extending to the liquid inlet of the filter housing, which will then draw in the liquid. When the liquid has filled the filter housing, the hypobaric conditions in the hypobaric chamber are maintained and a pressure differential across the filter housing will result that extends to the liquid specimen via the liquid inlet thereby drawing into the filter housing yet more liquid. The liquid that has passed through the bed of adsorbent material will leave the filter housing via said liquid outlet and will be collected in the collection moiety. The pressure differential across the filter housing and the contact between the liquid and the inlet of the filter housing is maintained until sufficient liquid has passed through the bed of adsorbent material.

[0059] As used herein, the skilled person will understand that the effective amount of the liquid specimen that needs to be filtered depends largely on the load in the liquid specimen of the micro-organism that is to be detected. Small loads (low contamination levels) will require concentration of the micro-organisms from large volumes of liquid in order to obtain a number of adsorbed micro-organisms that can be detected using minimal incubation periods for growth of the micro-organism. Alternatively, when long incubation periods for growth of the micro-organism are not problematic, a small number of adsorbed micro-organisms can still result in a positive detection result, even when small volumes of liquid have been analyzed.

[0060] In a method of the invention it is preferred that the volume of liquid that is analysed (passed through the bed of adsorbent material) is large (1-100 litres) in order to minimize the time required for additional cultivation of the adsorbed micro-organisms.

[0061] The relative vacuum generated in the hypobaric

chamber is preferably such that the flow through the bed of adsorbent material is about 50 to 150 m/h. Generally a flow of 100 m/h (calculated as the amount of liquid pumped through the filter bed (the granular bed of adsorbent material) per unit of time (in L/h) times the surface area of the filter bed through which the liquid passes (e.g. a filter bed positioned in a cylindrical housing having a radius of 0.69 cm having a surface area of the $\pi r^2 = 1,5 \text{ cm}^2$) is low enough to achieve an adsorption efficiency of micro-organisms on the adsorbent that exceeds 80%, while rapid enough to allow the filtration of 1-100 litres, preferably about 10-50, most preferably about 5-15 litres of liquid, typically in less than 30 minutes.

[0062] Once the desired amount of liquid has been passed through the bed of adsorbent material, the bed of an adsorbent material with the micro-organisms adsorbed thereto is incubated with a liquid growth medium supplemented with a chromogenic and/or fluorogenic substrate. Alternatively, the chromogenic and/or fluorogenic substrate may be covalently bound to the filter bed material.

[0063] For this step suitable use is made of the liquid growth medium supplemented with a chromogenic and/or fluorogenic substrate as provided by a commercial kit as described above. The incubation commences by contacting the adsorbent material with the supplemented growth medium. This may for instance be achieved by disconnecting the filter housing from the hypobaric chamber, draining the filter housing of residual liquid from said liquid specimen and adding supplemented growth medium to the bed of adsorbent material the, for instance by using a needle and syringe. Alternatively, vacuum can be used to draw the supplemented growth medium into the filter housing to soak the adsorbent material with supplemented growth medium.

[0064] The incubation, which is preferably performed at about 30-45, most preferably around 37°C to determine total coliform and/or *E. coli* bacteria, is performed for an effective period of time. A temperature of 44-45°C is preferred to determine thermotolerant coliforms and/or *E. coli*. The skilled person will readily understand that the duration of said effective period of time depends largely on the load on the adsorbent material of the micro-organism that is to be detected. Suitable periods may be determined by routine experimentation. Generally, a period of about 1-8 hours, typically 2-6, most typically 3-4 hours is an effective period in order to detect enzymatic activity of micro-organisms.

[0065] An important advantage of the device and method of the present invention is that after concentration of the micro-organisms in the filter housing and addition of the liquid growth medium, the entire filter housing may for instance be placed under the armpit of a human to provide for the required incubation temperature of around 37°C (i.e. 36-38°C).

[0066] During the incubation period, wherein the micro-organisms are allowed to grow and metabolise the chromogenic and/or fluorogenic substrate, the process

of colour or fluorescence development can be monitored, either visually using suitable illumination, or by using suitable fluorescence detection equipment. The development of a colour in the filter housing at and/or around the area of the bed of adsorbent material indicates the presence of micro-organisms adsorbed to adsorbent material, derived from said liquid specimen.

[0067] A method of the invention may be performed multiple times on the same liquid specimen. Reliable testing requires representative sampling. The recommended minimal number of microbiological analyses depends on the population supplied with water from a specific drinking water source. WHO guidelines require roughly 1 analysis per month per 5,000 individuals using the water.

[0068] The invention will now be described in more detail in the following non limiting Examples.

Claims

1. A device for concentrating micro-organisms from a liquid specimen, comprising:

- a filter housing comprising:

- a liquid inlet through which said liquid specimen can enter the filter housing and adapted for engaging with said liquid specimen,
 - a liquid outlet through which said liquid specimen can leave the filter housing and adapted for sealably engaging with a hypobaric chamber, and
 - a liquid-permeable bed of an adsorbent material housed in the filter housing between said liquid inlet and liquid outlet and capable of adsorbing micro-organisms, whereby when a pressure differential is applied across the filter housing the liquid specimen is drawn into the filter housing via the liquid inlet and passes through said liquid-permeable bed of an adsorbent material before leaving via said liquid outlet;

- a hypobaric chamber having a liquid inlet adapted for sealably engaging with the liquid outlet of said filter housing and further having an air outlet for evacuating air from said hypobaric chamber; and
 - a vacuum pump adapted for sealably engaging with the air outlet of said hypobaric chamber.

2. Device according to claim 1, wherein said filter housing is essentially cylindrical and translucent at the position of the bed of an adsorbent material, and wherein said housing preferably has an inner volume of between 1 and 10 ml.

3. Device according to claim 1 or 2, wherein said ad-

sorbent material has a positively charged surface and is selected from the group consisting of insoluble metal hydroxides, lectins on a support material, carbodiimides on a support material, cationic polymers on a support material, anion exchange resins, and positively charged electrodes.

4. Device according to claim 3, wherein said cationic polymers are selected from poly-L-lysine, polyethyleneimine and combinations thereof.

5. Device according to claim 3, wherein said insoluble metal hydroxides are selected from hydroxyapatite, zirconium hydroxide, titanium hydroxide and hafnium hydroxide.

6. Device according to claim 1 or 2, wherein said adsorbent material comprises metal oxide nanoparticles on a support material, wherein said metal is selected from aluminium, calcium, cerium, or zirconium.

7. Device according to claim 5, wherein said adsorbent material is hydroxyapatite.

8. Device according to any one of the preceding claims, wherein said liquid is water.

9. Device according to any one of the preceding claims, wherein said vacuum pump is a hand vacuum pump.

10. A system for detecting micro-organisms in a liquid specimen, comprising:

- a device for concentrating micro-organisms from a liquid specimen according to any one of claims 1-9;
- a kit for the detection of said micro-organisms by detecting enzymatic activity specific for said micro-organism comprising:

- a chromogenic and/or fluorogenic substrate,
 - a liquid growth medium;

and

- optionally instructions for assembling, operating and disassembling the device, and/or detecting micro-organisms concentrated in said device by using said detection kit.

11. System according to claim 10, wherein said kit is for the detection of coliforms and/or *E. coli* by detecting enzymatic activity of β -D-galactosidase and/or β -D-glucuronidase, respectively.

12. System according to claim 11, wherein said β -D-glucuronidase and/or β -D-galactosidase activity is de-

- tested by using a chromogenic or fluorogenic substrate selected from the group consisting of 4-methylumbelliferyl- β -D-glucuronide (MUG); *ortho*-nitrophenyl β -D-glucuronide (ONPG); *para*-nitrophenyl β -D-glucuronide (PNPG); β -naphthalamide- β -D-glucuronide; 6-bromo-2-naphthyl β -D-glucuronide; 5-bromo-4-chloro-3-indolyl β -D-glucuronide (BCIG or X-glucuronide); α -naphthol- β -D-glucuronide; 4-methylumbelliferyl- β -D-galactopyranoside (MUGal), *ortho*-nitrophenyl- β -D-galactopyranoside (ONPGal); *para*-nitrophenyl- β -D-galactopyranoside (PNPGal); 6-chloro-3-indolyl- β -D-galactopyranoside (Salmon-Gal), 5-bromo-4-chloro-3-indolyl β -D-galactopyranoside (X-Gal); 4-nitrophenyl 1-thio- β -D-galactopyranoside (NPSGal), 6-bromo-2-naphthyl- β -D-galactopyranoside; 3,4-dinitrophenyl β -D-galactopyranoside (DNPGal), functional derivatives, and combinations thereof.
13. System according to claim 11 or 12, wherein said liquid growth medium comprises allolactose, isopropyl- β -D-thiogalactopyranoside (IPTG) and/or lactose.
14. A method for detecting micro-organisms in a liquid specimen, said method comprising the steps of:
- engaging a liquid inlet of a filter housing with a liquid specimen, wherein said filter housing has a liquid outlet and houses a liquid-permeable bed of an adsorbent material in between said liquid inlet and said liquid outlet, wherein said adsorbent material is capable of adsorbing micro-organisms;
 - placing the liquid outlet of said filter housing in fluid communication with a liquid inlet of a hypobaric chamber, by means of a sealed passage-way therebetween; and
 - applying a pressure differential across the filter housing that extends to the liquid specimen via the liquid inlet of said filter housing to draw the liquid specimen into the filter housing via said liquid inlet and to pass through said liquid-permeable bed of an adsorbent material before leaving the filter housing via said liquid outlet, wherein said differential pressure is applied by evacuating air from said hypobaric chamber via an air outlet using a vacuum pump thereby placing the filter housing under a relative vacuum and adsorbing onto the liquid-permeable bed of an adsorbent material said micro-organisms present in said liquid specimen;
 - continue applying a pressure differential across the filter housing until a effective amount of said liquid specimen has passed through said liquid-permeable bed of an adsorbent material;
 - incubating for an effective period of time said liquid-permeable bed of an adsorbent material
- with a liquid growth medium supplemented with a chromogenic and/or fluorogenic substrate in order to detect enzymatic activity of micro-organisms;
- monitoring the development of a chromogenic or fluorescent color to establish the presence or absence of micro-organisms adsorbed to adsorbent material, wherein the presence of micro-organisms adsorbed to said adsorbent material indicates the presence of micro-organisms in said liquid specimen.
15. Method according to claim 14, wherein said adsorbent material is selected from the group consisting of insoluble metal hydroxides, lectins on a support material, carbodiimides on a support material, cationic polymers on a support material, anion exchange resins, and positively charged electrodes.
16. Method according to claim 14, wherein said cationic polymers are selected from poly-L-lysine, polyethyleneimine and combinations thereof.
17. Method according to claim 15, wherein said insoluble metal hydroxides are selected from hydroxyapatite, zirconium hydroxide, titanium hydroxide and hafnium hydroxide.
18. Method according to claim 14, wherein said adsorbent material comprises metal oxide nanoparticles on a support material, wherein said metal is selected from aluminium, calcium, cerium, or zirconium.
19. Method according to claim 14, wherein said adsorbent material is hydroxyapatite.
20. Method according to any one of claims 14-19, wherein said liquid is water.
21. Method according to any one of claims 14-20, wherein said vacuum pump is a hand vacuum pump.
22. Method according to any one of claims 14-21, wherein said liquid growth medium and said chromogenic and/or fluorogenic substrate are for the detection of coliforms and/or *E. coli* by detecting enzymatic activity of β -D-galactosidase and/or β -D-glucuronidase.
23. Method according claim 22, wherein said chromogenic and/or fluorogenic substrate is selected from the group consisting of 4-methylumbelliferyl- β -D-glucuronide (MUG); *ortho*-nitrophenyl β -D-glucuronide (ONPG); *para*-nitrophenyl β -D-glucuronide (PNPG); β -naphthalamide- β -D-glucuronide; 6-bromo-2-naphthyl β -D-glucuronide; 5-bromo-4-chloro-3-indolyl β -D-glucuronide (BCIG or X-glucuronide); α -naphthol- β -D-glucuronide; 4-methylumbelliferyl- β -

D-galactopyranoside (MUGal), *ortho*-nitrophenyl- β -D-galactopyranoside (ONPGal); *para*-nitrophenyl- β -D-galactopyranoside (PNPGal); 6-chloro-3-indolyl- β -D-galactopyranoside (Salmon-Gal), 5-bromo-4-chloro-3-indolyl β -D-galactopyranoside (X-Gal); 4-nitrophenyl 1-thio- β -D-galactopyranoside (NPSGal), 6-bromo-2-naphthyl- β -D-galactopyranoside; 3,4-dinitrophenyl β -D-galactopyranoside (DNPGal), functional derivatives, and combinations thereof.

24. Method according to claim 22 or 23, wherein said liquid growth medium comprises enzyme inducing agents such as allolactose, isopropyl- β -D-thiogalactopyranoside (IPTG) and/or lactose.
25. Method according to any one of claims 22-24, wherein the presence of micro-organisms adsorbed to said adsorbent material is indicative of a potential contamination of said liquid specimen with faecal bacteria.

25

30

35

40

45

50

55

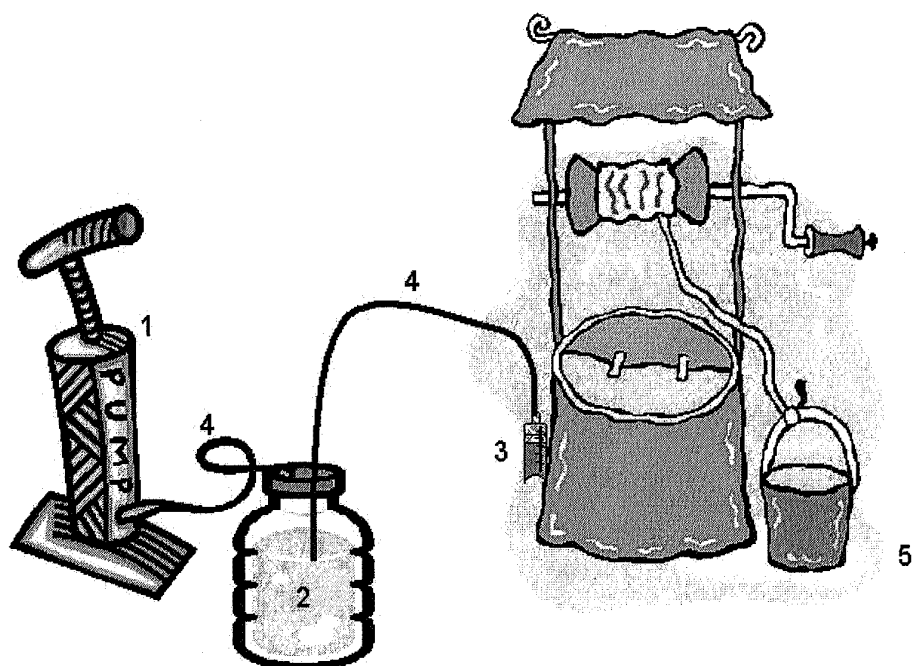


Figure 1

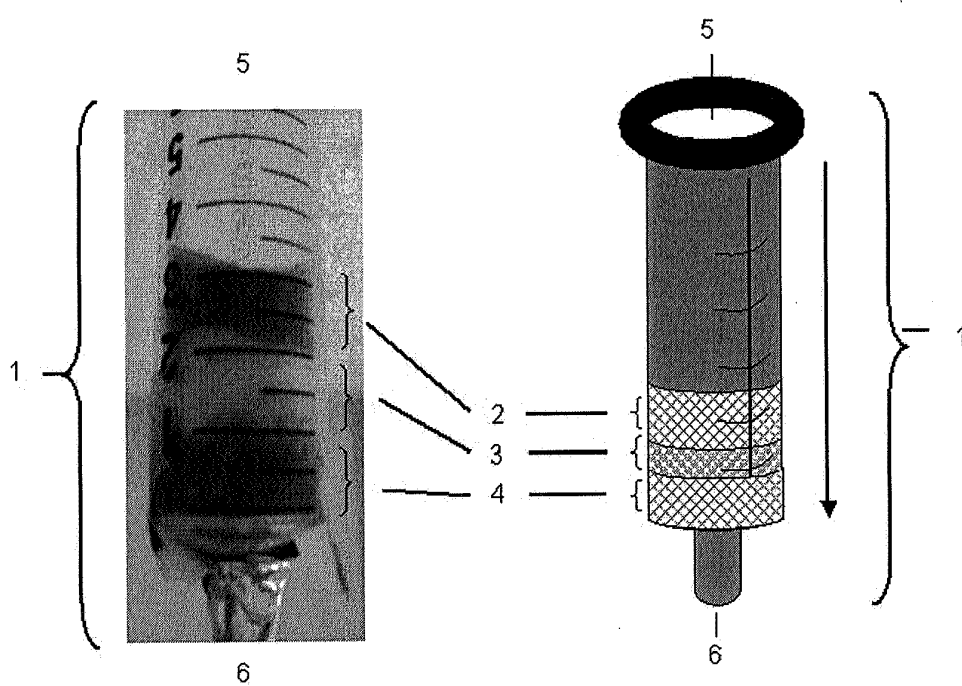


Figure 2

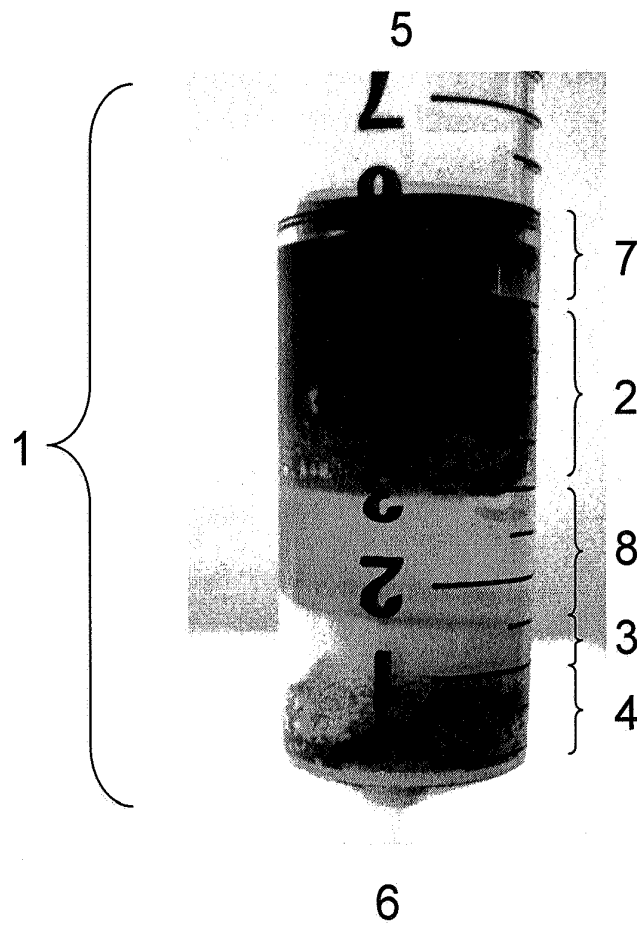


Figure 3

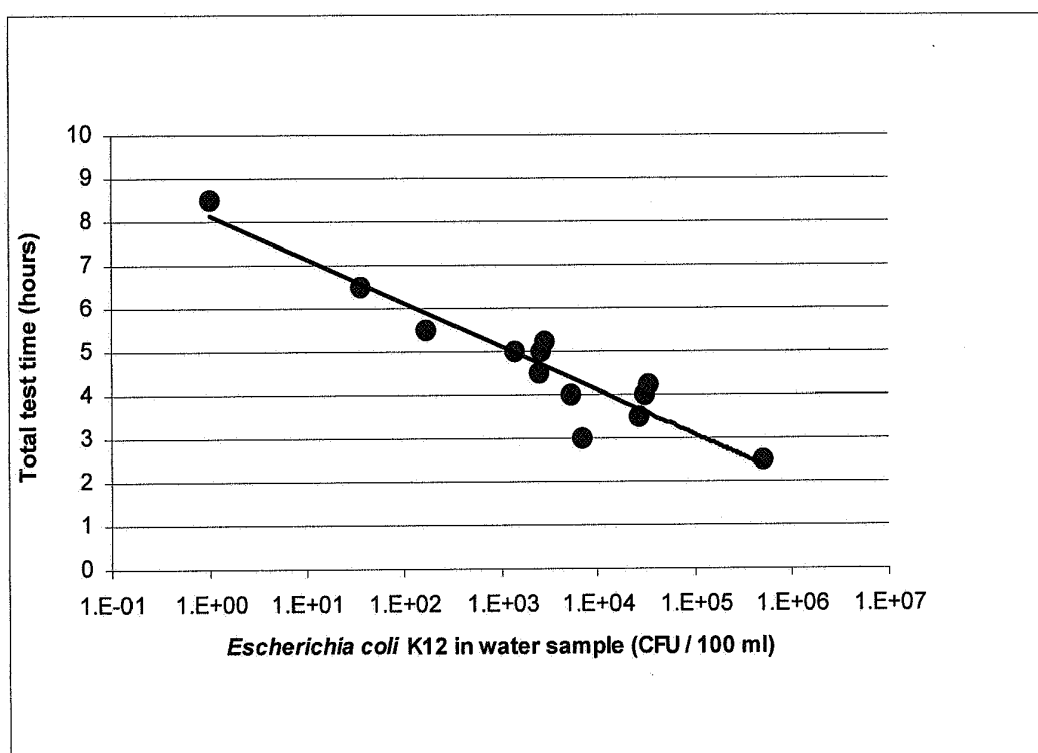


Figure 4



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 07 12 1431

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	WO 2005/083109 A (MYCOMETER APS [DK]; REESLEV MORTEN [DK]; MILLER MORTEN [DK]) 9 September 2005 (2005-09-09) * page 4, line 18 - page 6, line 25 *	1	INV. C12Q1/04
A	WO 99/47637 A (AMANZI TECHNOLOGIES LIMITED [IE]; MCNERNEY MICHAEL JAMES [ZA]; PIGOTT) 23 September 1999 (1999-09-23) * page 8, line 1 - page 9, line 14 *	1	
X	US 2005/048474 A1 (AMBURGEY JAMES EMANUEL [US]) 3 March 2005 (2005-03-03) * paragraph [0011]; claims 17,18 *	1	
A	US 4 871 662 A (ROSOV EUGENE [US]) 3 October 1989 (1989-10-03) * column 3, lines 28-31 *	1	
A	WO 2006/125109 A (IDEXX LAB INC [US]; GU HAOYI [US]) 23 November 2006 (2006-11-23) * page 4, line 1 - page 10, line 21 *	1	
A	WO 96/14431 A (STUDIECENTRUM VOOR WATER [BE]; UNIV GENT [BE]; NELIS JOZEF CONSTANTIA) 17 May 1996 (1996-05-17) * page 8, line 12 - page 11, line 25 *	1	TECHNICAL FIELDS SEARCHED (IPC) C12Q
A	WO 01/59157 A (MILLIPORE CORP [US]; YOUNG BARBARA [US]; PRESENTE ESTHER [US]; SAGE AN) 16 August 2001 (2001-08-16) * claim 1 *	1	
The present search report has been drawn up for all claims			
Place of search Berlin		Date of completion of the search 20 May 2008	Examiner Clement, Jean-Paul
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503 03/82 (P04/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 07 12 1431

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-05-2008

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 2005083109	A	09-09-2005	AU 2005217026 A1	09-09-2005
			CA 2557487 A1	09-09-2005
			EP 1725676 A1	29-11-2006
			JP 2007525227 T	06-09-2007

WO 9947637	A	23-09-1999	AU 3268299 A	11-10-1999
			EP 1064351 A1	03-01-2001
			JP 2002506632 T	05-03-2002
			US 6287849 B1	11-09-2001

US 2005048474	A1	03-03-2005	NONE	

US 4871662	A	03-10-1989	NONE	

WO 2006125109	A	23-11-2006	AU 2006247126 A1	23-11-2006
			CA 2607073 A1	23-11-2006
			EP 1883694 A1	06-02-2008

WO 9614431	A	17-05-1996	AU 713480 B2	02-12-1999
			AU 3865295 A	31-05-1996
			DE 69519747 D1	01-02-2001
			DE 69519747 T2	09-08-2001
			EP 0791070 A1	27-08-1997
			ES 2155144 T3	01-05-2001
			JP 11505405 T	21-05-1999
			US 5861270 A	19-01-1999

WO 0159157	A	16-08-2001	EP 1254273 A2	06-11-2002
			JP 3808773 B2	16-08-2006
			JP 2003530830 T	21-10-2003

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 4925789 A [0055]
- US 5429933 A [0055]
- US 5518892 A [0055]
- US 5610029 A [0055]
- US 5620865 A [0055]
- US 5620895 A [0055]
- US 5690825 A [0055]
- US 5700655 A [0055]
- US 5753456 A [0055]
- US 5780259 A [0055]
- US 5985594 A [0055]
- US 6287797 A [0055]
- US 6329166 A [0055]
- US 6387650 A [0055]
- US 6472167 A [0055]
- US 6509168 A [0055]
- US 6730496 A [0055]
- US 6783950 A [0055]

Non-patent literature cited in the description

- **LINK et al.** Inorganic nanoparticles for transfection of mammalian cells and removal of viruses from aqueous solutions. *Biotechnology and Bioengineering*, 2007, vol. 98 (5), 1083-1093 [0041]
- **BOCCACCINI ; ZHITOMIRSKI.** Application of electrophoretic and electrolytic deposition techniques in ceramics processing. *Current Opinion in Solid State and Materials Science*, 2002, vol. 6, 251-260 [0041]
- **DIERSTEIN et al.** Electrochemical deposition under oxidizing conditions (EDOC): a new synthesis for nanocrystalline metal oxides. *Scripta mater*, 2001, vol. 44, 2209-2212 [0041]
- **DING et al.** Polymer-Monomer pairs as a reaction system for the synthesis of magnetic Fe₃O₄-Polymer hybrid hollow nanospheres. *Angew. Chem. Int. Ed.*, 2004, vol. 43, 6369-6372 [0041]
- **MANFANI.** New developments in chromogenic and fluorogenic culture media. *International Journal of Food Microbiology*, 2000, vol. 60, 205-218 [0055]