

TNO-rapport**TNO 2015 R10955****Correction algorithms for WLTP chassis
dynamometer and coast-down testing****Earth, Life & Social Sciences**

Van Mourik Broekmanweg 6

2628 XE Delft

Postbus 49

2600 AA Delft

www.tno.nl

T +31 88 866 30 00

F +31 88 866 30 10

Datum	9 July 2015
Auteur(s)	Norbert E. Ligterink Pim van Mensch Rob F.A. Cuelenaere Stefan Hausberger David Leitner G�rard Silberholz
Exemplaarnummer	2016-TL-RAP-0100293115
Aantal pagina's	120 (incl. bijlagen)
Aantal bijlagen	7
Opdrachtgever	European Commission, DG Clima Framework Contract ENTR/F1/2009/030 – Lot 4
Projectnaam	WLTP correction algorithms
Projectnummer	060.03678

Alle rechten voorbehouden.

Niets uit deze uitgave mag worden vermenigvuldigd en/of openbaar gemaakt door middel van druk, foto-kopie, microfilm of op welke andere wijze dan ook, zonder voorafgaande toestemming van TNO.

Indien dit rapport in opdracht werd uitgebracht, wordt voor de rechten en verplichtingen van opdrachtgever en opdrachtnemer verwezen naar de Algemene Voorwaarden voor opdrachten aan TNO, dan wel de betreffende terzake tussen de partijen gesloten overeenkomst.

Het ter inzage geven van het TNO-rapport aan direct belang-hebbenden is toegestaan.

Table of contents

	Summary	5
1	Introduction.....	16
1.1	Chassis dynamometer testing	17
1.2	The physical principles of coast down testing	18
2	Correction algorithms for chassis dynamometer tests in WLTP	20
2.1	Calculation of the vehicle specific Veline equation.....	20
2.2	Deviation against target speed	22
2.3	Quality of reference fuel	25
2.4	Inlet air temperature and humidity	29
2.5	Battery state of charge.....	32
2.6	Temperatures from preconditioning and soak	35
2.7	Inaccuracy of road load setting.....	39
2.8	Electrified vehicles	43
2.9	Gear shifts	43
2.10	Accuracy of relevant sensor signals for correction functions	46
3	WLTP coast-down test procedure	48
3.1	Corrections included in the WLTP	48
3.2	Vehicle preparation.....	52
3.3	Vehicle conditioning.....	53
3.4	Coast-down test.....	53
4	Ambient conditions	56
4.1	Weather	56
4.2	Wind.....	59
4.3	Test track	61
5	Inertia	64
5.1	Vehicle weight.....	64
5.2	Weight balance only has a minor influence on coast-down and therefore it has not been considered for further analysis."Rotating inertia.....	65
6	Rolling resistance.....	68
6.1	Tyre.....	68
6.2	Drive line resistance	69
7	Air-drag.....	71

7.1	Vehicle model variations.....	71
8	Literature	73
9	Signature	74

Bijlage(n)

- A. Abbreviations
- B. Standard conditions
- C. Application of the correction methods on chassis dyno tests
 - c.1 TUG vehicle
 - c.2 JRC vehicle
 - c.3 JARI vehicle
- D. Coast down formulae
 - d.1 Coast down curve
 - d.2 $F_1=0$ approximation
- E. Coast down validation
 - e.1 WLTP corrections
 - e.2 Consistent effects as observed
- F. Coast down test program
 - f.1 Background
 - f.2 Aim and approach
 - f.3 Structure of this appendix
 - f.4 Test vehicle
 - f.5 Test tracks
 - f.6 Test equipment
 - f.7 Test procedure
 - f.8 Coast-down measurement program
 - f.9 Reference situation
 - f.10 Rolling resistance and inertia
 - f.11 Alternative wheel alignment
 - f.12 Test mass high and extra low
 - f.13 Air resistance
 - f.14 Ambient conditions and road properties
- G. Suggested WLTP gtr amendments for deviation against target speed and road load calibration

g.1 Amendments describing the correction for deviations against the target speed

g.2 Amendments in the definition of road load calibration on the chassis dynamometer

Summary

The flexibilities allowed in the WLTP are necessary to allow efficient testing without having a lot of invalid tests. Nevertheless some of the flexibilities can influence the resulting fuel consumption to an extent which makes it worth considering the application of correction functions to compensate for deviations against the target values. Such correction functions have several benefits:

- + The repeatability increases
- + In test programs other than type approval tests, larger deviations against the target values may be typical. In such cases the application of the correction functions could help to make single tests better comparable and to increase the repeatability.
- + Making use of the flexibilities to reduce the CO₂ test result gives a better type approval value but does not influence the real world CO₂ emissions. Thus the test result should reflect reality better if the result is corrected for deviations against the target values of the test procedure.
- + The need to optimise the position of the test conditions within the range of flexibilities is reduced to a large extent. Making use of flexibilities ranges from driver training over calibration of test utilities up to optimising the alternator control unit to cycle conditions. Eliminating the need for optimisation of such parameters shall reduce the overall effort for testing without negative effect on real world CO₂ emissions.
- A negative impact is that the complexity of the test evaluation increases and additional signals need to be measured, such as current flow to and from the battery.

The report investigates a series of corrections that could be applied to variations of test parameters within the tolerances ranges allowed by the WLTP GTR provisions. The corrections cover both the chassis dynamometer and coast down test procedure.

The proposed corrections have been discussed with stakeholders on numerous occasions, particularly in the WLTP Informal Working Group (IWG)¹ and the Working Party on Pollution and Energy (GRPE)² both residing under the United Nations in Geneva. Several of the proposed corrections have already been adopted by the WLTP Informal Working Group and will be implemented in the WLTP global technical regulation phase 1b, scheduled for publication in 2016. Some proposals were rejected by the WLTP IWG and GRPE and the Commission Services decided not to proceed with these proposals. Other proposals are suited for introduction as part of the EU implementation of the WLTP. These proposals will be further developed outside the scope of this project.

The following table provides an overview for the further proceedings with respect to the individual cycle tolerances investigated in the report. The numbers refer to the paragraphs in the main report.

¹ <https://www2.unece.org/wiki/display/trans/WLTP+8th+session>

² <http://www.unece.org/trans/main/wp29/wp29wgs/wp29grpe/grpeinf69.html>

Correction type	Progress
2.2 Deviation against target speed	The method for addressing the issue is fully developed in the report, relevant impact on CO ₂ emissions of up to 5%. Deviation against target speed will be a WLTP Phase 2 working item.
2.3 Quality of reference fuel	Impact on CO ₂ emissions still to be investigated outside timeframe of this project.
2.4 Inlet air temperature and humidity	Impact on CO ₂ emissions found by simulation is low. In contrary measurements on one vehicle shows influence up to 2%. Influences from ECU controllers and from physical effects are unclear yet.
2.5 Battery state of charge correction	Battery SOC correction is already included in WLTP Phase 1. The significant impact on CO ₂ emissions (of up to 3%) is confirmed.
2.6 Temperature from preconditioning and soak	Very small impact on CO ₂ emissions (< 0,4%)
2.7 Inaccuracy of road load setting on the chassis dynamometer	Several options for addressing the issue are available, relevant impact on CO ₂ emissions of up to 3%. Proposal on time between warm-up and testing adopted for WLTP Phase 1b.
2.9 Deviation from designated gear shift points	There seems to be a relevant influence on CO ₂ emissions, however there are no ideas yet how the issue could be addressed as long as gear shifts are not recorded in the test.
3.2 Vehicle preparation for coast down: toe-in prescription	There is a relevant influence of the wheel alignment on road load coefficients. Proposal adopted for WLTP Phase 1b.
3.3 Vehicle conditioning for coast down: tyre pressure monitoring/control	There is a relevant influence of the tyre pressure on road load coefficients, the requirements suggested are not so straightforward to implement. Concrete proposal available.
4.1 Ambient weather conditions at coast down: temperature, air pressure, water content of the air	There is a relevant influence of these parameters on the air drag measured at coast downs. In the current WLTP GTR there is already a correction for the air density, but a concrete proposal for relative humidity is available.
4.2 Wind corrections at coast down	Albeit the current WLTP GTR already contains a wind correction further restrictions on side wind and gustiness may be

	necessary. A concrete proposal for gustiness is available
4.3 Road condition of coast down test track (surface roughness, gradient, undulation)	The road surface of the test track seems to have a significant influence. It should therefore be envisaged to either require a minimum road "roughness" or to correct road loads measured at a given test track against a "standard" road surface. However, the investigation of relevant roughness parameters and "standard" road surface values is quite complex. Outside timeframe of this project.
5.2 Rotational inertia correction (when evaluating the coast down test)	The suggested correction is very simple to implement and provides a more accurate result for CO ₂ emissions.
6.1 Tyre rolling resistance	The rolling resistance of the test tyre might deviate from the class value. The suggested correction is very simple to implement and provides a more accurate result for CO ₂ emissions, but depends on the availability of the actual rolling resistance value of the test tyre. Outside timeframe of this project.
7.1 Movable body parts, in particular grill vanes	Positions of movable body parts, in particular grill vanes, have a significant influence on the vehicle air drag. Their position during coast down might deviate from the position in normal use. The suggested correction is very simple to implement.

The correction methods are summarised below. A detailed description of the methods and test results is provided in the main report.

Correction algorithms for chassis dynamometer tests in WLTP

Correction methods for several flexibilities existing in chassis dynamometer tests have been elaborated and the influence on the resulting CO₂ emissions has been assessed where possible. For the corrections which have reasonable influence on the results and which are already developed to an applicable draft procedure the amendments in the WLTP necessary for their implementation are drafted in Annex G. These are:

- A draft for the amendments to implement a correction for deviations against the target velocity and the target test distance (Annex G.1).
- A draft for the amendments to define the procedure for adjustments in the road load more precisely (Annex G.2).

All flexibilities analysed are summarised below. More detailed information is given for each correction function in the corresponding chapters of the report.

Vehicle specific CO₂ linear equation ("Veline"): Several of the correction functions need to adapt the measured CO₂ value from the work delivered during the test to the target work which would have been necessary without flexibilities. These corrections need a specific CO₂ emission coefficient in [g/kWh]. This coefficient is not based on the average engine efficiency in the test cycle but represents the

additional fuel flow (CO₂ emissions) due to an additional engine power demand. Thus in this coefficient those parasitic losses which are not affected by changes in engine power are not considered, since these have to be overcome in any case. This emission coefficient is called in this report the “Veline coefficient”. It can be computed from the chassis dynamometer tests from the four phases of the WLTC by plotting the average CO₂ flow [g/s] over the average power of the phase as shown in Figure 1. The regression line gives the “Veline equation”, where the inclination coefficient “k” of the equation gives the average Veline coefficient. In the equation the parasitic losses are represented by the constant “D” in the equation, which gives the CO₂ emissions (or the fuel consumption (FC), if FC is plotted instead of CO₂) at zero power output³.

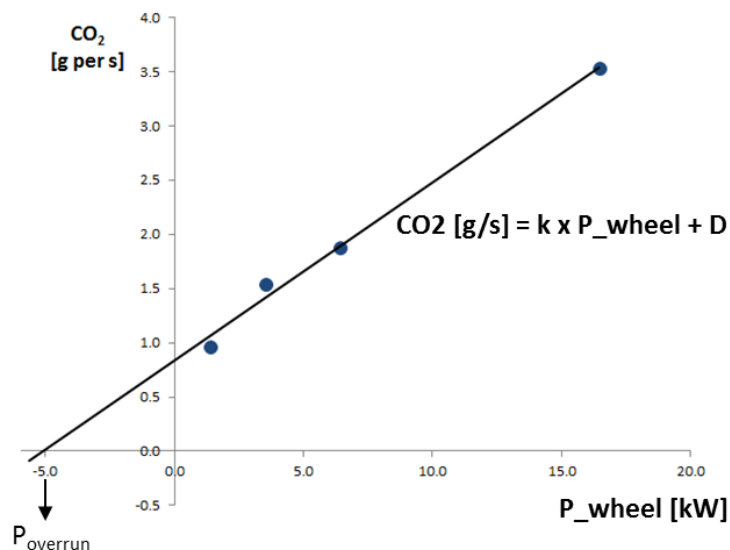


Figure 1: Schematic picture of setting up the Veline for a LDV from the chassis dyno test

The Veline equation gives the CO₂ flow as a function of the power at the wheel. The Veline coefficient from this equation is suitable to correct all parameters leading to deviations of the work at the wheel against target settings (results from speed deviations and from road load settings)⁴. To gain the engine Willans coefficient⁵ the Veline coefficient would have to be translated to the engine power, which is higher than the wheel power due to the losses in the transmission system in case of positive power output. The losses in the transmission system are not measured in the test and each WLTC phase has different engine speed levels. Thus the engine Willans lines cannot be computed exactly from the Velines and a conversion would add reasonable uncertainties to the engine Willans coefficient. Therefore it seems to be more practical to use directly generic engine Willans coefficients for all

³ Typically the regression line of the average engine speed per WLTC phase over average power crosses the zero power line at engine speeds clearly above idling speed. Thus the constant value “D” in the linear equation represents the CO₂ emission value for idling at increased rpm.

⁴ All corrections based on the Veline coefficients [g/kWh] can either be based on the change in power to provide the average change in fuel flow [g/s] or by change in work over the cycle to provide the absolute change in fuel consumption over the cycle [g]. Both methods deliver identical results.

⁵ The engine Willans lines are defined as functions providing the fuel flow or CO₂ emissions of the engine as function of the engine power at constant engine speed values.

corrections which are based on deviations of the engine power over the cycle. This option is already applied in the actual WLTP for correction of SOC imbalances of the battery.

Below an overview on potential correction functions is given which partially make use of the vehicle specific Veline or the generic engine related Willans coefficient.

Imbalance in battery SOC can influence the test result up to approx. 2 g/km in the WLTC. A correction for SOC imbalances is suggested to be based on generic coefficients for the change in fuel flow per change in average power demand over the cycle ("engine Willans coefficient") combined with a generic average alternator efficiency as already outlined in the WLTP. More detailed approaches have been investigated at TUG but do not show significant improvements in the reliability of the correction (Leitner, 2014). This gives the following equation for the suggested correction:

$W_{bat} = \int U_{(t)} * I_{(t)} * 0.001 \, dt$ in [kWs] where the Voltage could be the nominal Voltage or the measured one. The Current flow has to be measured at the battery with positive sign for energy flows from the battery.

$$\Delta CO_{2SOC} [g] = \frac{W_{bat}}{\eta} * k_e$$

With k_e Engine Willans coefficient [g_{CO_2}/kWs], generic values per technology

η Generic average efficiency of the alternator including transmission losses to the engine (in the WLTP draft an efficiency of 0.67 is suggested)

The correction shall be done for each WLTC phase separately, if a more accurate base shall be provided for setting up the vehicle specific Veline functions from the SOC corrected WLTP results. This is more relevant, if the test is started with low SOC since the vehicle then tends to load the battery from start on, which influences mainly the first test phase. In type approval the defined pre-conditioning and the limits for the SOC imbalance should allow only small influences on the CO_2 emissions per test phase. Thus the SOC correction may be applied to the entire WLTC and not per phase.

Deviation against target road load: As the basis for a correction, a set of 3 coast down tests⁶ shall be performed directly after the WLTC. The tests with the highest and the shortest coast down time shall be rejected and the remaining test shall be evaluated according to the WLTP regulation⁷ to determine the road load coefficients. For the time being it is assumed that the coast down after the WLTC test shall be representative for the road loads applied by the chassis dynamometer during the test. The correction can be done separately or preferably should be combined with the correction for deviations against the target speed.

⁶ The exact number may need further discussion. Alternatively just one test after WLTC can be made, if we do not expect outliers, see chapter 2.7.

⁷ for the coast down test evaluation on the test track

A separate correction for the road load would work as follows:

The actual wheel power for the road load coefficients from the chassis dynamometer coast down test has to be calculated from the vehicle speed and acceleration and has to be compared against the wheel power from the target road load values.

The time resolution of the speed signal shall be at minimum 5 Hz. The velocity and acceleration shall be calculated as follows:

$$a_{(j)} = (v_{(i+1)} - v_{(i)}) / (t_{(i+1)} - t_{(i)})$$

$$v_{(j)} = (v_{(i+1)} + v_{(i)}) * 0.5 \quad (\text{velocity measured in the WLTC})$$

with i original reading of the velocity in $\geq 5\text{Hz}$

j transformed time steps

The instantaneous power is calculated from the measured road load coefficients as follows:

$$P_{(j)} = (R_0 + R_1 * v_{(j)} + R_2 * v_{(j)}^2 + m * a_{(j)}) * v_{(j)}$$

The instantaneous power is calculated from the target road load coefficients as follows:

$$P_{p(j)} = (R_{0w} + R_{1w} * v_{(j)} + R_{2w} * v_{(j)}^2 + m * a_{(j)}) * v_{(j)}$$

with R_0, R_1, R_2 Road load from the coast down tests at the chassis dynamometer directly after the WLTC in [N], [N*s/m] and [N*s²/m²]

R_{0w}, R_{1w}, R_{2w} Target road load coefficients in [N], [N*s/m] and [N*s²/m²]

Then the average power values over the WLTC are computed

$$\bar{P} = \frac{\sum_{j=1}^n P(j)}{n}$$

$$\bar{P}_p = \frac{\sum_{j=1}^n P_p(j)}{n}$$

with n number of time steps in the WLTC recording

Consequently the total work at wheels is calculated:

$$\Delta W_{wheel} = 1.8 * (\bar{P}_p - \bar{P}) \text{ in [kWs]}$$

Then the vehicle based Veline function is applied to correct for the deviation against the work from the WLTC target velocity:

$$\Delta CO_{2p} [g] = \Delta W_{wheel} * k_v$$

with k_v Vehicle Veline coefficient [gCO₂/kWs] from WLTP

If the road load correction is applied it is suggested to combine it with the correction for target speed deviations as described later in this summary.

Remark: The coast-down tests after the WLTC are assumed to have a similar uncertainty in representing the road load during the test as the coast downs during the chassis dynamometer calibration procedure. Thus instead of correcting for deviations in the road load as described above, a more precise procedure for the chassis dynamometer road load calibration could be applied. If the tolerances in the road load simulated are low, the correction is assumed not to be necessary since then the effect of the correction would be very small. For both options it is essential

that the number of coast down tests as well as the space of time between vehicle driving and each subsequent coast down test is defined in detail. Otherwise the temperatures of tyres and bearings will change (drop over time) and lead to different road load values than those in the test procedure. For a precisely defined procedure for the chassis dynamometer road load calibration the total number of coast downs shall be defined exactly and also the space of time between the coast downs has to be defined (suggested that this be amended in Annex 4 in WLTP, e.g. para 8.1.3.2.1). For calibration of the road load settings, a maximum number of 5 coast down seems to be reasonable, with a maximum of 3 minutes between the vehicle warm and the first coast down and also a maximum of 3 minutes between the end of a coast down and the start of the subsequent coast down.

Deviation against target speed: the driven speed profile as well as for the target speed the power at wheels is computed. If combined with the correction for road load deviations, the power for the speed driven in the WLTC is calculated from the road load coefficients gained from the coast down after the WLTC test as described above:

$$P_{(j)} = (R_0 + R_1 \cdot v_{(j)} + R_2 \cdot v_{(j)}^2 + m \cdot a_{(j)}) \cdot v_{(j)}$$

where $v_{(j)}$ is the velocity driven in [m/s]

$$P_{w(t)} = (R_{0-w} + R_{1-w} \cdot v_{w(j)} + R_{2-w} \cdot v_{w(j)}^2 + m \cdot a_{w(j)}) \cdot v_{w(j)}$$

where v_w is the target velocity of the WLTC

As described for the road load correction, the time resolution of the speed signal shall be at minimum 5 Hz. The velocity and acceleration shall be calculated as described before.

Then the difference in the average of the power signals above P_{overrun} is calculated.

if $P(j) < P_{\text{overrun}}$ then $P(j) = P_{\text{overrun}}$

if $P_w(j) < P_{\text{overrun}}$ then $P_w(j) = P_{\text{overrun}}$

$$\bar{P} = \frac{\sum_{j=1}^n P(j)}{n}$$

$$\bar{P}_w = \frac{\sum_{j=1}^n P_w(j)}{n}$$

with n number of transformed time steps ($n = i-1$)

The deviation against the target cycle work is then:

$$\Delta W_{\text{wheel}} = 1.8 \times (\bar{P}_w - \bar{P}) \text{ in [kWs]}$$

Then the vehicle based Veline function is applied to correct for deviations against the work from the WLTC target velocity

$$\Delta CO_{2v} [g] = \Delta W_{\text{wheel}} \cdot k_v$$

With k_v Vehicle Veline coefficient [gCO_2/kWs] from WLTP result after SOC correction

The correction for deviations against target speed covers the time shares in WLTP with wheel power above " P_{overrun} ", as shown in Figure 1. Thus in these time intervals the power is shifted to the power necessary to meet the target velocity.

Nevertheless, by braking less or more aggressively than the target decelerations, the distance can be varied by the driver with only small effects on the total WLTC fuel consumption [g], since in these phases the engine is generally in overrun at zero fuel flow. Thus dividing the entire fuel consumption in the test (in [g]) by the target distance of the WLTC gives a result without effects from braking behaviour of the driver:

$$CO_2[g/km] = \frac{CO_{2measured} + \Delta CO_{2SOC} + \Delta CO_{2v}}{23.27}$$

With $CO_{2measured}$ CO_2 test result in the WLTP in [g/test]
 23.27 WLT target test distance [km]

The driver can influence the resulting CO_2 emissions in the WLTC by more than 2% within the given speed tolerances. Thus a correction for deviations against the target speed is suggested to improve the repeatability and the reproducibility of test results.

Deviation against target soak temperature: the WLTP prescribes a soak temperature of $23^\circ C \pm 3^\circ C$. These rather narrow tolerances will not lead to deviations in the CO_2 emissions measured of more than approx. $\pm 0.6\%$. If the oil temperature at test start is measured with reasonable accuracy a correction of this influence may be reasonable.

A linear equation for the small temperature range seems to be the best option:

$$\Delta CO_{2t} = (23 - t) * C_T$$

With: C_T Coefficient for soak temperature correction (average from measurements: $C_T = 0.0018/^\circ C$)

$$CO_2 \left[\frac{g}{km} \right] = CO_{2measured} \left[\frac{g}{km} \right] \times (1 + \Delta CO_2)$$

An accurate assessment of the oil temperature would need an additional sensor in the test procedure, a precise definition of a representative point of measurement and a definition of the accuracy of the temperature sensors. Since the effect of the temperature correction is rather small a mandatory correction of the soak temperature seems not to be very attractive.

The order of correction steps is outlined below as a suggestion from TUG. Which corrections shall be implemented in type approval needs further discussion in the relevant expert groups. The main questions are whether the effort is balanced with the improvement in accuracy and whether the quality of input data is sufficient to apply the correction⁸.

1) Perform the WLTP test

Measured values_necessary for application of the correction functions: CO_2 [g], distance [km], ΔSOC [kWh], instantaneous velocity with ≥ 5 Hz [km/h] to compute average P_{wheel} [kW] per phase.

⁸ the accuracy of the sensor signals should be approx. an order of magnitude higher than the tolerances which shall be corrected (e.g. $< \pm 0.2^\circ C$ sensor accuracy for a correction of $\pm 3^\circ C$; to be discussed.

For application of the correction for road load deviations also a set of 3 coast down tests directly after the WLTC would be required.

- 2) Correct test results for imbalances in battery SOC
- 3) Set up a vehicle specific Veline function from the SOC-corrected WLTC test data
- 4) Optional: Correct for deviation against target road load settings (can be combined with 5)) or use a more precise definition in the WLTP for the road load calibration on the chassis dynamometer
- 5) Correct for deviation against target speed and distance

Further options for correction, where either the effect is small or where still open questions exist, are:

- Correct for deviation against target soak temperature (this would need an extra temperature sensor and a defined measurement position for lube oil temperature);
- Intake air temperature and humidity; and
- Quality of the test fuel.

Details relating to the development of the correction functions and their application on chassis dyno test data are provided in the main report.

WLTP coast down test procedure

Rotational inertia correction: Currently 3% of the reference mass is assumed to be rotating inertia. This is at the lower end of the actual rotating inertia. Weighing the wheels and tyres and using 60% of the weight as rotational inertia yields a more appropriate result for the rotating inertia. Special care must be taken to compensate for the use of other, special wheels on the chassis dynamometer.

WLTP text proposal: The rotating inertia at the coast down test and the chassis dynamometer test are to be determined by weighing the wheels and tyres. 60% of the weight of all tyres and wheels is the rotating inertia to be used. Different weights between the coast down test and chassis dynamometer test due to special tyres or wheels to be used, e.g., to avoid slip on the drum of the dynamometer, must be compensated for by adjusting the chassis dynamometer settings.

Relative humidity: Humid air is lighter than dry air at the same ambient pressure. This will affect the air drag during coast-down testing. The density of air should be compensated not only for pressure but also for water vapour content. This is especially relevant when coast-down test is undertaken at higher temperatures.

WLTP text proposal: The air-drag must be compensated for the deviation of the air density. The air density is proportional with pressure p and inversely proportional with temperature T , such that the observed air drag is compensated with factor $(100/p) \cdot (T/300)$. Furthermore, the air drag must be compensated for the presence of water vapour through a factor: $1 + 0.37 \cdot P_{\text{vapour}} / P_{\text{ambient}}$, assuming the standard condition is dry air.

Rolling resistance coefficients: The rolling resistance coefficient of the tyre may not be a very accurate result, but it is the best available value to correct coast-down tests with different tyres. The rolling resistance should be corrected by the ratio of the class value, as described in the GTR text, and the actual test tyre value.

WLTP text proposal: The rolling resistance, measured according R 117, of the tyre used from the prescribed tyre class must be corrected back to the class value from the table:

$$F0_{corrected} = F0_{test} * RRC_{class}/RRC_{test}$$

Tyre pressure during coast-down testing: The preconditioning prior to the coast-down test increases the tyre pressure. However, a large range in the tyre pressures remains. In part this range is due to the test execution: intermediate driving, braking, bends, etc., whilst it is also due in part to local conditions, such as sunlight, precipitation, road surface temperature, etc. A third cause for the range is the design of tyres and wheels, and the radiative heat from the engine on the tyres. Some limitations are appropriate on the tyre pressure during coast down testing. For this the tyre pressure must be monitored.

WLTP text proposal: The tyre pressure during the test is increased due the precondition. This pressure increase must be appropriate for the preconditioning driving. The during the test moderate driving, limited braking and limited exposure of the tyres to heat must be maintained.

Or a more strict approach to the type-pressure variations:

WLTP text proposal: Tyre pressures should be monitored during the coast-down testing. Tyre pressures should remain in a normal range, for the prescribed precondition, with a maximal bandwidth of 6%.

Wind gusts: Wind gusts are common in all weather conditions except for completely 'wind still' weather (i.e., < 1.0 m/s wind speed). They are a major source of uncertainty in the coast down test results. In the time scale of "a" and "b" (forward and backward) tests the variation due to wind gusts cannot be controlled. Hence, measurement of the wind in conjunction with the timeline of the test execution should be reported to ensure wind gust can be identified as a cause for anomalous results. A proper on-board anemometry, small enough not to affect the test, synchronized with the velocity data could yield a robust correction method.

WLTP text proposal: The wind velocity during the test must be measured and reported for regular intervals together with the timing of the test execution. Large time intervals in the test execution should not be correlated with wind gusts.

Road surface roughness: The variation in road surface roughness, in particular the mean profile depth (MPD), yields a significant variation in rolling resistance. It is currently unclear what would be an appropriate surface roughness representative for Europe. However, it is expected to be in the order of MPD ~ 1.5. Coast down testing on test tracks with MPD of 1.0 or less should be corrected for. VTI made a systematic study of the effect of MPD on rolling resistance. Their formula seems to be the best available means for globally correcting for testing on smooth road surfaces.

WLTP text proposal: The road surface of the test track must have a texture, expressed in the mean profile depth, comparable to normal European tarmac roads. If the mean profile depth of the test track is substantially lower, an appropriate correction of the rolling resistance must be applied. If the mean profile depth (MPD) is below 1.0, the best available method is the correction based on the different findings of VTI in Sweden. If MPD < 1.0 of the test track, the rolling resistance is to be corrected:

$$F0 = F0_{test} (1 + 0.20 (1.0 - MPD))$$

$$F1 = F1_{test} (1 + 0.20 (1.0 - MPD))$$

Wheel alignment: The typical toe-in and camber of the wheels, to improve vehicle dynamics, has a negative effect on the rolling resistance. The effect can be significant. If the manufacturer allows for a range of angles of the wheel alignment, the maximal deviation of the wheels from parallel settings should be used in the coast-down test, as a worst case setting. Preferably wheel alignment should be provided as an optimal setting, rather than a range. The latter prescription will remove any flexibility regarding wheel alignment variations.

WLTP text proposal: The alignment of the wheels: toe-in and camber, should be set to the maximal deviation from the parallel positions in the range of angles defined by the manufacturer. If a manufacturer specifies an optimal value, with a tolerance, this value may be used.

Open settings: The grill vanes have a major effect on the air drag. It is difficult to control the settings during testing. The most open settings are should be considered if no data on operation and effects are available. Hence the grill-vane control should be disabled and the vanes should be set in the most open setting. Likewise, for all movable body parts with a possible flow through, the most open setting seems most appropriate for the coast down test. Also, open wheel caps are considered the most appropriate worst case choice for the coast-down test. With the lack of information on the variation of vane settings during normal driving, this worst case setting should be considered. Normal operation of a vehicle may very well include, the unwanted, setting of “closed grill during coasting and sailing”. In that respect, coast-down is not normal operation. The normal driving at the same velocities should be considered for the normal settings.

WLTP text proposal: The aerodynamic drag is closest to worst case with the maximal flow through the vehicle body parts. Hence, the most open settings and design should be used during coast-down testing. In particular, grill vanes should be fully open to allow for the maximal flow through the radiator. If detailed information of vane operation during normal operation can be provided, these settings may be used instead.

WLTP GTR text

This investigation was carried out in the period September 2013 till September 2014. The tests were executed against the consolidated draft gtr texts at the time. Furthermore, the names and definitions in the report were based on this text. The initial draft at the start of the project was: UNECE: WLTP text ECE/ TRANS/ WP.29/ GRPE/ 2013/ 13 (17 September 2013). During the year, many changes were recommended and a few drafts appeared, at different stages of consolidation. The authors followed this complex process to keep the draft reports as up-to-date as possible.

1 Introduction

TUG and TNO investigated in this study the flexibilities in the type approval test procedure, which may lead to a variation in the type-approval CO₂ emission. Any effect which could lead to 1 g/km change in type-approval value, within the margins of the test protocol is considered. Some effects were under closer investigation smaller and excluded from report. Other effects, which cannot be corrected for, or properly quantified, are mentioned without explicit means for removing the flexibilities. Within the project, TUG was in the lead to investigate chassis dynamometer tests, while TNO investigated the coast-down testing.

Type-approval testing of passenger cars and light-duty vehicles will have to allow for certain margins. The measurement equipment may have a limited accuracy. The settings of the testing equipment can be stepwise, not allowing for a very precise value setting. Furthermore, one should allow for margins for the operator driving the vehicle in the coast-down test and on the chassis dynamometer. An operator can follow a prescribed velocity profile only with a finite accuracy. Moreover, not all aspects of the vehicle can be specified or controlled during the test, yet they may influence the outcome. For example, the battery state of charge will vary during the test, with an associated energy buffering or discharging. Finally, ambient conditions, such as temperature, wind, and sun cannot be controlled, especially during the coast-down test.

Some corrections, for the variations in the test, are already part of the WLTP. This study will investigate additional corrections to the main test variations expected to affect the test results. It has been recognized, the correction algorithms may not only serve to correct towards a normalizing the test, but also towards the average European conditions on the road. In principle, the corrections methods recommended in the report can be used to correct from the test result to the average European situation on the road, such as for wind, temperature, and road surface. There are some restrictions on how much can be corrected for, mainly from the lack of useful and accurate data on the situation at hand. Furthermore, this study focused on the bandwidths in the WLTP; in many cases, such as temperature and road surface, average European conditions lie outside this bandwidth, and were not validated.

Recovering the important test variations and the resulting corrections are typically based on physical principles. The consequent corrections are typically robust for extreme cases. Correction methods solely based on test data may yield corrections for situations outside the range of test data which incorrect. Polynomial fits of arbitrary order typically leads to such non-robust methods. The main physical concepts underlying coast-down testing are inertia and friction. Inertia can be divided into weight and rotation inertia. Friction can be divided into tyre friction, driveline friction, and air drag. In the following chapters these physical concepts broken down into the smallest aspects that can be quantified. However, the set-up of the report follows the underlying physical principles.

Separate from the build-up from physical concepts are the variations that affect each of these parts. For example the ambient temperature will affect the air drag through air density and air viscosity. However, it will also affect the tyre temperature and tyre pressure. Moreover, it will affect the lubricant properties through its temperature. Also, ambient temperature is not as simple a concept as initially seen.

The air temperature and the road surface temperature are two different things, both affecting the test independently. Also, sunlight can lead to a higher temperature of dark surfaces than the ambient temperature. On the contrary also a clear sky can yield excessive radiative heat losses of, in particular, metal surfaces, yielding a lower surface temperature than the ambient temperature. Following this train of thought, the testing for variations in conditions will become infinitely complex, and rather academic than pragmatic. In order to avoid this a few essential measurements are suggested to determine the net effect of all these complex processes.

Hence, the required measurements, suggested in this study, are meant to be the simple intermediate between a complex circumstances and their direct influence. In essence from all the conditions, the properties are recovered and quantified that directly affect the test. If that is not possible, direct measurement of this property is proposed.

For example, the case of the complexity of temperature as explained above and tyre pressure, it is not possible to achieve a fixed and repeatable tyre pressure, during the coast-down, from the ambient conditions and the warm-up procedure. Since tyre pressure affects to outcome of the coast-down test greatly, it is essential the pressure is properly monitored just before and after the test, minimally, and possibly in between if the test spans several hours.

1.1 Chassis dynamometer testing

The definition of a test cycle, such as the WLTP, allows for test parameters a certain degree of flexibility by specifying a set value and margins for allowed deviations, such as for the driving speed, ambient temperature/humidity, simulated road load, etc. Some flexibility has to be allowed to perform a test under practical laboratory conditions, but since several of the parameters to which a flexibility is allowed influence the resulting fuel consumption in the test, the introduction of CO₂ limit values would make it possible for manufacturers to run tests at the more advantageous edge of the allowed tolerances to obtain lower CO₂ emission results.

This certainly does not change real world CO₂ emissions of vehicles and just adds burden for the manufacturer to design test procedures and to train drivers to obtain the best CO₂ results within the given flexibilities.

In this study the influence of parameters which have flexibilities in the chassis dynamometer test procedure have been analysed for their impact on the fuel consumption in the future WLTP test procedure. For parameters with noticeable influence, correction algorithms have been elaborated which to a large extent eliminate effects from deviations against the target settings of the test procedure. The main parameters which can be corrected are:

- Imbalances in the State Of Charge of the battery before and after the test (ΔSOC)
- Deviations in oil temperature at test start against the target soak temperature (ΔT)
- Deviations against the target speed of the WLTC (Δv)
- Deviations against the target distance of the cycle (ΔD)
- Deviations against the target road load from the coast down [ΔP]

For each of these parameters correction functions have been proposed. The correction functions have been applied on chassis dyno test data from four passenger cars to test the efficiency of the correction. The repeatability shall increase and incentives to optimise test runs within the flexibilities shall be drastically reduced, if the correction functions were to be applied in future test procedures.

Additional parameters are analysed in this report but it was found that they have a low influence on the results and/or the accuracy of sensors is not sufficient and/or the significance of possible correction algorithms is too low to increase the accuracy of the test result when the correction is applied.

The approach for the work was based on the corrections developed by the EU for the future MAC energy efficiency test procedure (MAC 2011).

1.2 The physical principles of coast down testing

The coast-down test is performed to determine the forces needed to propel the vehicle forward at a certain velocity. This information is needed for the chassis dynamometer test of the emissions in the laboratory.

The simplest way to determine the resistance forces of the vehicle is to let it roll. Newton already noted that due to its weight the vehicle wants to stay in motion, the resistance slows it down. The balance between its weight, and the rate of slowing down gives the resistance:

$$F_{\text{resistance}} = M \Delta v / \Delta t$$

Where M is the weight, and Δv and Δt are the change in velocity and the time interval. The heavier the vehicle, the longer it takes to slow down. The higher the resistance $F_{\text{resistance}}$ the faster the vehicle slows down.

There are other methods to determine the resistance of the vehicle, however quite often they are either interfering with the 'free and independent' operation, or they are determined indirectly from separate measurements. The viable alternative mentioned in the WLTP text is the use of a torque meter, to determine the amount of power exerted by the engine to retain a constant velocity.

The sources of vehicle resistance are important to determine the soundness of the coast-down test protocol. The total resistance F can be decomposed into two major parts: the rolling resistance, dominated by the rolling resistance of the tyres, but with other minor contributions like drive-train losses; and the air drag of the vehicle. The rolling resistance is dominant at low velocities and the air drag is dominant at higher velocities. The rolling resistance is more or less proportional with the weight of the vehicles, while the air drag is globally proportional with the frontal surface area and vehicle speed squared. However, the drag coefficient c_D can vary substantially with the actual vehicle shape. The generic form of the resistance is therefore:

$$F_{\text{resistance}} = g * RRC * M + \frac{1}{2} \rho v^2 c_D A$$

Where $g = 9.81 \text{ [m/s}^2\text{]}$ the gravity, RRC the rolling resistance coefficient, M the vehicle weight [kg], ρ the air density [kg/m³], and A the frontal area [m²].

This generic form of the resistance has no linear dependency to vehicle speed. In practice an extra term linear to speed is needed to explain (fit) the observed coast down results. This extra term can be positive or negative for different vehicles,

indicating that there is no clear physical principle linked to F1. In EPA certification data of 2013 10% of the linear term (F1) in the equation below is negative.

$$F_{\text{resistance}} = F_0 + F_1 v + F_2 v^2$$

where F0, F1, and F2 are determined from testing. The association of F0 and F1 with rolling resistance and F2 with air drag is only generic.

In this report the effects of the conditions which influence the road load determination are analysed. The global diagram of the aspects affecting the road load, or total resistance, are given in Figure 2.

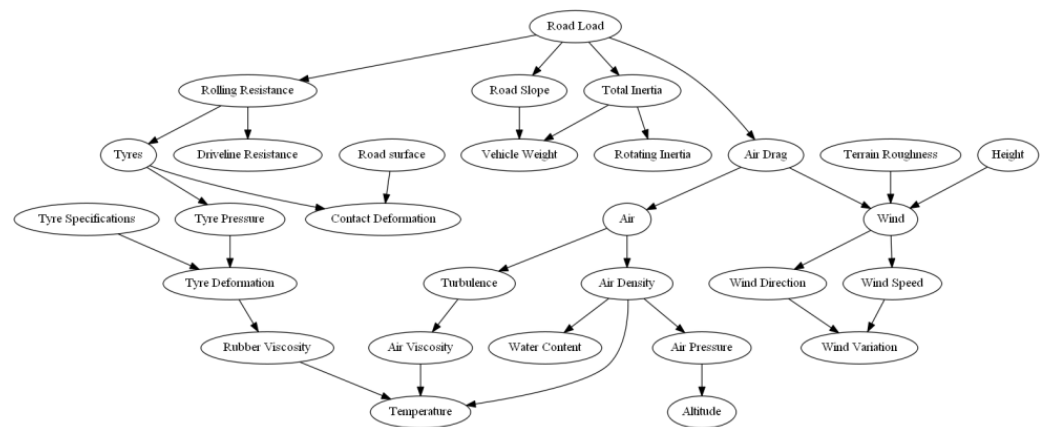


Figure 2: Global separation of conditions which affect the coast-down test results.

2 Correction algorithms for chassis dynamometer tests in WLTP

In the following section, the influence on the CO₂ test result in the WLTP for different parameters is assessed and options to correct for deviations of the parameter values against the WLTP targets are discussed. For each parameter a recommendation is provided as to whether or not a correction should be applied. For the parameters where a correction is recommended, the suggested correction algorithm is provided. The parameters have been identified in the beginning of the project.

2.1 Calculation of the vehicle specific Veline equation

Several options to set up the vehicle specific Veline exist. One may correlate CO₂ and power based on instantaneous test data and separate positive and negative power values. If necessary the data may even be used to set up separate Veline per phase of the WLTC. Nevertheless the most stable approach for a type approval procedure seems to be the use of the bag data for CO₂ of the 4 WLTP phases and correlate them to the average power at the wheel in each corresponding phase with an equation of least square deviation.

It remains open as to whether the target road load values or the road load coefficients from the coast down after the WLTP should be used in this equation. If the road load calibration procedure is defined more precisely in the WLTP in future, as suggested in the overview chapter at the beginning of the report, the target road load values could be used. Otherwise coast down tests directly after the WLTP shall be performed as the basis for a later correction of road load deviations. Consequently, also the road loads calculated from these additional coast down tests should be used to compute the Veline.

The SOC correction (see chapter 2.5) is done on a phase per phase level, then the correction shall be applied before setting up the Veline to eliminate possibly existing unequal imbalances between the phases which typically reduce the R² of the regression line.

Figure 3 shows the different options analyzed here to set up the vehicle Veline from a WLTP test. Using 1 Hz CO₂ test data is just for illustration and not recommended. Splitting the power range into positive and negative power values before calculating the linear regression gives slightly different Veline coefficients than just using the average power values per WLTP phase (0.188 g/kWs versus 0.192 g/kWs in Figure 3). Since splitting the power values would need to handle the instantaneous test data accurately, it is suggested to apply the simple option based on CO₂ bag data per WLTP phase and the corresponding average power above the “P_{overrun}” at the wheel per phase.

The average power shall be computed by the measured vehicle velocity and the road load values as follows:

$$P_{(j)} = (R_0 + R_1 \cdot v_{(j)} + R_2 \cdot v_{(j)}^2 + m \cdot a_{(j)}) \cdot v_{(j)}$$

with $v_{(j)}$ is velocity driven in [m/s].

The velocity and acceleration shall be calculated as follows:

$$a_{(j)} = (v_{(i+1)} - v_{(i)}) / (t_{(i+1)} - t_{(i)})$$

$$v_{(j)} = (v_{(i+1)} + v_{(i)}) * 0.5$$

with i original reading of the velocity in $\geq 5\text{Hz}$

j transformed time steps

Then the average of the power signals above P_{overrun} is calculated per test phase.

P_{overrun} can be defined as generic function (P_{overrun} calculated = $-0.02 \times P_{\text{rated}}$). More accurate results are achieved if based on this generic start value the P_{overrun} value is adapted by one iteration step (resulting cut point with the x-axis from the Veline based on the the generic P_{overrun} is used as vehicle specific P_{overrun}).

if $P(j) < P_{\text{overrun}}$ then $P(j) = P_{\text{overrun}}$

if $P_W(j) < P_{\text{overrun}}$ then $P_W(j) = P_{\text{overrun}}$

$$\bar{P}_{\text{wheel}_i} = \frac{\sum_{j=1}^{n_i} P(j)}{n_i}$$

with n_iNumber of transformed time steps ($n = i-1$) in a WLTP phase "i".

R_0, R_1, R_2 Road load from the coast down tests at the chassis dynamometer directly after the WLTC⁹ in [N], [N*s/m] and [N*s²/m²]

m vehicle mass including also the translated rotational inertia of the wheels [kg]

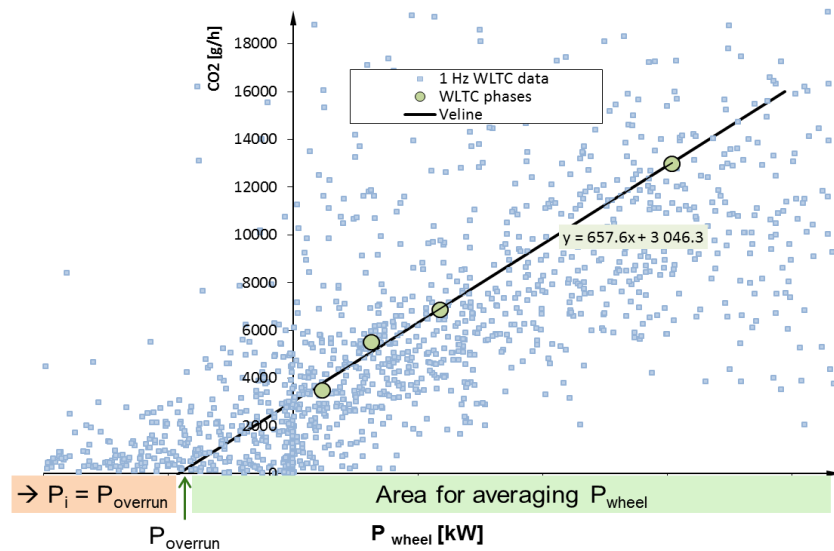


Figure 3: Schematic picture of setting up the Veline equation for a LDV from the chassis dynamometer test (1 Hz data points only plotted for illustration)

⁹ As an alternative the target road load values shall be applied if the road load calibration in the WLTP is described more precisely in future.

The result shall be the Veline equation for CO₂ (similarly for FC if demanded):

$$\text{CO}_2 [\text{g/s}] = k_v * P_{\text{wheel}} + D$$

With:

- D..... Constant representing parasitic losses at engine speed that would result from a regression line with engine speed instead of CO₂ on the y-axis [g/s]
- k_v Vehicle Veline coefficient, giving the change in CO₂ per change of power in the WLTC [g/kWs]
- P_{wheel} power at the wheel hub (sum of driving resistances) [kW]

2.2 Deviation against target speed

Target: Check relevance of deviations against the target speed of the WLTC within the allowed tolerance and develop a method to correct for these deviations.

Method: simulation of effects from generic deviations in the cycle. Development of the correction function based on vehicle Veline coefficient.

Results: reasonable impact (approx. <2%) and reliable correction method seems to be found. Details may need further discussion, such as allowance of “sailing” without correction in these phases and also a combination with correction for deviations in road load simulation (chapter 2.7) with eventual further simplifications. The analysis of the accuracy of relevant sensors suggests an amendment on the velocity sensor accuracy demanded in the WLTP (see chapter 2.10).

2.2.1 Basic approach

Figure 4 shows a simple short part of a cycle with deviations against the target speed which would most likely give lower g/km for CO₂ than the target cycles. The deviation is separated into two different effects

- a) Deviations at wheel power above P_{overrun}. In the example in Figure 4 a too low speed and as a result a too low power occurs.
- b) Deviations at wheel power below P_{overrun}, where in Figure 4 a too long distance was driven at zero fuel flow.

In times with deceleration where the engine runs in overrun and additionally the mechanical brakes are active, small changes in velocity do not change the fuel flow which is zero there. Thus correcting such phases by the Veline function would be incorrect since it would correct here towards a “more negative power” and thus would result in a downward correction of CO₂ if the braking was less aggressive than the target. Since both values are zero in reality such a correction would be wrong. It seems to be clear that a correction by distance would be the correct approach for overrun phases, i.e. that exactly the target distance is driven with zero fuel consumption.

Applying the correction based on the vehicle Veline coefficient to the phases with power above overrun would shift the CO₂-level to the power necessary for following the target speed. If the velocity during positive power is in line with the target velocity the distance is automatically corrected to the target distance. Since also the distance in phases with negative power should be in line with the target distance, we can conclude that after correcting the positive power phases with the Veline

approach the total cycle distance needs to be set to the target distance in calculating the final g/km value.

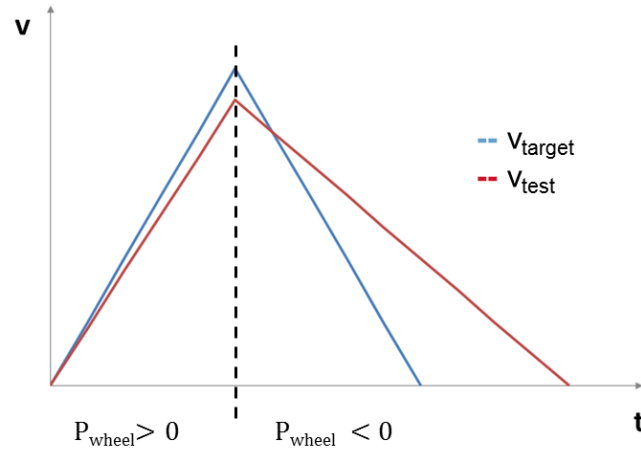


Figure 4: Schematic picture of deviations against target speed

The correction method suggested is as follows:

Calculation of the actual power for the driven vehicle velocity and for the target velocity in the WLTC:

$$P_{(j)} = (R_0 + R_1 \cdot v_{(j)} + R_2 \cdot v_{(j)}^2 + m \cdot a_{(j)}) \cdot v_{(j)}$$

$$P_{w(j)} = (R_0 + R_1 \cdot v_{w(j)} + R_2 \cdot v_{w(j)}^2 + m \cdot a_{w(j)}) \cdot v_{w(j)}$$

with j..... index for time step after the velocity is averaged over 2 time steps as suggested before

v..... velocity driven in test in [m/s]

v_w target velocity of the WLTC in [m/s]

R_0, R_1, R_2 road load coefficients¹⁰ in [N], [N*s/m], [N*s²/m²]

From the vehicle specific Veline the power at zero fuel flow is calculated:

$$P_{overrun} = -\frac{D}{k_v}$$

Then the work with power above $P_{overrun}$ is integrated to calculate the power relevant for the fuel flow:

If $P_{(t)} < P_{overrun}$ then $P_{(t)} = P_{overrun}$

If $P_{w(t)} < P_{overrun}$ then $P_{w(t)} = P_{overrun}$

$P_{overrun}$ has to be set as defined before in the Veline description (chapter 2.1).

$$W_{pos} = \int_1^{1800} P_{(t)} dt \quad \text{and} \quad W_{w-pos} = \int_1^{1800} P_{w(t)} dt$$

Then the difference in the positive cycle work values is calculated¹¹:

¹⁰ If the correction is combined with the correction for deviations in the road load the road load coefficients from the coast down test at the chassis dyno shall be applied for $P_{(t)}$ as outlined in the summary.

¹¹ The steps above can similarly be computed based on average power, as outlined in the summary.

$$\Delta W_{\text{wheel}} = (W_{\text{w_pos}} - W_{\text{pos}}) \times 0.001 \quad \text{in [kWs]}$$

Then the vehicle based Veline function is applied to correct for deviations against the average power from the WLTC target velocity:

$$\Delta CO_{2v} [g] = \Delta W_{\text{wheel}} * k_v$$

with k_v Vehicle Veline coefficient [g_{CO_2}/kWs] from WLTP result after SOC correction.

Deviation against target distance: The correction for deviations against target speed covers the time shares in WLTP with positive wheel power (or power above “ P_{overrun} ”, as shown in Figure 1). Thus in these times the power is shifted to the power necessary to meet the target velocity. Nevertheless, by braking more or less aggressively than the target decelerations, the distance can be varied by the driver without an effect on the total WLTC fuel consumption [g] since in these phases the engine is most of the time in overrun at zero fuel flow. Thus, dividing the entire fuel consumption in the test in [g] after correction for deviations against positive power due to deviations against target speed gives a result without offset from brake behaviour of the driver¹²:

$$CO_2 [g/km] = \frac{CO_{2\text{measured}} + \Delta CO_{2SOC} + \Delta CO_{2v}}{23.27}$$

With $CO_{2\text{measured}}$ CO_2 test result in the WLTP in [g/test]
23.27 WLTC target test distance [km]

2.2.2 Assessment of influence on CO_2

Beside analysing the correction effects on real chassis dyno tests, simulation runs have also been performed to test the possible magnitudes of driver influences, since the drivers at TUG are not yet trained to follow CO_2 optimised WLTC velocities.

Figure 5 shows the target cycle of the WLTC high speed part and a cycle with deviation (lower velocity with longer braking phases). The fuel consumption and CO_2 emissions were simulated with PHEM for a generic EURO 6 diesel class C car from (Hausberger, 2014). The “low CO_2 velocity gave 1.1% lower CO_2 emissions in this phase of the WLTC. Since no routine for the optimisation of the driven velocity for the WLTC exists at TUG yet, no further variations for the entire WLTC have been performed. A magnitude of 1% deviation in CO_2 test result may be used as a first estimation for further discussion of the potential influence of speed optimised driver behaviour.

¹² After correction for deviations of the positive power all time steps that add fuel consumption to the test are corrected towards the target speed. Consequently also a correction towards the target distance was made for these time steps. Therefore the remaining phases without fuel consumption only have to have the target distance to get correct [g/km] results.

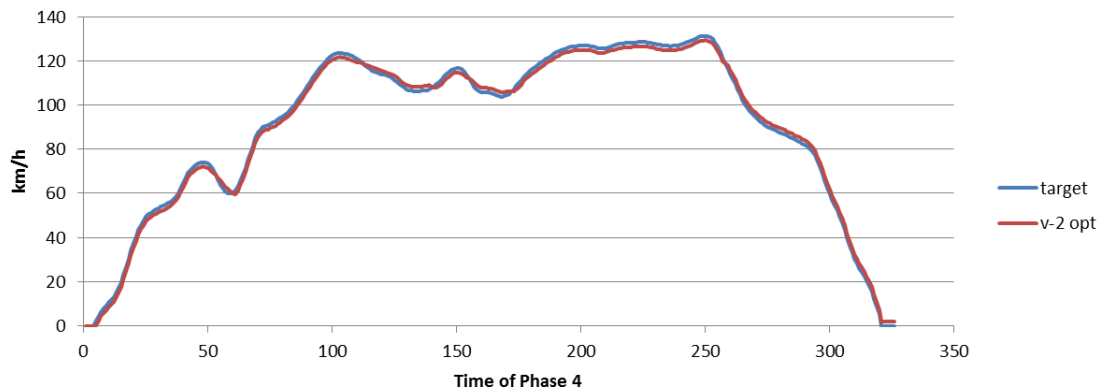


Figure 5: Velocity deviation simulated with the tool PHEM for a class C car with diesel engine

Results from the real tests analysed in Appendix C give a maximum influence of the correction for deviations against target speed of 2.1% for all tests where the velocity met the tolerances. Since the correction function is based on reliable physical principles and also the effect of using the tolerances against the target speed is quite high, the application of this correction is suggested.

A draft for the amendments necessary in the WLTP is given in Annex G.1.

2.3 Quality of reference fuel

Target: Check relevance of variations in the reference fuel properties on the CO₂ emission result and develop options for correction.

Method: The effect on CO₂ emissions computed from the energy specific Carbon content of the fuel [kg_C/kWh]. The analysis of relevance is still open (no information on variability of C/H ratios was found yet for fuels which meet the given ranges for reference fuels).

Results: impact unknown yet. A correction is possible if the C/H ratio and the C/O ratio of the test fuel are known.

2.3.1 Correction method

The CO₂ emissions in the test cycle depend on the energy specific Carbon content of the test fuel in [kg C/kWh]. If the mechanical work of the engine as well as the engine efficiency over the test cycle is seen as fixed value for a given vehicle, the CO₂ emissions result from the oxidation of the Carbon and have the value:

$$CO_2[g] = \frac{W_{w-pos}}{\text{Efficiency}_{Engine}} \times \frac{1}{3600} \times \left(\frac{kg_C}{kWh} \right)_{fuel} \times \frac{44}{12}$$

with W_{w-pos} positive engine work in [kWs] as described before

A correction for fuel properties would thus consequently correct the measured CO₂ value to the energy specific Carbon content of the reference test fuel:

$$\Delta CO_{2f} = \frac{(kg_C/kWh)_{reference}}{(kg_C/kWh)_{test fuel}}$$

The correction factor could be directly applied to the measured CO₂ value where it is irrelevant if the correction is done at the beginning or at the end of all other corrections.

$$CO_2[g/km] = CO_{2_{measured}} \times \Delta CO_{2f}$$

The energy specific Carbon content of the fuel mainly depends on the C/H ratio in the fuel. Driving with pure Hydrogen would result in zero CO₂ emissions while pure Carbon would result in the highest specific CO₂ emissions.

The target fuel quality could be based on the ECE R101 with the H/C ratios mentioned in GTR Annex 3 section 5.2.4 (Table 1). The heating value of liquid fuel may be calculated for liquid fuels according to simplified Thermodynamic Enthalpies, e.g. according to Boie, e.g. (IVT, 2013):

$$H_u = 9.676 \times m\%_C + 26.075 \times m\%_H + 1.744 \times m\%_N - 3.0 \times m\%_O - 0.678 \times m\%_{H_2O}$$

With H_u Lower heating value of the fuel [kWh/kg]

$m\%_i$ mass fraction of component i in the fuel

Table 1: Possible specification for the reference fuel properties

Fuel	Fuel components	C Mass %	H Mass %	O Mass %	Total Mass %	Hu [kWh/kg]	KgCO ₂ / kWh fuel
Source	ECE R101	Calc. from components				calc. Boie	Calc.
Gasoline	C ₁ H _{1.89} O _{0.016}	0.8483	0.1336	0.0181	1.00	11.64	0.267
Diesel	C ₁ H _{1.86} O _{0.016}	0.8501	0.1318	0.0181	1.00	11.61	0.268

Neglecting the usually minor effects of Nitrogen and Water content the energy specific CO₂ value of any liquid fuel could be calculated with known mass fractions of C, H and O. The fuel correction factor – i.e. the energy specific CO₂ value of the reference fuel divided by the energy specific CO₂ value of the test fuel as defined above – can be calculated from:

$$\Delta CO_{2f} = \frac{(kg_C/kWh)_{reference} \times (9.676 \times m\%_C + 26.075 \times m\%_H - 3.0 \times m\%_O)}{m\%_{C_{test\ fuel}}}$$

Although the correction is a simple function, the data relevant for the application of this function seems not to be available from the fuel quality descriptions demanded in type approval for all fuels. Table 2 and Table 3 summarize the actual fuel properties from the WLTP (UN ECE, 2014) for B10 and D7. It seems that for E10 reference fuel the C/H and C/O ratio shall be reported. These ratios would be sufficient to calculate the mass fractions. For B7 and several other fuels the C/H and C/O ratios are not demanded.

The determination of C, H, and N content can be performed by elemental analysis which is based on the following principle: combustion of the sample resulting in CO₂, H₂O and a mixture of N₂ and NO_x. NO_x is further reduced by Cu to N₂. The resulting gases are adsorbed, consecutively desorbed and quantitatively determined by a thermal-conductivity detector.

Oxygen is not covered but can be indirectly determined (if no other hetero-atoms are present in the sample) as 100% - sum of C, H, N. The costs of such measurement seem not to be high, if one test per charge of test fuel delivered by the supplier is demanded.

Table 2: Example for E10 fuel specification for LDV chassis dyno tests from WLTP, Annex 3

3.6. Gasoline/petrol (nominal 95 RON, E10)

Table A3/6

Gasoline/petrol (nominal 95 RON, E10)

Parameter	Unit	Limits ⁽¹⁾		Test method ⁽²⁾
		Minimum	Maximum	
Research octane number, RON ⁽³⁾		95.0	98.0	EN ISO 5164
Motor octane number, MON ⁽³⁾		85.0		EN ISO 5163
Density at 15 °C	kg/m ³	743	756	EN ISO 12185
Vapour pressure	kPa	56.0	60.0	EN 13016-1
Water content	% v/v	max 0.05 Appearance at -7°C: clear and bright		EN 12937
Distillation:				
— evaporated at 70 °C	% v/v	34.0	44.0	EN-ISO 3405
— evaporated at 100 °C	% v/v	54.0	60.0	EN-ISO 3405
— evaporated at 150 °C	% v/v	86.0	90.0	EN-ISO 3405
— final boiling point	°C	170	210	EN-ISO 3405
Residue	% v/v		2.0	EN-ISO 3405
Hydrocarbon analysis:				
— olefins	% v/v	6.0	13.0	
— aromatics	% v/v	25.0	35.0	EN 22854
— benzene	% v/v		1.0	EN 22854 EN 238
— saturates	% v/v	Report		EN 22854
Carbon/hydrogen ratio		Report		
Carbon/oxygen ratio		Report		
Induction period ⁽⁴⁾	minutes	480		EN-ISO 7536
Oxygen content ⁽⁵⁾	% m/m	3.3	3.7	EN 22854
Solvent washed gum (Existent gum content)	mg/100ml		4	EN-ISO 6246
Sulphur content ⁽⁶⁾	mg/kg		10	EN ISO 20846 EN ISO 20884
Copper corrosion			Class 1	EN-ISO 2160
Lead content	mg/l		5	EN 237
Phosphorus content ⁽⁷⁾	mg/l		1.3	ASTM D 3231
Ethanol ⁽⁵⁾	% v/v	9.0	10.0	EN 22854

- (1) The values quoted in the specifications are 'true values'. In establishment of their limit values the terms of ISO 4259 Petroleum products - Determination and application of precision data in relation to methods of test have been applied and in fixing a minimum value, a minimum difference of 2R above zero has been taken into account; in fixing a maximum and minimum value, the minimum difference is 4R (R = reproducibility). Notwithstanding this measure, which is necessary for technical reasons, the manufacturer of fuels shall nevertheless aim at a zero value where the stipulated maximum value is 2R and at the mean value in the case of quotations of maximum and minimum limits. Should it be necessary to clarify whether a fuel meets the requirements of the specifications, the terms of ISO 4259 shall be applied.
- (2) Equivalent EN/ISO methods will be adopted when issued for properties listed above.
- (3) A correction factor of 0.2 for MON and RON shall be subtracted for the calculation of the final result in accordance with EN 228:2008.
- (4) The fuel may contain oxidation inhibitors and metal deactivators normally used to stabilise refinery gasoline streams, but detergent/dispersive additives and solvent oils shall not be added.
- (5) Ethanol is the only oxygenate that shall be intentionally added to the reference fuel. The Ethanol used shall conform to EN 15376.
- (6) The actual sulphur content of the fuel used for the Type 1 test shall be reported.
- (7) There shall be no intentional addition of compounds containing phosphorus, iron, manganese, or lead to this reference fuel.

Table 3: Example for B7 fuel specification for LDV chassis dyno tests from WLTP, Annex 3

5.4. E-Diesel (nominal 52 Cetane, B7)

Table A3/16
E-Diesel (nominal 52 Cetane, B7)

Parameter	Unit	Limits ⁽¹⁾		Test method
		Minimum	Maximum	
Cetane Index		46.0		EN-ISO 4264
Cetane number ⁽²⁾		52.0	56.0	EN-ISO 5165
Density at 15 °C	kg/m ³	833.0	837.0	EN-ISO 3675
Distillation:				
— 50 % point	°C	245.0	—	EN-ISO 3405
— 95 % point	°C	345.0	360.0	EN-ISO 3405
— final boiling point	°C	—	370.0	EN-ISO 3405
Flash point	°C	55	—	EN 22719
Cloud point	°C	—	-10	EN 116
Viscosity at 40 °C	mm ² /s	2.30	3.30	EN-ISO 3104
Polycyclic aromatic hydrocarbons	% m/m	2.0	4.0	EN 12916
Sulphur content	mg/kg	—	10.0	EN ISO 20846/ EN ISO 20884
Copper corrosion		—	Class 1	EN-ISO 2160
Conradson carbon residue (10 % DR)	% m/m	—	0.20	EN-ISO10370
Ash content	% m/m	—	0.010	EN-ISO 6245
Total contamination	mg/kg	—	24	
Water content	mg/kg	—	200	EN-ISO12937
Acid number	mg KOH/g	—	0.10	ASTM D 974
Lubricity (HFRR wear scan diameter at 60 °C)	µm	—	400	EN ISO 12156
Oxidation stability at 110 °C ⁽³⁾	h	20.0		EN 14112
FAME ⁽⁴⁾	% v/v	6.0	7.0	EN 14078

(1) The values quoted in the specifications are 'true values'. In establishment of their limit values the terms of ISO 4259 Petroleum products – Determination and application of precision data in relation to methods of test have been applied and in fixing a minimum value, a minimum difference of 2R above zero has been taken into account; in fixing a maximum and minimum value, the minimum difference is 4R (R = reproducibility).

Notwithstanding this measure, which is necessary for technical reasons, the manufacturer of fuels shall nevertheless aim at a zero value where the stipulated maximum value is 2R and at the mean value in the case of quotations of maximum and minimum limits. Should it be necessary to clarify whether a fuel meets the requirements of the specifications, the terms of ISO 4259 shall be applied.

(2) The range for cetane number is not in accordance with the requirements of a minimum range of 4R. However, in the case of a dispute between fuel supplier and fuel user, the terms of ISO 4259 may be used to resolve such disputes provided replicate measurements, of sufficient number to achieve the necessary precision, are made in preference to single determinations.

(3) Even though oxidation stability is controlled, it is likely that shelf life will be limited. Advice shall be sought from the supplier as to storage conditions and life.

(4) FAME content to meet the specification of EN 14214.

2.3.2 Analysis of relevance

Analysis of relevance should be based on the possible variability of C/H and C/O ratios found for fuels which meet the ranges for reference fuels given in the WLTP Annex 3.

2.4 Inlet air temperature and humidity

Target: Check relevance of humidity and temperature of the intake air for the engine. If relevant, correct for combustion efficiency variations with ambient air conditions.

Method: detailed simulation of combustion and measurement for validation.

Results: low impact found in a simulation exercise for one engine (<0.1%) and higher impact in measurements at one vehicle (<2%) but relative high uncertainty in the effects and also in the relevant sensor signals (representativeness of T and RH as well as accuracy of RH, see chapter 2.10).

Actual WLTP boundaries analyzed: 5.5 to 12.2 g_{Water}/kg_{air} and 296K \pm 5K (temperature tolerances during the test).

2.4.1 Simulation of the effect

The modelling exercise was done for a modern 2 litre diesel engine with the software AVL Boost. The following conditions have been simulated:

- Constant load at: 2,000rpm, BMEP~2bar
- VTG controlled turbocharger
- EGR for the following variants:
 - a) automatic control deactivated
 - b) control to constant air flow (usual engine operation mode)
- Charge air: coolant temperature kept constant

In total 10 different combinations of intake air temperature (+/- 2°C against a base temperature of 27°C) and intake air humidity (25% and 45% RH) have been simulated. Table 4 and Figure 6 show the results for active EGR and VTG controllers, which should represent real conditions well. As expected, the lower humidity results in higher engine efficiency. The simulation shows on average -0.04% BSFC for 25% RH compared to 45% RH. Having the rather inaccurate humidity sensors in mind, which may also be placed in a not completely representative location in the test cell, the results do not suggest that a correction of RH would improve the quality of the test results. The intake air temperature influences the BSFC in the simulation by approx. +/-0.05% when the temperature is changed by +/- 2°C¹³. The results with deactivated EGR and VTG controller showed even lower effects from temperature and RH on the BSFC.

Table 4: Results from the engine simulation for a modern 2 litre diesel engine with variation of intake air temperature and humidity at 2,000rpm and BMEP~2bar with active EGR and VTG control

Intake air			BSFC	Change to base ⁽¹⁾
[°C]	RH	X [g/kg]	[g/kWh]	
25	25%	4.9	276.18	-0.09%
26	25%	5.2	276.21	-0.08%
27	25%	5.5	276.29	-0.05%
28	25%	5.9	276.40	-0.01%
29	25%	6.2	276.47	0.02%
Avg. @25% RH		5.5	276.31	-0.04%
25	45%	8.9	276.27	-0.05%
26	45%	9.4	276.36	-0.02%
27	45%	10.0	276.42	0.00%
28	45%	10.6	276.49	0.03%
29	45%	11.3	276.59	0.06%
Avg. @45% RH		10.0	276.426	0.00%

¹³ The increase of intake air temperature reduces the air density and thus gives slightly lower air to fuel ratio which then has a slightly negative impact on the efficiency.

Effect of +1°C intake air	0.03%
Effect of +1% RH intake air ⁽²⁾	0.002%
Effect of +1g/kg absolute humidity	0.009%

(1) base value set here at 27°C, 45RH ¹⁴

(2) if a correction function for Humidity shall be installed, the correction shall be based on absolute water content ($x = \text{kg}_{\text{H}_2\text{O}}/\text{kg}_{\text{air}}$)

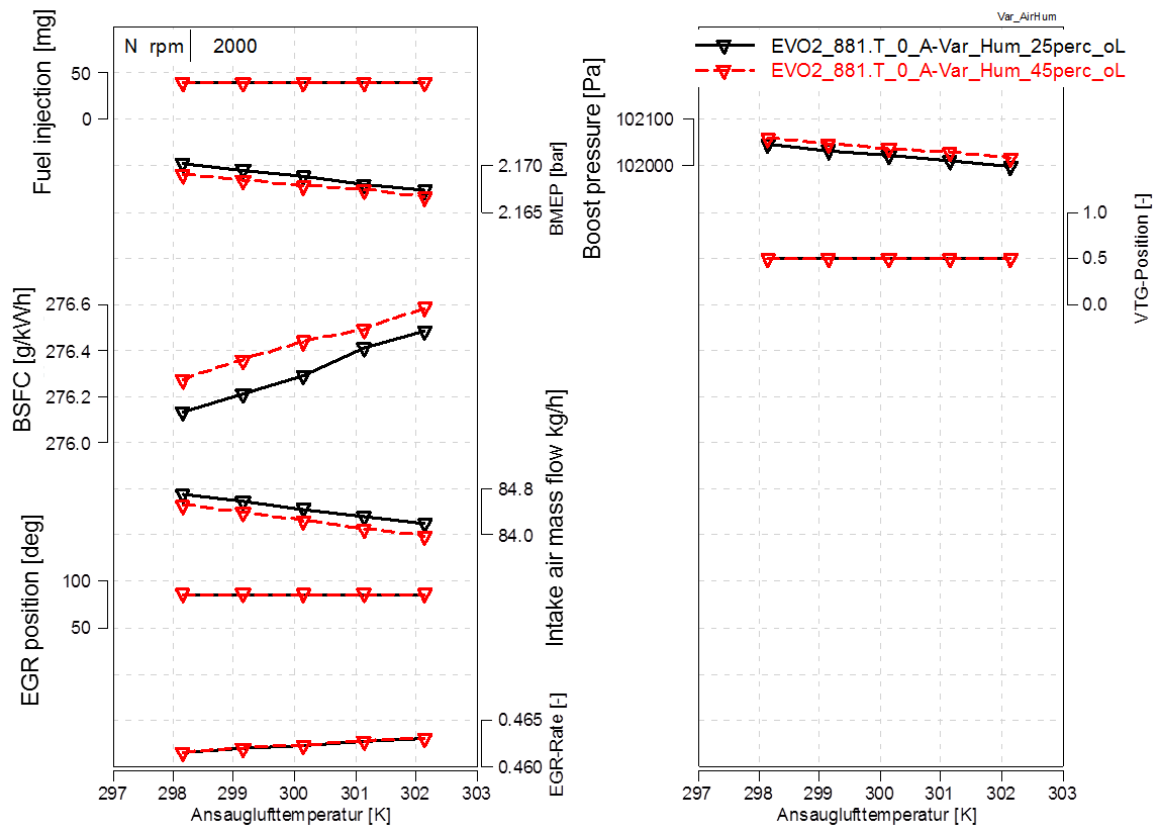


Figure 6: Results from the engine simulation for a modern 2 litre diesel engine with variation of intake air temperature and humidity at 2,000rpm and BMEP=2bar with active EGR and VTG control

2.4.2 Measurements

After analysing the effects for diesel only, minor effects have also been expected for petrol cars too, thus not much emphasis was given to variations of intake air conditions in the vehicle tests. Since no suitable engine simulation model was available for the study, measurements using vehicle No 3 have been performed (petrol EU5). The NEDC was driven with hot start, once with standard intake air temperatures and once with high intake air temperature and low humidity. The directly measured CO₂ emissions indicated that the influence of the variation in humidity and temperature is low (-0.5% for the test at 35°C). However, after applying all other corrections, the temperature effect was found to be rather larger

¹⁴ In the first phase of the project the target temperature in the WLTP was not defined. The effect for the actual WLTP target of 23°C ± 2°C however should be similar as for 27°C +/-2°C

with -1.5% for a change of 10°C and 1.8 g/kg humidity¹⁵. A separation into humidity and temperature effects is not possible due to the few variations tested for humidity. The allowed tolerances (3K and 3.35 g/kg humidity) against the average of the thresholds would have an influence in the range of $\pm 2\%$ on the CO₂ emissions if temperature increases at reduced absolute humidity.

It has to be noted that the uncertainty in the findings based on just one tested vehicle is large. Before determining the correction to be applied, more tests on both petrol and diesel cars will be necessary.

Table 5: Test results for Veh. No. 3 in the NEDC with hot start at 2 different set points for intake air conditions

Tair [°C]	RH [%]	Humidity [g/kg]	CO ₂ /km			
			measured	SOC-corrected	SOC+T-start+P+D corrected	Change against 25°C @47%RH
25	47.0%	9.3	129.26	134.89	133.79	0.0%
35	22.0%	7.7	128.00	133.24	131.94	-1.4%
35	21.0%	7.3	128.33	133.47	131.69	-1.6%
25	47.0%	9.3	128.29	134.65	133.81	0.0%
Average 25°C @ 47.0%		9.3	128.78	134.77	133.80	0.0%
Average 35°C @ 21.5%		7.5	128.17	133.36	131.82	-1.5%
Effect per +1°C						-0.15%
Effect per 1 g/kg increase						0.5% ⁽¹⁾

(1) High uncertainty due to insufficient variations tested for humidity

2.5 Battery state of charge

Target: Check relevance of imbalances in the battery stage of charge and develop correction functions.

Method: Calculation of imbalanced electric work of the alternator from measured Current flow to and from the battery and correct with engine specific Willans function and efficiencies of the alternator.

Results: rather high impact (approx. 3g/km possible) and correction function found with tolerable uncertainties (generic efficiency of alternator and generic engine Willans coefficient). In the actual WLTP the effect is restricted to 0.5% electric energy of the fuel energy for the entire WLTC. With average efficiencies of the alternator and the Willans coefficients given in the WLTP, the 0.5% limit corresponds to less than 2g CO₂/km.

¹⁵ For Otto engines different mechanisms certainly have to be considered to those used for diesel engines. With Lambda=1 control the effect of varying air to fuel ratio has no relevance and the lower air density at higher temperature can reduce the throttling losses. In addition a higher combustion temperature tends to improve the efficiency. Nevertheless, the order of magnitude of the effect measured at vehicle No. 3 seems to be questionable.

2.5.1 Magnitude of the influence

The imbalance in battery SOC can have a quite high influence on the test result although only auxiliaries which are necessary to run the car are consuming energy. Assuming an average basic electrical load for basic devices of a maximum of 300W, an imbalance of 150 Wh would occur if the energy is taken from the battery only. With an alternator efficiency of 65% and a Willans coefficient of the engine of 600g CO₂/kWh, the effect of such an imbalance would be more than 3 g/km in the WLTC. If the test is started with an empty battery and the alternator controller algorithm leads to a battery loading over the cycle, the effect can be much higher. Similarly, a start with full battery can lead to a discharging at the beginning of the cycle to provide capacity for eventual following brake energy recuperation, e.g. Figure 7.

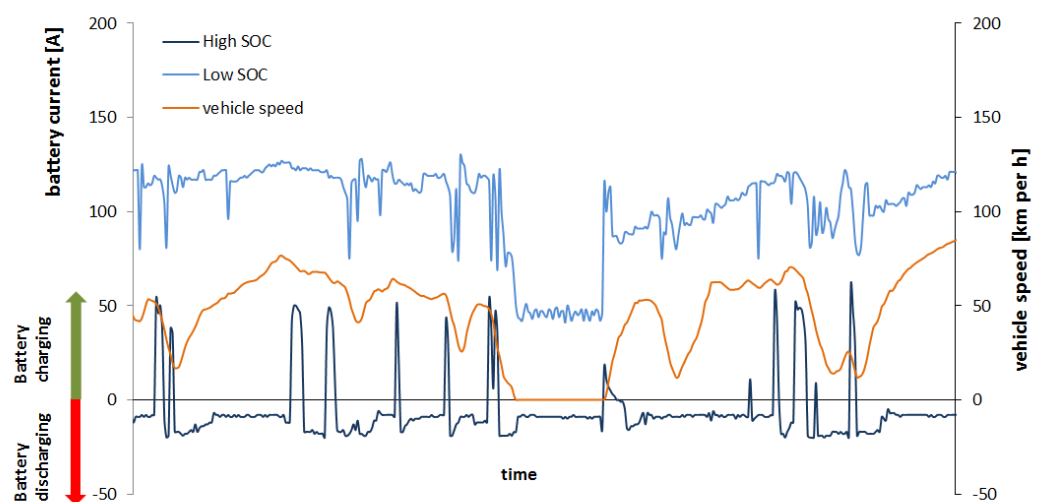


Figure 7: SOC of the battery from a passenger car over a part of the WLTC, once started with an empty battery and once with full battery

A test started with empty battery led to more than 20% higher CO₂ emissions per km in the WLTC compared to a test started with a full battery (Appendix C), but such test conditions will hardly occur within the WLTP regulation. When the battery is charged before the preconditioning test cycle, the SOC at the end of the test is expected to be for most vehicles already on a normal level which shall not lead to such large SOC imbalances in the subsequent test.

2.5.2 Option for correction of SOC imbalances

The correction for SOC imbalances can either be based on the vehicle specific Veline coefficient (k_v in g/kWh) or on generic ones. Since the vehicle based Veline factors are related to the work at the wheel, they would have to be converted into engine work based values through division by the transmission efficiency. Since the latter is not known from the chassis dyno test, a generic efficiency would have to be assumed for different transmission systems. As a consequence of high differences which can be found in the efficiencies from different transmission systems (manual and automatic), it seems to be straightforward to use generic engine Willans factors.

This gives the following correction method:

Calculate the imbalance of energy flow from and to the battery:

a) simple option: $W_{bat} = \int U_{(t)} * I_{(t)} * 0.001 \, dt$ in [kWs] with Current flow from the battery counted with positive sign

The Voltage could also be a generic value of nominal Voltage as suggested in the WLTP draft (UN ECE 2014). For higher accuracy we may also consider the charging and discharging losses which lead to the fact that the battery SOC is reduced if the same electric energy is consumed from the battery as was charged before. This would lead to the more detailed approach:

b) more detailed option:

$W_{bat-charge} = \int U_{(t)} * I_{charge(t)} * 0.001 \, dt$ in [kWs] counting only Current to battery

$W_{bat-discharge} = \int U_{(t)} * I_{discharge(t)} * 0.001 \, dt$ in [kWs] counting only Current from battery

$W_{bat} = W_{bat-discharge} - (W_{bat-charge} * \eta_{bat})$ in [kWs]

with η_{Bat} efficiency of charging and discharging ($\eta_{charge} \times \eta_{discharge}$)

For typical battery systems the η can be assumed with generic values. Draft examples are shown in Table 6.

Table 6: Draft generic combined charge & discharge efficiencies

	Efficiency [%]
Pb	87%
Ni-Mh	90%
Li-Ion	97%

Calculate the CO₂ correction value from the battery imbalance:

$$\Delta CO_{2SOC} [g] = \frac{W_{bat}}{\eta_{Alt}} * k_e$$

with k_e Engine Willans coefficient [g_{CO2}/kWs], generic values per engine technology

η_{Alt} Generic average efficiency of the alternator including transmission losses to the engine (in WLTP draft (UN ECE 2014) an efficiency of 0.67 is suggested. This value is in line with the results from a simulation with the model PHEM using alternator efficiency maps)

If a more accurate base shall be provided for setting up the vehicle specific Veline functions from the SOC corrected WLTP results, the correction shall be done for each WLTC phase separately. This is more relevant, if the test is started with low SOC since the vehicle then tends to load the battery from start-up, which mainly influences the first test phase.

An open question concerning the engine Willans coefficient “ k_e ”, is if and how the behaviour of smart alternator controllers shall be considered. Basically modern alternators are loading the battery at engine overrun conditions (brake energy recuperation). Thus a negative battery energy balance can be attributed mainly to too low an activity of the alternator in phases with positive engine work. Similarly a

positive SOC balance should result mainly from extra alternator activity at phases with positive engine power¹⁶. If we consider this effect, the correction would have to be done with the coefficient of a Willans line which is established from test phases with positive engine power only. The Willans coefficients given in the WLTP (UN ECE, 2014) seem to originate from positive power values only and thus should be representative for the SOC imbalance correction.

2.6 Temperatures from preconditioning and soak

Target: Check relevance of the temperature during soak and preconditioning. If relevant, correct for temperature conditions.

Method: analysis of dependency of friction losses and of fuel consumption as function of oil temperature and measurement at different temperatures at the chassis dynamometer

Results: approx. <0.4% impact on CO₂ emission result for 2°C deviation against the target temperature. Generic correction is possible but would need measurement of oil temperature at test start¹⁷.

2.6.1 Measurements

The influence of variable temperature at test start was found to be a reasonable influencing factor for the resulting fuel consumption. Nevertheless, the rather stringent limitation of +/-3°C of cell ambient temperature and +/-3°C for the lube oil of the vehicle as described in the WLTP draft also limits the effect of deviations against the target temperature as long as the deviations are within the allowed boundaries.

The temperature influences the friction losses but also the combustion efficiency. The combustion efficiency is influenced by the cooler cylinder walls, by different intake air density (see chapter 2.4) and by the control algorithms applied by the manufacturer for EGR, VTG and injection timing during heat up. The control strategies may vary between makes and models, thus a correction function could either consider only general valid effects, or take combustion efficiency matters into consideration as a generic average function.

Analysis of existing measurements at engine test stands at TUG for friction losses as a function of the oil temperature showed that the friction losses at the engine explain by far not the entire additional fuel consumption at cold starts. Similar tests on the transmission system and at bear rings to get a complete view on friction related losses as function of oil temperature were not available. The idea was, to define generic additional friction losses in the engine and in the transmission as function of the start temperature to compute the additional work the engine needs to deliver per °C deviation against the target start temperature. With the engine Willans coefficients the effect on the fuel consumption could be calculated. This approach was tested as an option to exclude eventual effects from differences in engine control at different start temperatures. Figure 8 shows results from an

¹⁶ Certainly the amount of brake energy recuperated depends on the alternator power installed.

¹⁷ Taking the average cell temperature over e.g. last hour of soaking would add reasonable uncertainties since temperature at start depends on temperature course over hours with different weighting of temperature over time.

engine test at steady state conditions. The uncertainties in assuming the losses in the transmission proved to be too high to follow this approach.

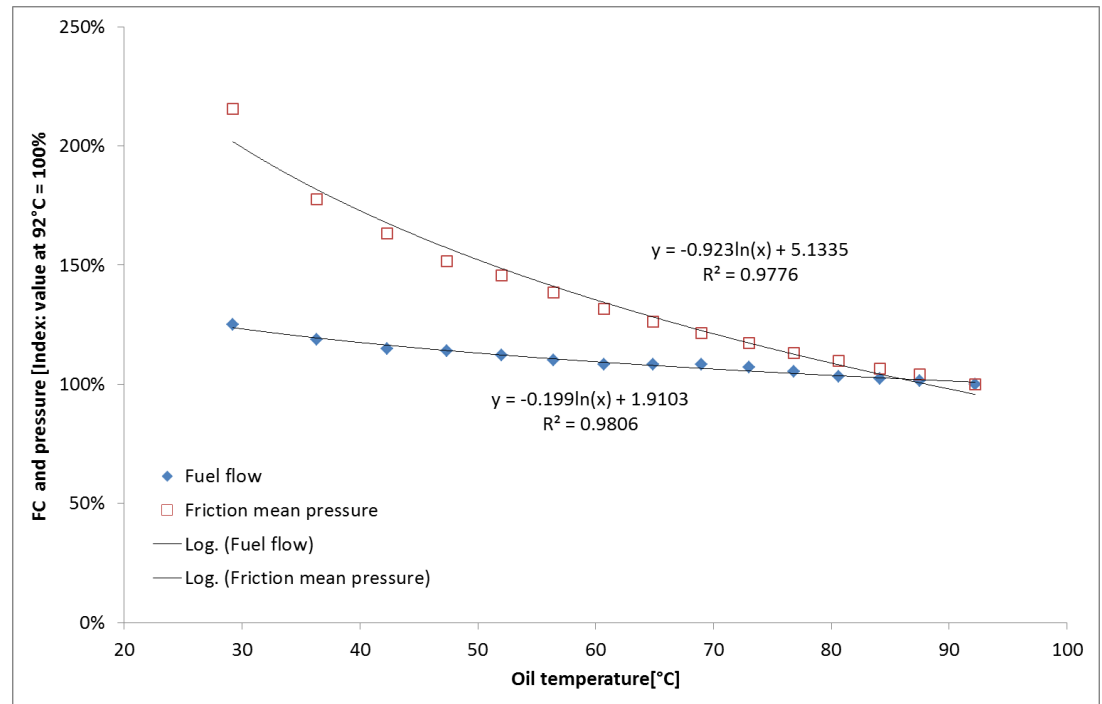


Figure 8: Test data of a constant load point for a 2 litre diesel engine at 2 bar and 2000 rpm

Alternative tests have been conducted on the chassis dynamometer at differing soak temperatures and the additional fuel consumption to reach 90°C oil temperature has been computed by comparison with hot start tests. Table 7 shows test results for vehicle No.2.

Table 7: Test results in WLTC at different start temperatures with vehicle No 2.

	Oil temperature at test start	Fuel consumption	Additional consumption against cold start
	[°C]	[l/100km]	[%]
WLTC Cold start	28.6	5.58	6.4
WLTC Cold start	28.6	5.55	5.9
WLTC Cold start	24.7	5.61	7.0
WLTC Cold start	24.5	5.58	6.5
WLTC Cold start	22.4	5.61	7.1
WLTC Cold start	22.7	5.64	7.7
WLTC Cold start	11.7	5.80	10.6
WLTC Warmstart	90.0	5.24	0.0

The results from the engine test in Figure 8 suggest that a correction function could follow a logarithmic function. Certainly the range of 23°C +/- 2°C could be approximated by a linear equation without losing accuracy. Figure 9 shows the resulting regression function for vehicle no. 2.

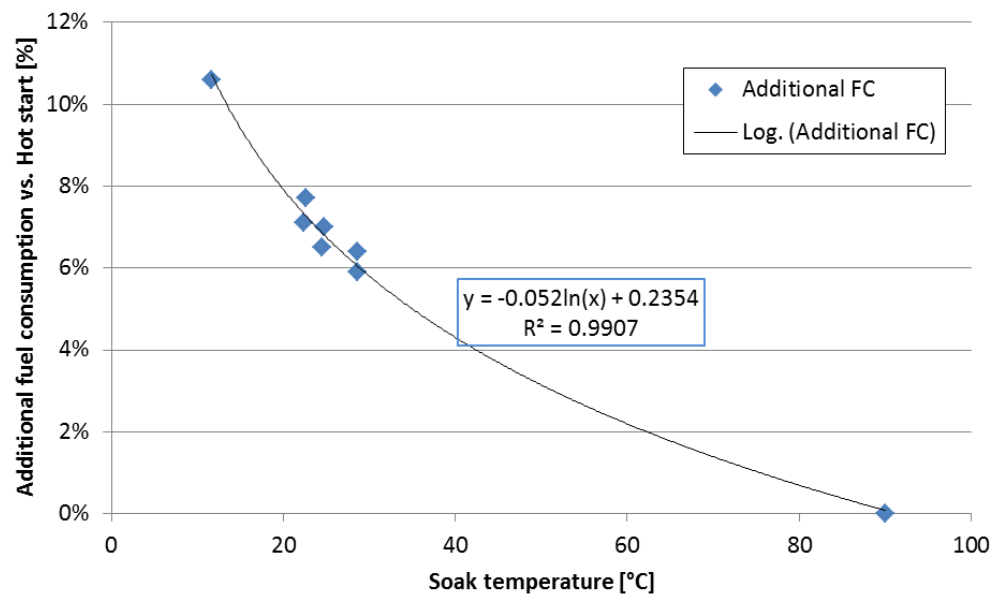


Figure 9: Additional fuel consumption against hot start conditions as function of oil temperature for vehicle No. 2 in the WLTC

If just the difference at different start temperatures need to be calculated, the logarithmic equation from Figure 9 results in:

Equation 1: $\Delta FC = -0.052 * \ln\left(\frac{t}{t_{ref}}\right)$
 t_{ref} WLTP target temperature (23°C)

Similar tests have been performed with vehicle no. 3 (gasoline EURO 5), which gave lower effects of the soak temperature.

To base the correction function on a larger database of vehicles, test data from the ERMES database was used (<http://www.ermes-group.eu/web/>), which is also the base data for HBEFA and COPERT emission models. The database includes for several EURO 5 and EURO 6 cars, hot and cold start NEDC tests (no WLTC yet). To convert cold start extra emission influences, the percent extra emissions of the NEDC have been multiplied by 2/3 to compensate for the longer duration of the WLTC (1800 sec versus 1200 seconds). Then logarithmic regression curves have been computed to fit the two test values per car (cold start temperature and hot start). The final correction in the range of 23°C \pm 2°C was then fitted as a linear function on top of the results from the logarithmic regression line in this temperature range, as shown in Figure 10.

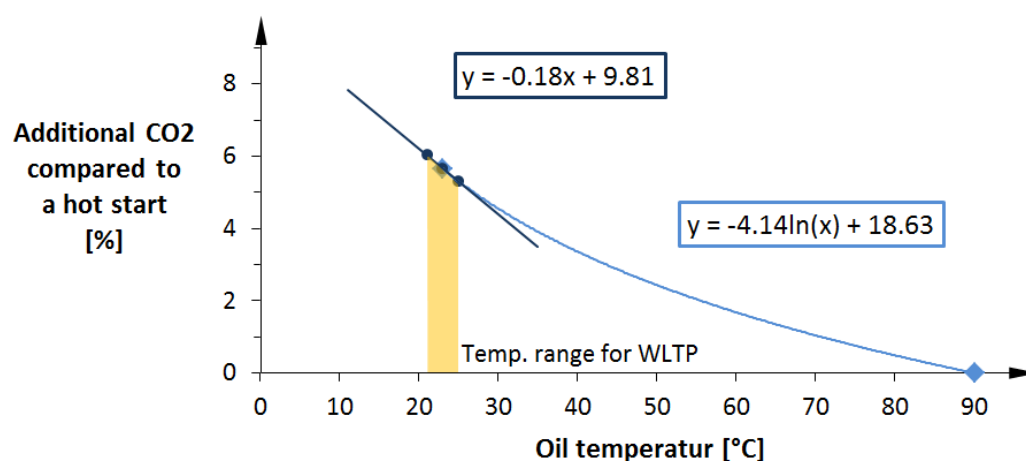


Figure 10: Schematic picture of the method to compute the soak temperature influence from hot and cold start tests

Table 8 shows the vehicles which have been used for setting up the correction function.

Table 8: Vehicles measured in hot start and cold start from the ERMES data base.

	Capacity	Empty weight	Emission standard	Extra FC at (23°C) versus hot start (90°C)
Gasoline cars	[ccm]	[kg]		[%]
Veh. B1	1339	1343	Euro 5	5.60
Veh. B2	1984	1505	Euro 5	8.86
Veh. B3	1197	1040	Euro 5	4.95
Veh. B4	1390	1142	Euro 5	5.60
Veh. B5	1997	1700	Euro 5	3.88
Veh. B6	1364	1410	Euro 5	3.54
Veh. B7	1368	1170	Euro 5	7.83
Veh. B8	1390	1290	Euro 5	4.93
Average				5.65
Diesel cars				
Veh. D1	1560	1318	Euro 5	6.18
Veh. D2	1995	1565	Euro 5	3.70
Veh. D3	1968	1276	Euro 5	7.08
Veh. D4	1968	1542	Euro 5	6.17
Veh. D5	1995	1580	Euro 5	4.61
Veh. D6	2993	2150	Euro 6	4.25
Veh. D7	2993	1810	Euro 6	5.48
Veh. D8	1598	1204	Euro 5	8.16
Average all				5.70

The method described above gives similar corrections for petrol and for diesel cars. When the method is applied for all cars in Table 8 the following correction function is gained.

$$\Delta CO_2 = 0,0018 * (t - t_{ref})$$

with t Engine oil temperature at test start °C

t_{ref} Target temperature in WLTP (23°C)

The CO₂ test result corrected for the influence of variable soak temperature is then:

$$CO_2 \left[\frac{g}{km} \right] = CO_2 * (1 + \Delta CO_2)$$

2.7 Inaccuracy of road load setting

Target: Check relevance of the inaccuracy of the road load applied at the chassis dyno. If relevant and possible, elaborate correction method.

Method: measurement of coast down tests on the chassis dyno directly after the WLTC to establish a method to test the actual values of the road load coefficients. From differences against the target road load, the difference in the work at the wheels over the cycle can be computed and corrected with the vehicle Veline coefficient.

Results: more than 3% impact on the CO₂ emission result is possible. It is not clear yet if the road load measured directly after the WLTC is representative for the road load during the WLTC. Clarification may need costly measurements with torque meter rims.

2.7.1 Method

The correction is based on results from coast down tests directly after the WLTC. The conditions and the evaluation of the coast down shall follow the WLTP regulation for coast down tests on the test track. The resulting road load values are then used to compute differences in the work over the cycle against the target road load values. The effect on CO₂ emissions is then calculated from the work difference with the vehicle Veline coefficient.

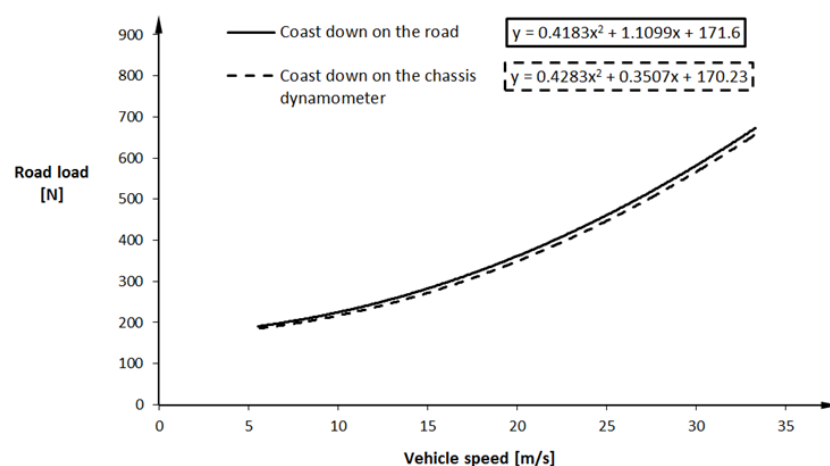


Figure 11: Schematic picture of the target coast down and of the coast down result after the WLTC

Using the assumption that the coast down test is representative for the road load in the WLTC, the correction for the road load would work as follows:

Calculate the actual wheel power for the road load coefficients from the chassis dynamometer coast down test:

$$P_{(j)} = (R_0 + R_1 \cdot v_{(j)} + R_2 \cdot v_{(j)}^2 + m \cdot a_{(j)}) \cdot v_{(j)}$$

Calculate the actual wheel power for the road load coefficients from the target value:

$$P_{p(j)} = (R_{0w} + R_{1w} \cdot v_{(j)} + R_{2w} \cdot v_{(j)}^2 + m \cdot a_{(j)}) \cdot v_{(j)}$$

$v_{(j)}$ velocity driven in the WLTC (average value between two original speed recordings to fit to the calculated acceleration as described before)

m vehicle test mass + rotational inertias converted to equivalent translator mass [kg]

R_0, R_1, R_2 Road load from the coast down tests at the chassis dynamometer directly after the WLTC in [N], [N*s/m] and [N*s²/m²]

R_{0w}, R_{1w}, R_{2w} Target road load coefficients in [N], [N*s/m] and [N*s²/m²]

Then the average power values over the WLTC are computed and consequently the total work at wheels:

$$\Delta W_{\text{wheel}} = 1.8 \times (P_p - P) \text{ in [kWs]}$$

If the correction for road load deviations is not combined with the correction for vehicle speed deviations (chapter 2.2), the calculation of the difference in work can be simplified, since mass and acceleration are then identical for both road load settings.

$$P_{p(t)} - P_{(t)} = R_{0w} - R_0 + (R_{1w} - R_1) \cdot v_{(t)} + (R_{2w} - R_2) \cdot v_{(t)}^2$$

$$\Delta W_{\text{wheel}} = \int_1^{1800} (P_{p(t)} - P_{(t)}) dt$$

Then the vehicle based Veline function is applied to correct for the deviation against the work from the WLTC target velocity:

$$\Delta CO_{2p} [g] = \Delta W_{\text{wheel}} \cdot k_v$$

with k_v Vehicle Veline coefficient [g_{CO2}/kWs] from WLTP

2.7.2 Test results

In the WLTP (UN ECE, 2014) the preconditioning for measuring the “initial chassis dynamometer setting load¹⁸”, see WLTP Annex 4 – Appendix 2, seems to be sufficiently defined, if the criterion given in WLTP Annex 4 paragraph 4.2.4.1.3. has to also be fulfilled at the chassis dynamometer test (minimum 20 minutes at defined velocities). While the preconditioning is defined exactly in the WLTP, the time between preconditioning and the coast down test for chassis dynamometer calibration is not defined. Performing the tests after a shorter warm up or after a longer stand still before a coast down typically gives higher initial losses from the bearings and

¹⁸ There seems to be a small error: in the equation we read “F_{dj}” but in the explanation only “F_{di}” appears. IN the actual version from May 2014 the error seems to be corrected.

transmission at the roller bench, from the tyres and from the dragged part of the vehicles transmission and bearings. As a result the “adjustment road load”, which is the difference between target road load and initial road load, would be rather low to meet overall the target road load. If the temperature level from roller and the vehicle is higher in the later WLTC, lower internal losses occur at the roller and from the vehicle’s tyres, bearings, etc. As a result, for such a scenario the adjusted road load would be lower in the WLTC than in the initial coast down test. Such insufficient preconditioning was found to influence the CO₂ test results by more than 5%.

Performing the preconditioning according to the WLTP still gave notable deviations in the road load parameters for some tests (Figure 12 to Figure 14), resulting in effects on the CO₂ emissions of more than 2 g/km (see Appendix C). The deviations found for the test vehicles did not follow a common trend. For test vehicle No. 3 all coast down tests that have been performed after NEDC showed the same level (Figure 13). When applying the road load correction on the NEDC CO₂ values, the correction function consequently shows only small effects (see Appendix C).

Higher differences between target road load and coast down results after the WLTC tests were found for vehicles No. 2 and 4 (Figure 13 and Figure 14). The differences between the measured road load values against the target values is different for R₀, R₁ and R₂ with no uniform trend between the two vehicles tested.

The explanation for the different effects after NEDC and WLTC seems to be, that after WLTC the state of chassis dyno and vehicle is hotter than after NEDC and thus the internal losses are a bit lower after WLTC. Since the same effect should also occur in preconditioning before the initial loss run, the effects found here may depend on the design of the chassis dynamometer and on details of the procedure for the initial loss run.

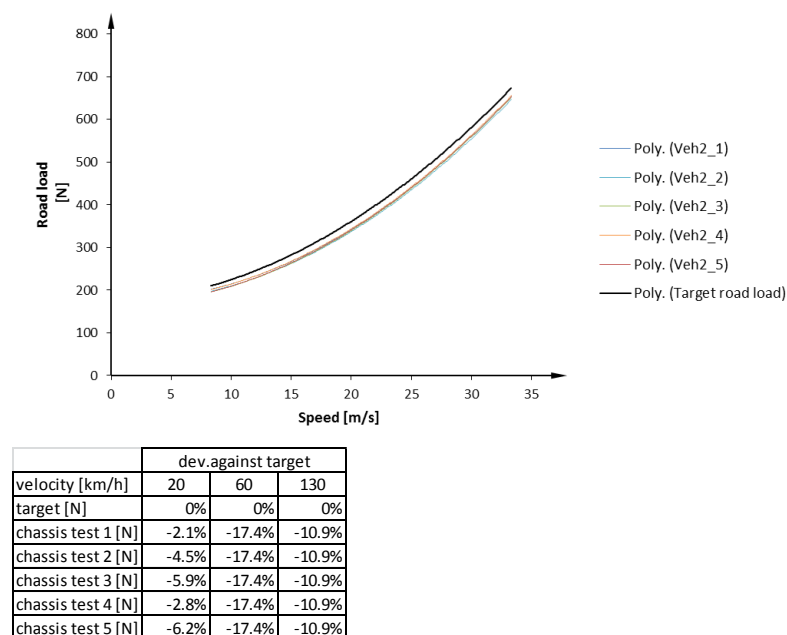


Figure 12: Comparison of the coast down tests after the WLTC tests with the target coast down for vehicle No. 2

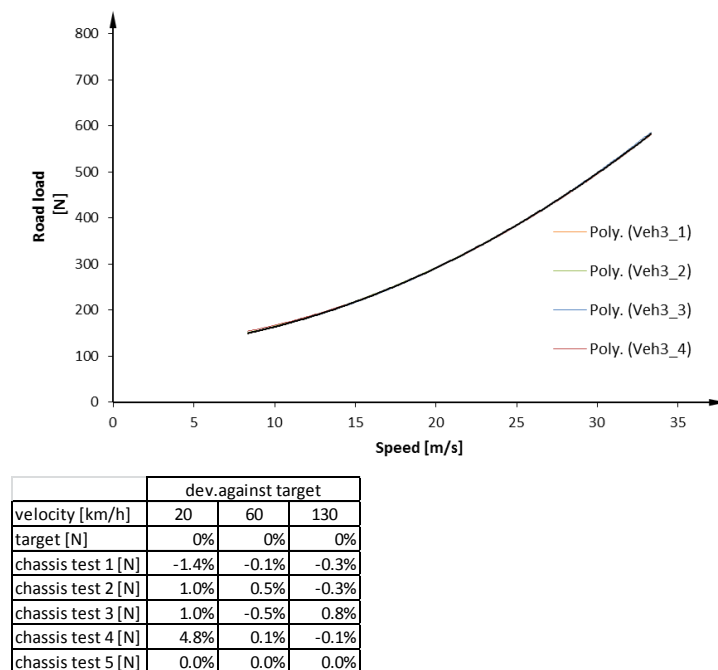


Figure 13: Comparison of the coast down tests after the NEDC tests with the target coast down for vehicle No. 3

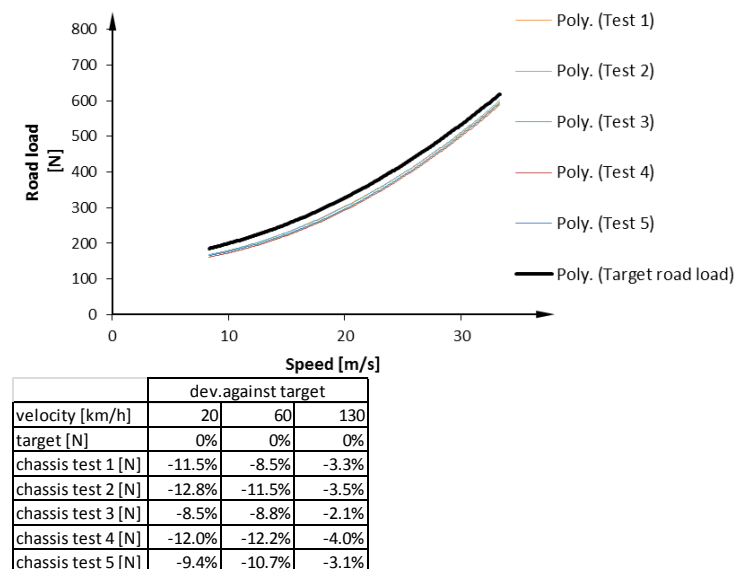


Figure 14: Comparison of the coast down tests after the WLTC tests with the target coast down for vehicle No. 4

Concerning the selection of the proper coast down test after the WLTC, similar behaviour was demonstrated for all tested vehicles. The first test after WLTC gives the lowest road load results, while the third test gives the highest ones (Figure 15). This indicates a cooling down of vehicle and chassis per coast down. If no errors are expected in a single coast down test after WLTC, the best option would be to undertake one test and use these results. If outliers may occur, a series of three coast downs is suggested, where the test with the medium coast down time shall be selected for the evaluation.

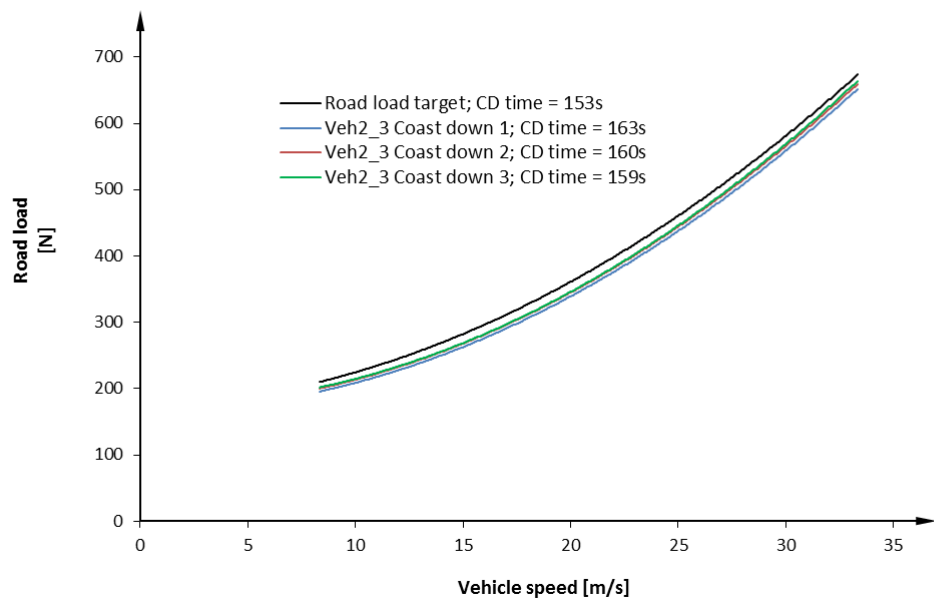


Figure 15: Results of 3 consecutive coast down tests after the WLTC for vehicle No. 2 in comparison to the target road load

An alternative to the road load correction would be a precise definition of the calibration procedure for the road load settings at the chassis dynamometer. This is assumed to give similar effects for the reproducibility but requires less effort in testing and in test evaluation.

A draft for the amendments necessary in the WLTP to better define the procedure for adjusting the road load to the chassis dynamometer is given in Annex G.2.

2.8 Electrified vehicles

The main effect to consider is how the battery charging/discharging losses have to be considered in the energy balance.

A similar approach as for SOC imbalances in chapter 2.5 is possible. A more detailed elaboration could be started after discussion if this option fits into the actual discussion on HEV.

2.9 Gear shifts

Target: Check relevance of deviations against target gear shift points and develop correction function if possible.

Method: simulation with Passenger car and Heavy duty Emission Model (PHEM) to obtain influence of gear shift variations.

Results:

The gear shift points influence the vehicle's fuel consumption (FC) to a large extent. For the FC investigation of different gear shift points in WLTC, various simulations with one petrol engine and one diesel engine were performed to test the sensitivity of the fuel consumption against small deviations in gear shift timing.

The vehicles investigated are listed in Table 9. This table also shows the test mass for the WLTC, which was calculated according to the WLTP regularities. (WLTP, 2014)

Table 9: Vehicle data used for the sensitivity analysis

Vehicle	Engine power [kW]	Unladen mass (DIN) [kg]	Max. permissible mass [kg]	WLTC test mass [kg]	Transmission type [-]	Number of gears [-]
Diesel segment C	81	1298	1870	1579	manual	6
Petrol segment C	132	1338	1910	1623	manual	6

Simulation of the influence from different gear shift points in WLTC

As mentioned above, various simulations for each vehicle with the simulation tool PHEM were undertaken. To start with, the FC from both vehicles in WLTC were simulated with standard gear shift points and settings. The standard gear shift points were calculated with the MS-Access-tool containing the actual gear shift rules for the WLTP (provided by Mr. Heinz Steven). To show the influence of different gear shift points the following versions were investigated, in accordance with the WLTP regularity (the gear change must be started and completed within ± 1 s of the prescribed gear shift point, (WLTP, 2014)):

- Move all gear shift points by - 1 s
- Move all gear shift points by + 1 s
- Move all gear shift points by - 1 s @ gear up and +1 s @ gear down
- Move all gear shift points by + 1 s @ gear up and -1 s @ gear down

In Figure 16 and Figure 17 the gear shift points for the different versions are shown for the part of the WLTC up until 100 seconds duration. The velocity is shown by the blue line, whilst the red line represents the original gear shift points. In Figure 16 the dotted green line shows the moved gear shift points by - 1 s and the dashed violet line the moved gear shift points by + 1 s. In Figure 17 the dotted green line shows the gear shift points by version c.) and the dashed violet line the gear shift points by version d.).

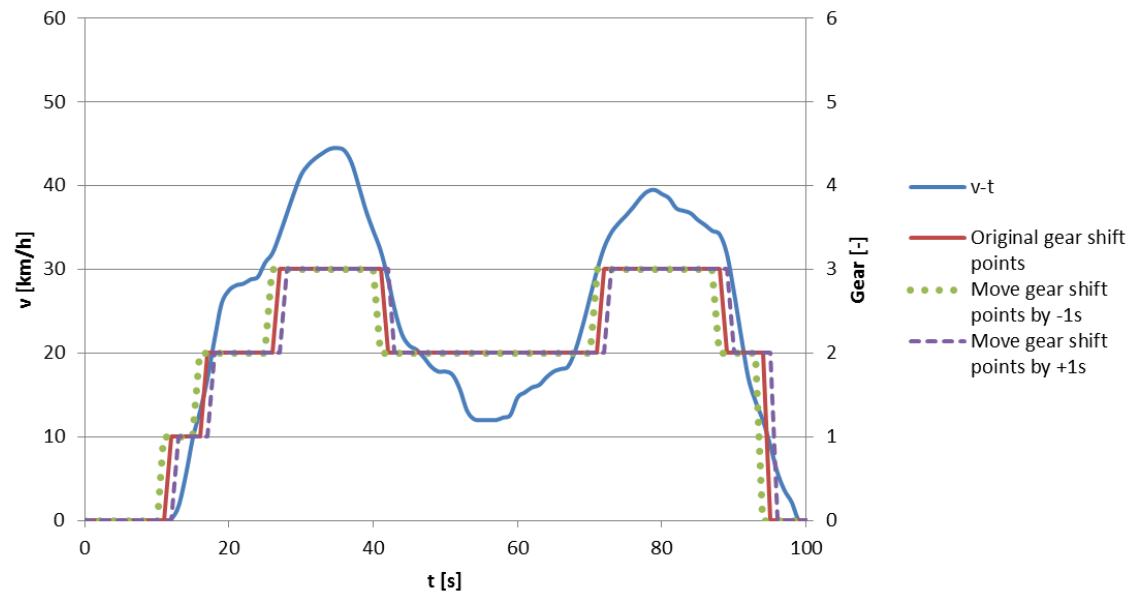


Figure 16: Visualization of different gear shift points, version a.) and version b.)

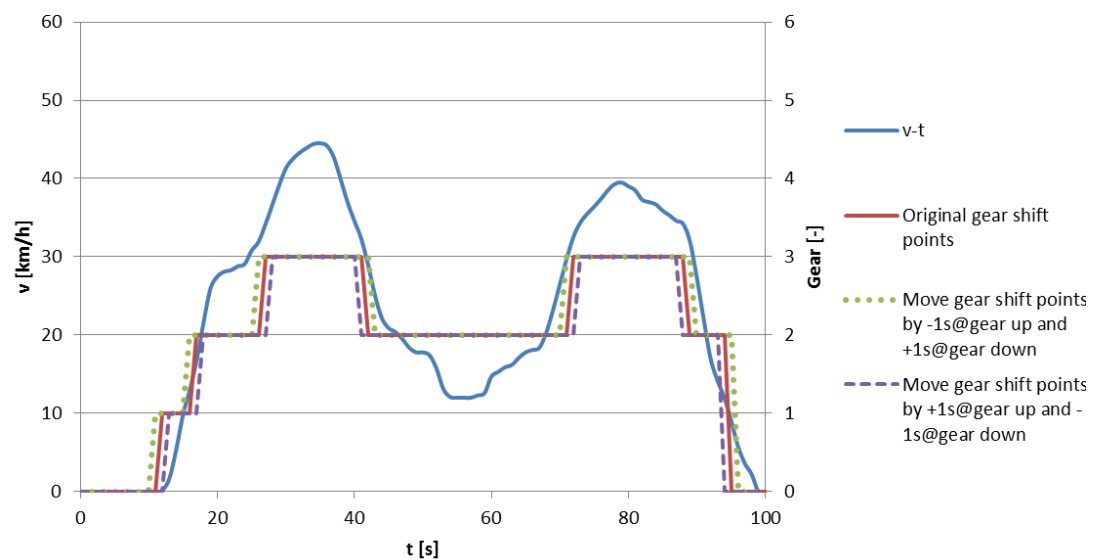


Figure 17: Visualization of different gear shift points, version c.) and version d.)

The FC calculated from the different cases are listed in Table 10. Cases No. 1 and No. 6 give the FC for the petrol and diesel engine with standard gear shift points and settings. The FC deviations from the other cases (expressed as a percentage) are based on the corresponding basis vehicle.

As expected, version c.) gives the lowest FC for both engines with 1.2 % FC reduction for the diesel vehicle and 1.1 % reduction for the petrol vehicle. With version d.), the FC increases by 1.6 % for the diesel engine and 1.4 % for the petrol engine. The FC deviations from the other versions are between the best and worst case values.

Table 10: FC regarding different gear shift points

No.	Vehicle	Cycle	Gear shift points	FC [g/km]	Delta [%]
1	Diesel segment C	WLTC	Not modified	39.07	0.0 %
2			Move by + 1 s	39.57	1.3 %
3			Move by - 1 s	38.69	- 1.0 %
4			Move by - 1 s @ gear up and + 1 s @ gear down	38.58	- 1.2 %
5			Move by + 1 s @ gear up and - 1 s @ gear down	39.68	1.6 %
6	Petrol segment C		Not modified	54.06	0.0 %
7			Move by + 1 s	54.68	1.1 %
8			Move by - 1 s	53.57	- 0.9 %
9			Move by - 1 s @ gear up and + 1 s @ gear down	53.44	- 1.1 %
10			Move by + 1 s @ gear up and - 1 s @ gear down	54.81	1.4 %

Possible correction functions

Corrections could be applied only if the change in gear shifts against the target is known. Deviations could be computed from a measured engine speed signal. A correction function could then be based on generic functions for change in FC over change in rpm. A simple, but less accurate, option could be based on integration of deviations in gear shift time against the target in total seconds. A generic function for change in FC over the integrated time deviation for the gear shift manoeuvres could then be established. Further details need to be elaborated if it is clear that an engine speed signal would be available from type approval tests.

To be completed if reasonable idea comes up.

2.10 Accuracy of relevant sensor signals for correction functions

The correction methods demand accurate input data to improve the accuracy of the CO₂ test result. The accuracy of the input signal needs to be clearly higher than the range in which the signal shall be corrected. E.g. a correction for $\pm 2^{\circ}\text{C}$ oil temperature at the test start, needs an accuracy of the temperature signal much better than 2°C to achieve an overall improvement.

Table 11 summarizes the actual definitions in the WLTP (UN ECE, 2014) and the requirements for applying the correction functions. Certainly the requirements can be discussed to find a compromise between effort and accuracy, but the following signals seem to need higher accuracy than stated in the WLTP:

- Vehicle speed: relevant for correction of deviations against target speed; at 130 km/h, 1.3 km/h inaccuracy is allowed according to WLTC. It seems not to be reasonable to correct ± 2 km/h deviation with such sensor inaccuracy.
- Oil temperature of the vehicle: relevant for correction of start temperature. No definition of the position of such a sensor and of the sensors accuracy was found in WLTP.
- Test cell temperature and humidity: if a correction of intake air conditions shall be applied, much higher accuracy than demanded in the WLTP would be necessary.

Table 11: Accuracies defined in WLTP for the input data relevant for the correction functions elaborated before

Signal	Accuracy demanded in WLTP	Accuracy necessary for proper correction function
Vehicle speed and chassis dyno roller speed	± 0.5 km/h or ± 1 per cent, whichever is greater	If a deviation against target velocity within a tolerance of ± 2 km/h shall be corrected, the accuracy of the speed signal needs to be at least less than 0.5 km/h also at higher velocities if deviations of < 2 km/h shall be corrected.
Time accuracy:	min. ± 10 ms; time resolution: min. ± 0.01 s	Sufficient
Wheel torque (per torque meter):	± 3 Nm or ± 0.5 per cent of the maximum measured torque, whichever is greater	Signal not used for corrections here. Torquemeter wheel rims allow accuracies of up to 0.25 per cent (ACEA, 2014). The 0.5% seems to be reasonable.
Chassis dynamometer force	± 10 N or ± 0.1 per cent of full scale, whichever is greater	Signal not used, accuracy seems to be sufficient.
Test cell ambient air temperature	accuracy of ± 1.5 K Measured at vehicle cooling fan outlet	Not sufficient for correction of intake air temperature in a tolerance of ± 5 K. In (MAC, 2014) temperature sensors with accuracy of $\leq \pm 0.3K + 0.005 \cdot t$ are requested, that gives ± 0.5 K. DIN IEC 751 also defines for class B: $0.30 + 0.005 \cdot t$. This could be a reasonable demand also for the WLTP. Position of sensor seems to be suitable.
Test cell absolute humidity (Ha)	accuracy of ± 1 g _{H2O} /kg _{air} Measured at vehicle cooling fan outlet.	A total tolerance of 6.7 g _{H2O} /kg _{air} is defined in WLTP, thus more accurate sensors seem to be advantageous. In the actual draft for the MAC test procedure an accuracy of < 0.2 g/kg at $+20..30$ °C (i.e. $\pm 1\%$ for a range between 35% to 55% RH) is demanded (MAC, 2014). Position of sensor seems to be suitable.
Current transducer	accuracy of 0.5 per cent of the measured value (in A) or 0.1 per cent of full scale deflection, whichever is smaller.	Seems to be sufficient, (MAC, 2014) refers to the WLTP in this case.
Oil temperature	No definition of accuracy found in WLTP yet	If the soak temperature shall be corrected in the range of $+2$ °C, an accuracy of the sensor according to DIN IEC 751 class A ($0.15 + 0.002 \cdot t$) seems to be necessary. In addition a representative location for temperature measurement would be necessary.

3 WLTP coast-down test procedure

The coast down testing for road load determination consists of four major parts:

1. Vehicle and tyre preparation
2. Conditioning
3. Coast down testing
4. Data analysis

The WLTP legislative text is based on the NEDC text. The approach is similar, although some major conceptual changes are introduced. An important change is a switch from coast-down time to coast-down power in the evaluation. The approach is still a mixture of time and power (i.e., the reciprocal of time), however, the central theme is that the difference in force in the “a” and “b” run, as the result from wind and test-track slope, are properly added to yield a limited net force.

Many other changes in the text are related to stricter conditions and a more precise formulation of the procedure. In particular, tyres to be used are specified in terms of tyre label, wear, and pressure. Also the weight of the vehicle is typically higher, matching better the typical production vehicle weights.

3.1 Corrections included in the WLTP

In the WLTP a number of corrections are already included in Annex 4 for arriving at a standardized road load:

3.1.1 *Wind correction (GTR Annex 4 section 4.5.3)*

Based on the ‘a’ and ‘b’ test together, there is a small remaining force resulting from a larger increase of the air drag into the wind than a reduction of the air drag with the wind from behind. The correction is based on the vector addition of both tests, combined with the assumption that the air drag is of the generic form:

$$\text{Force [N]} = F_2 * v^2$$

The combination of the quadratic form, and the factor “F2” yields a correction for wind of the same form:

$$F_{\text{wind}} = F_2 * v_{\text{wind}}^2$$

To be subtracted from the observed force.

3.1.2 *Air density (GTR Annex 4 section 4.5.1)*

The correction for the air density, also relies on assigning air drag solely to F2 and the use of the ideal gas law:

Density ~ Pressure/Temperature

Only negligible errors are made by using the ideal gas law. No systematic study into the assignment of air drag to F2 has been found. Furthermore, the onset of turbulence and the resulting wall flow thickness is considered a major influence. For example, it is taken into account in the design of edge curvatures of the A-stile.

The onset of turbulence is affected by the temperature through viscosity. These effects do not find their way into the correction procedure as it is considered too complex. No impact of air density on F1 is assumed in the WLTP, as the nature of F1 is not fully known.

3.1.3 *Tyre viscosity (GTR Annex 4 section 4.5.2)*

The temperature of the tyre, reducing the hysteresis loop and viscous losses in the tyre, is included in a WLTP correction. In this correction the ambient temperature is used. However, tyres heat up, and this may depend on solar radiation, road surface temperature, blue sky, precipitation, etc.. None of these underlying effects are taken into account in the correction. However, in the test program the magnitude of the correction is found to be correct. Hence, it can be accepted as an appropriate correction with temperature, however, not based on a sound physical model incorporating all major effects. Furthermore, as in air drag, also here the separation between rolling resistance and air drag is an assumption, globally correct, but the F1 term in the road load seems to carry both air-drag and rolling resistance effects. In the legislative text F0 and F1 are assigned to rolling resistance, F2 to air drag.

3.1.4 *Test mass correction (GTR Annex 4 section 4.5.4)*

The correction for a different test mass is based on the assumption that rolling resistance acts like friction: the forward force is proportional to the vertical force, or weight. In first order, this is a correct assumption, based on different measurements, and on the different underlying physical phenomena with constitute together the total rolling resistance. Hence the correction for test mass variations is proportional with the rolling resistance:

$$F0 = F0_{\text{test}} * (TM_{\text{reference}}/TM_{\text{test}})$$

3.1.5 *The meaning of the F1 term*

The WLTP relies of the road load coefficients F0, F1, and F2 to apply the corrections. The air-drag is associated with F2, and air drag correction, like the air density, are applied to F2. The terms F0 and F1 are associated with rolling resistance. This is an 'a priori' assumption. In particular F1 has a dubious status, which may combine rolling resistance, transmission losses, and air drag effects. It is quite common that F1 is negative. For example the EPA certification data of 2013 has 10% of the road load values below zero, i.e., a negative effect.

It may very well be that in the transition to turbulent flow as the velocity increases, the air drag initially increases before the eventual drop in air drag associated with developed turbulent flow. This is related to boundary layer thickness, and flow separation at the tail of the vehicle. In that case F1 may indicate something of this transition.

The velocity dependence of rolling resistance is also changing. This affects the meaning of F1 and F2, which can incorporate some rolling resistance. Traditionally, a linear increase with velocity existed, however with modern radial tyres the rolling resistance remains nearly constant up to high velocities, with an increase above 100-120 km/h. This would suggest a velocity dependence that is more properly part of F2 than F1.

Since F0, F1, and F2 are the result of fitting procedure coast-down time-interval data, the effects are not separated. The assignment of F2 to air-drag can lead to a

minor overestimation of the correction in the order of 10%. Likewise, equating F_0 and, especially, F_1 to rolling resistance, some corrections of the rolling resistance, such as the mass correction, may lead to a minor deviation.

3.1.6 Coast-down test

Coast down testing is performed to determine the resistance of the vehicle to motion. It requires a certain amount of power to keep a vehicle in motion at a constant velocity. In the absence of acceleration or deceleration, this is the friction force of the vehicle: internally, the contact of the tyres, and the air drag constitute this force. Especially at higher velocities, the engine is used mainly to overcome this resistance. In the laboratory, on the chassis dynamometer test, this resistance, determined in the coast-down test, is reproduced to ensure the same engine load as on the road is associated with the laboratory test.

The force balance in Newtons [N] of a vehicle is given by:

$$(M + m_r) \cdot a = F_{\text{driveline}} + F_{\text{rolling}} + F_{\text{air-drag}} \sim F_0 + F_1 \cdot v + F_2 \cdot v^2$$

Where:

- M : the weight of the vehicle [kg]
- m_r : the rotational inertia of the vehicle (I_{moment}/R^2) [kg]
- a : the acceleration ($a = dv/dt$) [m/s^2]
- F_x : the respective forces [N]
- v : the velocity [km/h]
- F_0, F_1, F_2 : the road-load coefficients [N, N/(km/h), N/(km/h)²]

Typically, F_0 is associated with driveline and rolling resistance and F_2 with air-drag. The rolling resistance is dominant over the driveline, during the coast-down test when the clutch is disengaged. The coefficient F_1 can be positive or negative, depending on the details at intermediate velocities. This term in the polynomial affects mainly the total resistance between 30 and 80 km/h. However, this coefficient, and the association is an approximation. Rolling resistance is known to increase at high velocities. Furthermore, the generic formula, such as the Streibek formula, shows also an increase in resistance torque in driveline bearings with an increase in rotational velocity, from a baseline value at low speeds.

The air-drag is often approximated by:

$$F_{\text{air-drag}} \sim \frac{1}{2} \cdot C_w \cdot \rho_{\text{air}} \cdot v^2 \cdot A_{\text{frontal}}$$

where ρ_{air} is the air density [kg/m^3]; v^2 the square of the velocity [m/s]; A_{frontal} [m^2] the frontal area of the vehicle; and C_w the aerodynamic drag coefficient associated with the shape of the vehicle. This is typically in the range of $C_w \sim 0.25-0.5$ for passenger cars (higher for heavy-duty vehicles and powered two-wheelers). Note, this formula is based on a turbulent flow around the vehicle, and is better suited for high velocities than low velocities.

Tyres have rolling resistance coefficients (RRC [-]), which, combined with the vertical force on the wheel, yield the resistance force. Tyre labels are based on these coefficients, and therefore seem to suggest that the rolling resistance is proportional to the weight of the vehicle. This is a good first order approximation:

$$F_{\text{rolling}} \sim \text{RRC} \cdot M \cdot g$$

where M is the weight of the vehicle, and $g = 9.81 \text{ m/s}^2$ the gravitational constant converting weight to force.

Since the type-approval test consists of two parts: the coast-down test and the chassis dynamometer, there are a number of issues concerning the use of the coast-down results on the chassis dynamometer. Traditionally, there has been quite a lot of flexibility in the NEDC test procedure for the limitations of the chassis dynamometer. However, this does not take away from the fact that fundamentally the vehicle should have the same coast-down test results on the chassis dynamometer as on the road (see Figure 18). This involves the following three aspects:

1. The same vehicle, as much as possible. This includes the same weight and wheels.
2. Correct inertia settings, or weight of the vehicle (with the inclusion of the rotating inertia of a stationary axle on the chassis dynamometer)
3. The same power, or rolling resistance. This can be a limited number of settings, for example, power at 80 km/hr, or the three values F0, F1, and F2,. However, preferably, the power settings at all the different velocities reported in the coast-down test are determined and compared with the coast-down test..

The rotating inertia is a complicating factor in the test. If all axles were rotating there would be no problem. It is the stationary axle which creates a mismatch between the two coast-down tests. A fixed 1.5% (e.g. 21 kg for a 1,400 kg vehicle) of the vehicle weight is assumed, which is an appropriate average value, but which may deviate substantially in some cases. Moreover, the use of different wheels and tyres, complicates the relation between the coast-down test and chassis dynamometer test.

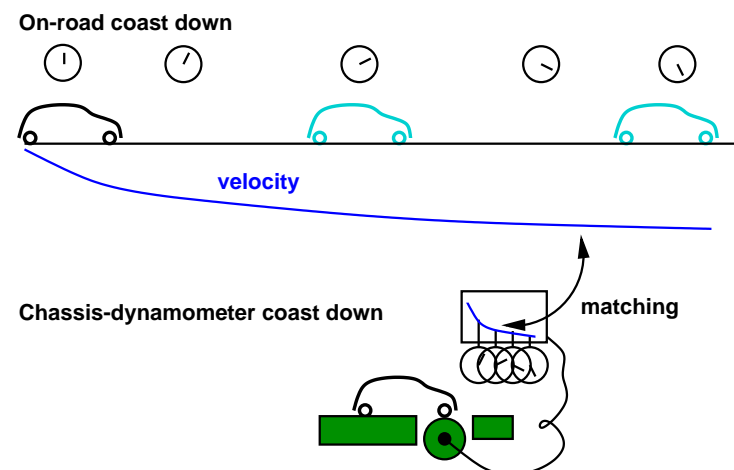


Figure 18": The best guarantee that the road-load settings are appropriate, is if the coast-down test is repeated on the chassis dynamometer, with the same total inertia. The coast-down test on the chassis dynamometer should follow the WLTP test immediately.

There are several alternative ways of matching the coast-down test and the chassis dynamometer settings. Also, traditionally values are reported which exclude the tyre rolling resistance. These different approaches allow for flexibilities in the settings. Ideally, the coast-down test on the chassis dynamometer test will tell if all these settings add up to the appropriate net result.

The same roll-out times on the road and on the chassis dynamometer should be achieved only in the case of the same vehicle inertia. Roll-out times are inversely proportional with the inertia. Hence, in the case of a different inertia for both tests, it should be corrected for:

$$T_{\text{chassis-dynamometer}}/T_{\text{coast-down}} = (M+m_r)_{\text{coast-down}}/(M+m_r)_{\text{chassis-dynamometer}}$$

This is the correction applied to the coast-down. The carry-over to the chassis dynamometer is not fully covered.

3.2 Vehicle preparation

The vehicle must be in proper running order for a coast-down test. This includes removing parasitic braking, setting wheel alignment, and setting the tyre pressure. These factors are very important for the eventual road-load values. Other preparation includes the setting of inlet vanes, removal of optional fixtures such as antennae, and the setting of fixtures. Also cleaning the car may have a small effect of the air flow friction.

The wheel alignment was found to affect the rolling resistance substantially. For the tested vehicle, changing the toe-in from 0.2° to 0.0° reduced the rolling resistance by 6%. It is difficult to generalize this result, as limited information is available of the physical nature of the effect. The findings from the validation program may not apply to other tyres and suspension.. Instead it would be appropriate to test the vehicle with the maximal value away from upright and parallel wheels, in the range prescribed by the manufacturer.

WLTP text proposal:

The alignment of the wheels: toe-in and camber, should be set to the maximal deviation from the parallel positions in the range of angles defined by the manufacturer. If a manufacturer specifies a set value, with a tolerance, this value may be used.

Discussion in WLTP IWG resulted in an adoption of the following text in WLTP gtr Phase 1b:

"4.2.1.7.3 Wheel alignment

Toe and camber shall be set to the maximum deviation from the longitudinal axis of the vehicle in the range defined by the manufacturer. If a manufacturer prescribes values for toe and camber for the vehicle, these values shall be used. At the request of the manufacturer, values with higher deviations from the longitudinal axis of the vehicle than the prescribed values may be used. The prescribed values shall be the reference for all maintenance during the lifetime of the car.

Other adjustable wheel alignment parameters (such as caster) shall be set to the values recommended by the manufacturer. In the absence of recommended values, they shall be set to the mean value of the range defined by the manufacturer.

Such adjustable parameters and set values shall be recorded."

3.3 Vehicle conditioning

The vehicle is prepared for coast down by driving at a high velocity for at least 20 minutes. The result is a warming up of the components of the vehicle. The lubricants will be warmer, but also the tyres will be warmer and the tyre pressure increases. Furthermore, the engine block will be warm and will radiates heat throughout the test. In practice, it is very difficult to control these heat transfers throughout the test. Testing on a colder test track surface, or testing in sunnier conditions, will all affect the loss of heat and thereby the tyre temperature. The only way to standardize the test is to measure the tyre pressure sufficiently often throughout the test, and correct for the tyre pressure.

WLTP text proposal:

The tyre pressure during the test is increased due to the preconditioning. This pressure increase must be appropriate for the preconditioning driving. During the test moderate driving, maximal velocity appropriate for the coast-down velocities, limited braking, and limited exposure of the tyres to heat must be maintained.

The lubricant oil of the driveline in motion during coast down can also be affected by specific heat transfer conditions. However, this effect is considered secondary to the effect of the actual tyre pressure during the test.

3.4 Coast-down test

During the test, fuel is consumed which decreases the weight of the vehicle. If the test is divided in four parts, and ten repetitions of each are needed, the fuel consumption of such a test may already be as high as 5-10 litres for a passenger car, which weight differences on a 1,200 kg vehicle are not fully negligible. However, no correction of the test result or adaptation of the WLTP procedure is proposed, as the impact is much smaller than the observed test to test variations in coast-down times.

Two major aspects affect the outcome of the individual coast-down tests: Firstly, the local wind conditions, both in the point of time and the position along the track, which can be 3 kilometres long. Secondly, the tyre pressure, which will fluctuate with the internal temperature. The tyre pressure can be 10%, or more, higher during the test than prior to the conditioning. The amount of heat dissipated in a tyre, at high velocities, can be close to 1,000 Watt. At lower velocities, the amount of heat is less; proportional with the velocity. The internal heat is not simply lost. Hence high temperature and the resulting high tyre pressures will affect the outcome of the test. Considering most energy lost though rolling resistance is heat, the heat production can be estimated. The generated heat per tyre is approximately:

$$\text{Heat [W]} = 2.725 * \text{RRC} * M_{\text{tyre}}[\text{kg}] * v[\text{km/h}] \sim 4-8 * v[\text{km/h}]$$

where M_{tyre} is the weight on the tyre.

Most kinetic energy dissipated in the tyre rolling resistance is converted to heat, with only a small amount dissipated as noise, or transferred as vibration to the vehicle.

Tyres are heated through three main processes:

- First, the viscoelastic deformation of the tyre, converting work into heat. Most of the rolling resistance is converted in this manner;
- Second, the contact of the tyre profile with the road surface, causing local deformation of the tyre; and
- Third, the friction of the tyre on the road. A large amount of energy can be converted to heat in this manner, which, however, requires slip of the tyre over the surface. This slip is common for bends, but not so much so in forward motion, i.e., rolling of the tyre.

Furthermore, the tyre can be heated or cooled by the surroundings. This heating or cooling results mainly from road surface contact, air convection, solar radiation, radiation from the engine block and heat transfer from brakes.

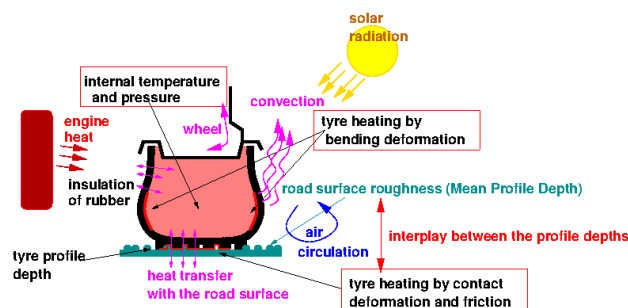


Figure 19: The heat generation and heat transfer of a tyre is a complex process with many variables which cannot be determined easily.

Rubber has a low heat conductance, such that 1,000 Watt heat transfer across the rubber may yield a temperature difference of 60-80 degrees Celsius. The associated tyre pressure increase is 20%. This is confirmed by the validation measurements. The outer surface of the tyre may be lukewarm, but this is not a proper indication of the temperature inside the tyre, and the associated tyre pressure which varies with internal temperature.

A vehicle driving up and down a straight test track and turning at each end, will have a different intermediate velocity profile between coast-down test than a vehicle on an oval test track, where in the bends not only can high velocities be achieved, but also the friction from the lateral force can be substantial. Furthermore, the low velocity coast-down tests may or may not have in-between accelerations to high velocity. As a result it is almost impossible to prescribe the driving which leads to the tyre pressure. Instead the tyre pressures must be monitored at regular intervals.

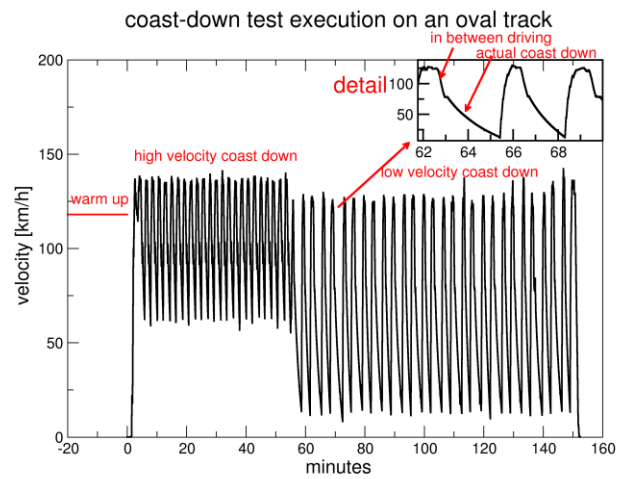


Figure 20: Typical test execution may take more than two hours to reach the prescribed accuracy of 3%. The warm-up or pre-conditioning is less relevant for the state of the tyre in the second half of the test.

4 Ambient conditions

4.1 Weather

One important aspect of weather is the air density, which yields the air drag, especially at higher vehicle velocities and higher turbulence. Air density is affected by the altitude, the atmospheric pressure, the humidity, and the temperature. Another aspect is the humidity. The presence of water vapor in the air affects the composition and such the air density and the air viscosity.

4.1.1 Temperature

Temperature affects both the air density and the air viscosity, in an opposite manner. See Figure 21. Both affect the air drag of the vehicle. The density affects drag in a rather straightforward manner when the vehicle velocity is high, but viscosity will play a more complex role, both in the flow friction on vehicle surfaces by laminar flow, by the onset of turbulence (e.g. at the A-style in the case of side wind), and the flow separation at the rear of the vehicle.

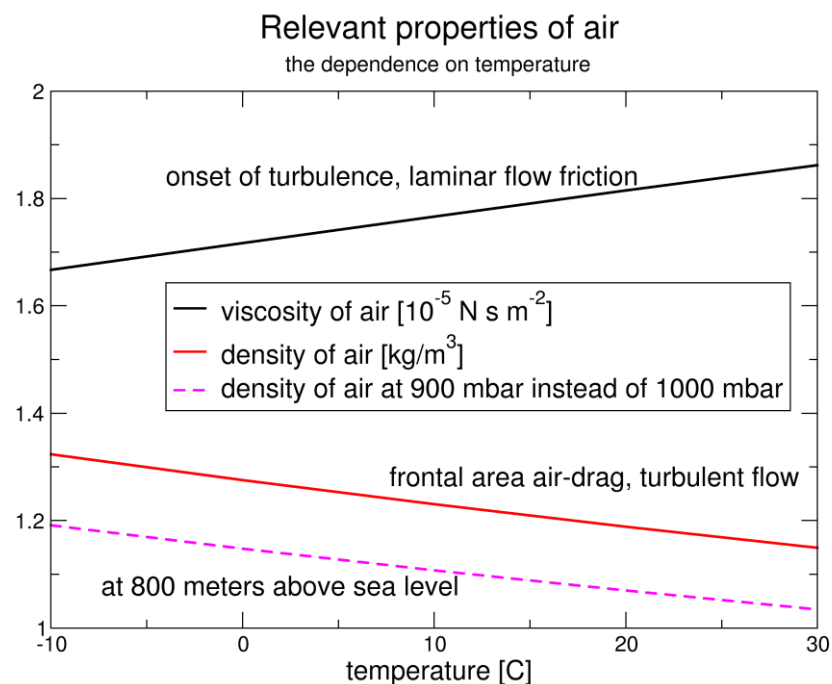


Figure 21: The viscosity and density of air as function of temperature. Density is also affected by altitude, viscosity is not.

4.1.2 Air pressure

The air-pressure is mainly affected by the altitude, as the column of air decreases with altitude. A square meter column of 100 meter contains typically 129 kg air at 0° Celsius, which exerts a pressure of 1,265 Pa below. This is 1.25% of the total atmospheric pressure. Hence 800 meters altitude will decrease the air pressure and air density by about 10%. The situation is slightly more complex, as the temperature

also decreases due to adiabatic relation between the air in the column, which results in a lower temperature at higher altitudes. On the other hand, as the density decreases with the altitude, so the column weight also decreases.

The air pressure itself may fluctuate with the weather, with times of stable high pressure alternating with times of low pressure fronts. The normalized sea-level air pressure is 101.325 kPa. The maximal range of air pressure variation, at the weather station at sea level close to the main test track is between -14% and +7%, however typical fluctuations in the air pressure are -2% and 2% around the standard air pressure.

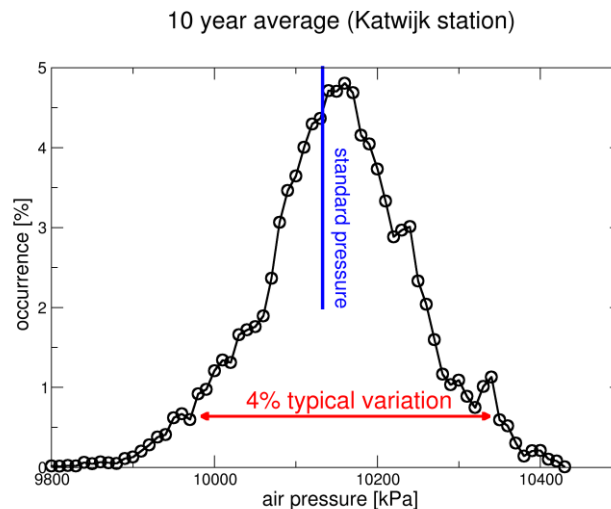


Figure 22: The average over 2000-2010 of the air pressure at the location of the Katwijk test track. The variations are limited and evenly distributed.

The normal air pressure used in the WLTP text is 100 kPa. At sea level it is at the edge of the distribution in Figure 22, however, at an altitude of about 110 m, the average air pressure is around 100 kPa. The latter value is used as reference in the WLTP text. This value is appropriate for European conditions, suggesting testing at a higher altitude than sea level.

4.1.3 Air composition

At high temperatures, the water vapour content of air may be substantial: 4.1% at 30° Celsius, and 7.3% at 40° Celsius. This will lower the air density slightly, as water vapour has 37.7% lower density than air. Hence, the maximal net effect of high humidity is 1.5% at 30°, and 2.6% at 40° Celsius. This is for 100% relative humidity. In saturated airmist or fog may form, which increases the density again. The latter is unfavorable for the air drag. The variation of the viscosity with the water vapor content is expected to be maximal in the order of 2%, based on the mixing rule of Wilke, where the viscosity of water vapor is lower than that of air, and an increase in relative humidity decreases the viscosity. Since the viscosity, i.e., the wall friction for laminar flow, is only a minor part in the total air drag, the impact of humidity on viscosity can be discounted.

For the relationship between the relative humidity and the absolute water vapour content in air, the approximation on Antoine is often used.

$$P_{\text{vapour}}[\text{bar}] = 157000 \cdot 10^{-1730.63/(233.46+T[\text{C}])}$$

See Figure 23.

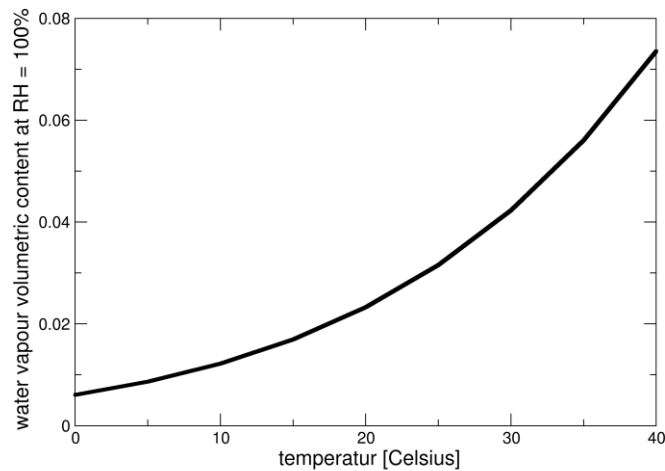


Figure 23: The absolute molar water content of saturated air for different temperatures.

The water vapour content can be used to adjust the air density with relative humidity and temperature:

$$P_{\text{vapour}}/P_{\text{ambient}}$$

The fraction of water vapour is multiplied with the ratio of densities to arrive at the density ratios:

$$\rho/\rho_0 = 1 - 0.37 \cdot P_{\text{vapour}}/P_{\text{ambient}}$$

Using dry air as a reference will only affect the air density at the reference temperature by a small amount. At 300 K the water vapour content is still limited resulting in 0.2%-0.3% density variations with varying humidity.

WLTP text proposal:

The air-drag must be compensated for the deviation of the air density. The air density is proportional with pressure p and inversely proportional with temperature T , such that the observed air drag is compensated with factor $(100/p) \cdot (T/300)$. Furthermore, the air drag must be compensated for the presence of water vapour through a factor $1 + 0.37 \cdot P_{\text{vapour}}/P_{\text{ambient}}$, assuming the standard condition is dry air.

"4.5. Correction to reference conditions**4.5.1. Air resistance correction factor**

The correction factor for air resistance, K_2 , shall be determined as follows:

$$K_2 = \frac{T}{293} \times \frac{100}{P} \times \left(1 + 0.37 \times \frac{P_{\text{vapor}}}{P}\right)$$

where:

T is the mean atmospheric temperature, K;

P is the mean atmospheric pressure, kPa;

P_{vapour} can be either measured directly or determined from the relative humidity (RH) measurement by the formula
 $P_{\text{vapour}} = \text{RH} \cdot 15700000 \cdot 10^{-1730.63 / (-39.67 + T[\text{K}])}$, kPa;"

Note: outcome is exactly 101.39 kPa at 100 °C and RH=1.

4.2 Wind

Wind is one of the most dominant uncontrollable aspects which affects the coast-down results. For European on-road conditions the effect for a single direction is about 10% on the coast-down times and road loads. For a round trip: both directions, the net effect is much smaller. It is estimated to be in the order of a few percent. This depends very much on the vehicle velocity and shape.

4.2.1 Wind speed

For meteorological data, the wind speed is measured at 10 metres, or 30 feet, above the ground level. The wind velocity at 10 metres is higher, and more constant than at 0.5-1.5 metres height, which is relevant for the air drag of vehicles. Measurements at 0.7 metres height show a larger variation in wind speeds and wind direction compared with the meteorological station Katwijk, from the Dutch Meteorological Service (KNMI), nearby at 100 metres distance and at 10 metres high.

The relation between wind speeds at different altitudes is not fixed, but dependent on the meteorological conditions. Stable conditions, with a small temperature

gradient will typically yield a sharper decline of wind speeds with altitude than unstable conditions. From the theory of boundary layers, such generic results can be inferred.

4.2.2 *Wind direction*

Side wind always adds to the driving resistance of the vehicle. The wind parallel to the vehicle direction has both positive and negative effects. These effects are largely both opposite, such that by adding the forces of both the “a” and “b” runs together, only a smaller negative net force remains. Hence small variations in the wind between the “a” and “b” run will introduce a large uncertainty in the outcome of the coast-down. For example, at 3 metres per second head wind, the air drag at 55 km/h is 44% higher. On the return trip the drag is 36% lower, yielding a small net effect of 4%. In many circumstances it is the largest source of uncertainty during testing.

4.2.3 *Wind gustiness*

Due to the turbulent nature of wind, variations in wind velocity and wind direction exist at every time-scale: hours, minutes and seconds. Unhindered by the surface of the terrain the air-flow follows the isobars to the high and low weather pressure field, due to the Coriolis force. The friction of the wind with the earth will turn the wind direction more towards the low pressure. Hence the surface roughness and the global high-altitude wind, from the pressure fronts, have an intricate interplay at ground level.

WLTP text proposal:

The wind velocity during the test must be measured and reported at regular intervals together with the timing of the test execution. Large time intervals in the test execution should not be correlated with wind gusts.

4.2.4 *Wind velocity profile*

The WLTP text prescribes wind measurements to be taken at a height of 0.7 metres. This is the appropriate height for vehicles during coast down. However, measurements at this height are severely affected by the local conditions, such as obstacles nearby and overall terrain roughness. Furthermore, the wind velocity profile is dependent on the height above the ground and the weather conditions. Given these factors, it is a complex problem to determine the precise effect of the wind, at the level and position of the vehicle.

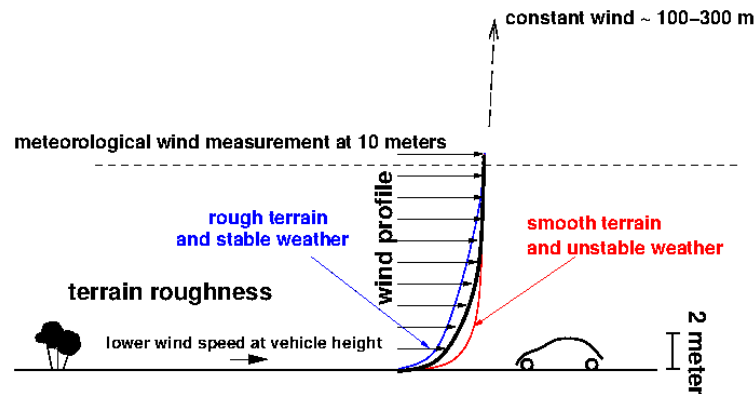


Figure 24: The wind velocity depends on the height above the terrain. This velocity profile is affected by many meteorological aspects and conditions.

Wind, its direction and its velocity profile, all affect the coast down results, probably in a more complex manner than can be determined with current knowledge. The air streams around the vehicle and the locations of slip and turbulence are difficult to control in detail. The presence of wind may lead to an air-flow separation from the ground, and force the air flow overhead, rather than around and below the vehicle, however this is speculation.

4.2.5 On-board anemometry

Ford motor company in the USA uses on-board anemometry to correct air drag for wind, in order to improve the accuracy of the coast-down results. However, this equipment is bulky, with a long boom ahead of the vehicle and a large propeller. Furthermore, the correction method is academic and complex, with fitting a fourth order polynomial, which may lead to unwanted effects outside the region in which the data is fitted.. The equipment should be scaled down for generic use to correct for wind, similar to the stationary wind correction. Moreover, such a method should not be applied at high wind speeds where the air streams around the vehicle are quite dissimilar from those for the case of a moving vehicle at low wind conditions.

4.3 Test track

4.3.1 Road surface

Road surfaces in Europe are designed to ensure sufficient grip during braking on a wet surface. A second criterion is limiting the amount of tyre noise. The fuel consumption, or rolling resistance, of a vehicle is given limited consideration in the road surface evaluation. This is despite the fact that the actual road surface may affect the rolling resistance significantly. The tyre labels are determined on a smooth drum, with the actual rolling resistance on the road being typically higher. Variations of the rolling resistance with road surface can be 20% or more.

The mean profile depth (MPD) is the most significant parameter, defining the road texture, which will affect the rolling resistance. The interplay with tyre profile and tyre pressure can be significant, but is, as yet unknown. Testing on different test tracks has led to an estimation of the difference in the rolling resistance between the best case and worst case rolling resistance surface of 24%, for high tyre profiles and low tyre pressures, typical for the WLTP test protocol.

4.3.2 *Road gradient*

The NEDC procedure averaged the up and down test times. This introduced an advantage to sloping test tracks. The gradient force, opposite for both directions, will yield to longer coast-down times downhill, than the time decrease in the uphill part. The average time of uphill and downhill on a sloping track is longer than the average time of a horizontal track. With the allowance of 0.5% slope, the gravitational force on a 1,200 kg vehicle is 59 N. With typically rolling resistances of 80-150 N the gravitational effect is substantial, and the estimate of the rolling resistance can be 10% lower, averaged over the work on the test.

In the WLTP the averaging is shifted from time T , to power (the reciprocal of time: $1/T$). This is still not completely in accordance with the physical principles, which associate gravitation with a conservative force, i.e., the same magnitude but opposite for opposite directions. For example, assuming a total inertia of 1,200 kg, a road load of $50 + 0.05 v^2$, a gravitational force of 60 N, and a coast down from 85 to 75 km/h. The two time constants are:

$$T_{\text{down}} = 38.87 \text{ sec and } T_{\text{up}} = 27.96 \text{ sec}$$

(See the appendix D for the details of such calculations.) The average time is 35.70 sec, compared to test on a flat track at 32.52. This results in a 10% lower road load at 80 km/h. Using the reciprocal times $0.5 \cdot (1/T_{\text{up}} + 1/T_{\text{down}}) = 32.52 \text{ sec}$, this differs only with the result of the flat test in the fifth decimal place (0.011%). This small difference is the result of a 'power approach' (WLTP) versus a 'force approach' (physically correct), and related to the distance travelled and the associated time. Generally, the unit of $1/T$ is appropriate to compensate for road gradient, but it is not exact. The largest deviations between both approaches are found at the lowest velocities. However, this will remain in the order of $1/1000$. Hence, averaging over forces would be exact, but averaging over power (or $1/T$) is a good proxy, within the limits of the allowed gradients and speed ranges. The error from a finite interval, e.g. 85-km/h to 75 km/h, to recover the road-load at the mid-value is in the same order.

The method of averaging over different 'a' and 'b' tests, and the successive tests, is not completely in line with the spirit that " $1/T$ " is the relevant quantity in the road-load determination. Immediate conversion to the $1/T$ [sec^{-1}] unit and the statistical evaluation with this new variable avoids confusion.

4.3.3 *Road undulation*

Test tracks are typically flat with very limited undulation. With higher tyre pressure the vibrations of the vehicle increases. Whether this will yield a higher or lower rolling resistance will depend on the vehicle dampers and suspension. The road undulation, or large scale variations, is expressed in the IRI (International Roughness Index). The IRI is related to the absorbed energy in vehicle vibration. A large IRI will increase the driving resistance of the vehicle. It is expected to be outside the scope of coast-down testing. However, in the translation to European on-road conditions it may have a place. The coast-down testing is expected to be optimal, when compared to normal European roads, in both the IRI and the MPD.

WLTP text proposal:

The road surface of the test track must have a texture, expressed in the mean profile depth, comparable to normal European tarmac roads. If the mean profile depth of the test track is substantially lower, an appropriate correction of the rolling resistance must be applied. If $MPD < 1.0$ of the test track, the rolling resistance is to be corrected:

$$F_0 = F_{0_{test}} (1 + 0.20 (1.0 - MPD))$$

$$F_1 = F_{1_{test}} (1 + 0.20 (1.0 - MPD))$$

5 Inertia

A coast down test is a balance between the inertial force, keeping the vehicle in motion, and the resistance slowing the vehicle down. If the inertia is higher it takes longer for the vehicle to slow down. Hence an accurate determination of the inertia is important to translate coast-down times into forces.

In the case that the coast-down is repeated on the chassis dynamometer, it will yield the appropriate settings of the chassis dynamometer. However, there are a few limitations:

- The vehicle weight should be identical to the dynamometer inertia settings if all axles are rotating
- The vehicle weight should be compensated for the rotational inertia of axles that are stationary on the chassis dynamometer test. The inertia settings must therefore be higher, to include the rotational inertia of wheels and axle that is stationary.

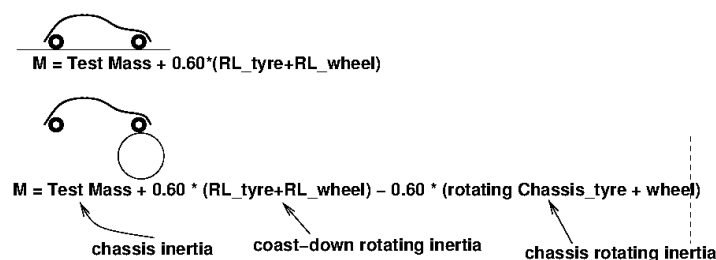


Figure 25: The appropriate translation of the rotating inertia on the road to the chassis dynamometer: accounting for the different wheels and tyres in both tests. In this case 60% of the weight of the wheels is used as rotating inertia.

Vehicle weight is very well specified in the test procedure, but rotational inertia is not. The general approximation is 3% of the vehicle weight for all rotational inertia. Whether the actual rotational inertia is higher or lower will affect the results in a complex manner. Different values, from different wheels, for coast-down and chassis dynamometer tests, will yield the largest deviations. During the coast down test, higher rotational inertia not included in the calculation, yield lower road loads. During the chassis dynamometer test, lower rotational inertia of the rotating axle, compared to the coast-down test, will yield lower forces during the emission test and will typically result in lower emissions.

5.1 Vehicle weight

Vehicle weight has two opposite effects in the coast down test. First, the resulting force from the coast-down times depends on the total inertia. The heavier the vehicles, with the same force, the longer the coast-down times. Second, the increase in weight will lead to an increase in rolling resistance. As a rule-of-thumb the rolling resistance is considered proportional to the vehicle weight. Deviations from the generic rule are dependent on both the tyre type and tyre pressure. The net result, however, is a longer coast-down time, and thus lower dynamometer

settings for the emissions test. However, the tolerances for vehicle mass that are included in the current WLTP gtr are sufficiently tight to negate the need for additional corrections.

5.1.1 *Weight balance*

The balance of the vehicle's weight between front and rear, and left and right, is expected to be of some influence. Most generic formulae for coast down do not take into account the effect of weight imbalances. Adding 50 kilograms to the front wheels, which is subtracted from the rear wheels, will yield the same rolling resistance based on the tyre label:

$$F = RRC * (M_{\text{front-left}} + M_{\text{front-right}} + M_{\text{rear-left}} + M_{\text{rear-right}}) = RRC * M_{\text{vehicle}}$$

5.2 **Weight balance only has a minor influence on coast-down and therefore it has not been considered for further analysis."**Rotating inertia

Rotating inertia is the additional kinetic energy stored in the rotation of parts. This is kinetic energy on top of the forward motion of the center-of-mass of the rotating part. Rotating inertia can be from parts of the driveline, but the wheels and tyres also add to the rotating inertia. An axle will have a small contribution to the rotational inertia due to the small radius. For a solid disk or bar the rotating inertia is:

$$m_r = 0.5 * m_{\text{disk}} * (R_{\text{disk}}/R_{\text{wheel}})^2$$

For a ring the rotating inertia is:

$$m_r = m_{\text{ring}} * (R_{\text{ring}}/R_{\text{wheel}})^2$$

The generic formula for a disk and a ring are the same, apart from the form factor ξ in front: $\xi_{\text{disk}} = 1/2$, $\xi_{\text{ring}} = 1$.

For an axle of 20 kg and an outer radius of 5 cm, the associated rotating inertia is less than a kilogram. For wheels the radii ratio ($R_{\text{part}}/R_{\text{wheel}}$) is 1, and the radial mass distribution is somewhere in between that of a disk and a ring, such that the associated rotating inertia is:

$$m_r = \xi * m_{\text{wheel}} \sim 0.6 * m_{\text{wheel}}$$

The form factor ξ can vary with the type and shape of the wheels and tyre. However, it is expected that ξ lies between 0.60 and 0.75, even for extreme designs. Hence, from weighing the wheels and tyres, a good indication of the rotating inertia can be obtained. Typical wheel and tyre weights encountered for passenger cars are in the order of 8 kg for the wheel and 8 kg for the tyre. The total weight is therefore 64 kg, with an expected rotating inertia of 45 kg. This is 3% of the weight of a vehicle of 1500 kg. Hence, the WLTP rotating inertia seems to be underestimated somewhat, as cars with 64 kg of wheels and tyres are typically lighter and, in particular, since the other rotating parts such as the axle, brakes, differential, etc. are not included in the rotational inertial mass.

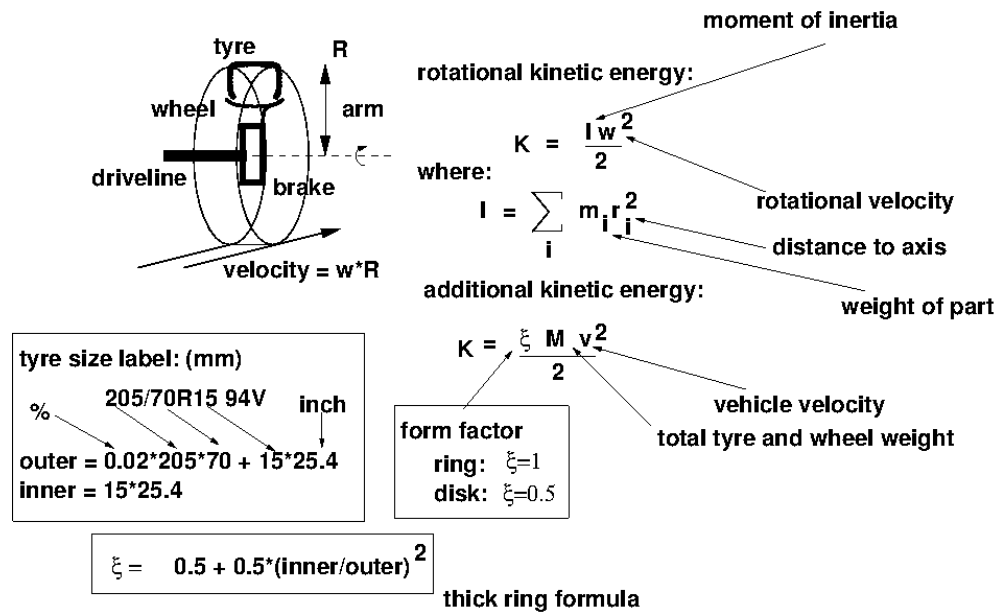


Figure 26: Summary of the physical principles and approximations for determining the rotating inertia.

The tests carried out on two sets of tyres and wheels yield slightly smaller values. The rotating inertia varied between $\xi = 55\%$ and $\xi = 65\%$ of the weight. The small rim tyre yielded the largest form factor ξ .

5.2.1 Tyre inertia

A more complicated approach than “adding 60% of the tyre and wheel weight as rotating inertia” can be applied. Separating the wheel and tyre weights and resulting rotating inertias is the most logical choice. This is because the tyre provides the largest contribution to the rotating inertia due to the larger average radius, despite the tyre typically being somewhat lighter than the wheel. The tyre is the largest contribution to the rotating inertia due to the larger average radius, despite the tyre typically being somewhat lighter than the wheel in a small survey on available tyres and wheels for a number of vehicle models.

5.2.2 Wheel inertia

Wheel inertia includes the flange and the rim. This is the part taken off the vehicle, e.g. when replacing the tyre. The brakes, with some rotating parts, are not part of the wheel. The brakes do have considerable weight, however the radius is much smaller than the wheel and so the impact on rotating inertia is limited. Nevertheless all rotating parts contribute in some extent to the rotation inertia and therefore neglecting brakes and driveline means neglecting part of the rotating inertia. Hence, an estimate of rotating inertia based on just the tyre and wheel weight should be on the high side in order to compensate for rotating inertia from these additional sources.

5.2.3 Driveline inertia

In the testing, very little difference was found in the inertia between the front axle attached to engine via the differential and the rear, free running wheels. This confirms the limited contribution of the driveline to the total inertia. The weight of the

driveline is substantial and the rotating velocity is similar to the wheels after the transmission. Hence the smaller radii, compared to the radius of the tyre, is the determining factor leading to the minimal contribution of the driveline to the total rotating inertia.

WLTP text proposal:

The rotating inertia at the coast down test and the chassis dynamometer test are to be determined by weighing the wheels and tyres. 60% of the weight of all tyres and wheels shall be the rotating inertia to be used. Different weights between the coast down test and chassis dynamometer test due to special tyres or wheels to be used, e.g. to avoid slip on the drum of the dynamometer, must be compensated for by adjusting the chassis dynamometer settings.

"4.2.1.5. Weighing

Before the road load determination procedure, the driven and non-driven test wheels shall be weighed separately.

Before and after the road load determination procedure, the selected vehicle shall be weighed, including the test driver and equipment, to determine the average mass, m_{av} .

...

7.2.1. Inertia mass setting

The driven and standing wheels shall be weighed separately.

The equivalent inertia mass of the chassis dynamometer shall be set to the test mass if a dual-axis chassis dynamometer is used. If the total mass of the driven wheels is lower than the mass of the test wheels used for the road load determination, derived in paragraph 4.2.1.5. of this Annex, the equivalent inertia mass shall be increased with 60% of the total mass difference.

In the case that a single-axis chassis dynamometer is used, the equivalent inertia mass shall be increased by the equivalent inertia mass of the non-driven wheels used for the road load determination, derived in paragraph 4.2.1.5. of this Annex ~~standing wheels or by 1.5 per cent of the sum of the mass in running order and 25 kilograms.~~ If the total mass of the driven wheels is lower than the mass of the driven test wheels used for the road load determination, derived in paragraph 4.2.1.5. of this Annex, the equivalent inertia mass shall be increased with 60% the total mass difference.

If the chassis dynamometer is not capable to meet the inertia setting exactly, the next higher inertia setting shall be applied with a maximum increase of 10 kg."

6 Rolling resistance

6.1 Tyre

The tyre is the major source of rolling resistance of the vehicle. The balance between achieving comfort, safety, and fuel economy is a complex one. In a simple approach the vertical indentation 'z' of the tyre is such that the contact area and tyre pressure combine to withstand the force on the tyre from the vehicle weight:

$$z = L^2/(8R)$$

where L is the length of the contact, and R the outer radius of the tyre. Given a tyre pressure p and a tyre width w:

$$p \cdot L \cdot w = g \cdot M/4$$

For a typical weight on a single tyre of 400 kg and a tyre pressure of 2.2 bar, the area (L*w) is 180 cm².

This formula is adjusted for rim stiffness of the tyre, which is independent of the tyre pressure. However, a major part of the tyre stiffness, the relation between pressure and indentation, is the result of tyre pressure. It means that the indentation 'z' of the tyre depends on the square of the tyre pressure, in a simplistic manner:

$$z = (g \cdot M)^2 / (128 w^2 p^2 R)$$

The indentation 'z' is a measure of the energy absorbed in the tyre. Part of this energy is converted to heat, whilst part is elastic as the tyre will resume its original shape as the indented part is rotated away from the contact with the road.

The relation is complex, yet empirical investigations suggest that the relationship between absorbed energy and tyre properties is grossly linear:

$$W \sim g \cdot M / (w p R^{1/2})$$

This forms the basis of existing WLTP corrections on the rolling resistance, e.g. mass correction, and it may serve to augment the method to include pressure related corrections. The linear relation suggests energy loss due to flexural deformation of the tyre. In the case of compression, only the deformation, and losses, are expected to be proportional to the indentation z, and p⁻². On the other hand, "rubber compression" suggests a substantial tyre stiffness and a limited pressure dependence.

It is clear that the correction for the variation in tyre pressure is not identical for all tyre types. A large variation in results exists, also in the literature. A simple relationship, between tyre pressure and rolling resistance combined with a limited range of pressure variation, is the best recipe for a robust approach.

6.1.1 Tyre indentation

The tyre indentation is associated with compression and flexural deformation of the tyre. The tyre wall bends outwards between wheel and road. The rubber is elastic by nature. Hence, the greater part of the elastic energy is released as the tyre rolls on and the shape expands to its original form. A minor part is not released. This phenomenon is called hysteresis: the difference in force between compression and release. Typically, 10%-20% of the energy is absorbed as heat.

This depends on many aspects, such as rubber composition, i.e., the amount of carbon, the type and magnitude of the stresses, and the rate and speed of deformation.

6.1.2 *Tyre contact deformation*

Tyre profile and road surface roughness have a complex interaction. The resulting contact deformation is a second source of rolling resistance, along with the tyre indentation under the vehicle weight. Unlike the indentation, the majority of the energy in the contact deformation can be expected to be lost in vibration, noise and heat. Contact deformation is not a global, or coherent, deformation, such that the release of contact deformation does yield a useful force. Given the tread restriction in the WLTP, to 80% or more of the original tread, the contact deformation can be expected to be significant. With a lower tread the rolling resistance decreases, hence this part of the rolling resistance must be related to the contact deformation. A smooth road surface may limit the effect somewhat, as the contact deformation is more evenly. The combination of the low tyre pressure and high tyre tread in the WLTP test can lead to a major effect of the road surface roughness on the road load. The complex interplay of the three aspects (road surface, tyre pressure and tyre tread) is not easily disentangled. Instead, some requirement for the characteristics of the road surface of the test track, as already exists for tyre noise testing, may be appropriate.

6.1.3 *Tyre pressure during the coast down testing*

After other effects are quantified and corrected for, tyre pressure remains the significant factor in rolling resistance. The set pressure with a tyre at rest and at ambient conditions is only one of the aspects which determine the rolling resistance in a particular coast-down test. From testing it has become clear that tyre pressure may vary greatly between seemingly similar tests. It is influenced by external circumstances, such as sunlight and precipitation. However, it is also affected by the test execution. For example, intermediate driving at different velocities, e.g., in the bends of an oval test circuit, or between coast downs on the straight tracks, causes systematic deviations of more than 0.1 bar in tyre pressures.

WLTP text proposal:

The rolling resistance, measured according R 117, of the tyre used from the prescribed tyre class must be corrected back to the class value from the table, in the case that only the class value is reported:

$$F_{0\text{corrected}} = F_{0\text{test}} * RRC_{\text{class}}/RRC_{\text{test}}$$

6.2 **Drive line resistance**

Driveline resistance is the result of friction in the bearings and the differential. Quite often 5% or 10% of the total work of the engine does not reach the wheels, but is lost in the driveline. The transmission, or gear-box, will account for a major part of the loss. The bearings and differential are a smaller part of the driveline loss, however it is the part that remains in the coast-down test as the transmission is disengaged.

Bearings are well-examined, but lubricants are a high-tech product, where temperature and velocity dependence of the viscous friction is tuned by specific non-Newtonian fluid properties. Generally a bearing will have an offset friction at low speed to ensure the absence of metal-metal contact and high wear, but the friction will increase somewhat as the rotational velocity increases. The complexity of lubricated driveline losses lies in part with the lubricant film thickness which may vary with speed and temperature.

It must however be noted that the mechanical design, including bearing, are made to match the maximal forces encountered. The coast-down test and vehicle test mass are at the lower end of the force spectrum of normal usage. The resulting proportionally higher friction may partly be compensated for by using thinner, less viscous, lubricants, which might be less suitable for normal vehicle operation where the high forces may be encountered.

The driveline resistance of the test vehicle was estimated at 9.9 Newton per wheel at the driven axle, and 2.3 Newton per wheel at the free-running axle. In total this accounts for 14% of the total rolling resistance of the vehicle, which is not a negligible fraction. With four-wheel drive, assuming the friction is the same for every driven axle, the additional driveline resistance is 60% higher: up to 23%, from 14%, of the total rolling resistance.

6.2.1 *Lubricants*

Lubricants are an art in themselves. The non-Newtonian fluid with specific temperature dependence is used to ensure proper operation under a wide range of conditions. The relative velocity of the lubricated parts generates a lubricant film. Hence with low velocity the film thickness can be small. Furthermore, the friction can increase the temperature which will also affect the rheological properties. No detailed assumptions have been made, however the frictional torque of rotating parts will have a major constant part and a small increase with velocity. The size of the velocity dependency will depend on the design of bearings and other driveline elements.

6.2.2 *Cogging*

Apart from constant friction of the rotating parts with film lubrication, chain wheels and differentials can have energy losses due to cogging. Cogging is, for example, the variable force and motion with the contacts of the teeth in chain wheels. With lower rotational velocities this type of loss will be significant, as it will lead to velocity variations in the driveline. The increase in rolling resistance at very low velocities is not currently included in the coast-down test, and part of the dynamometer test. It is not expected the driveline losses due to cogging, for example in the transmission, can be varied systematically during the test. Hence the effect on coast-down testing will be ignored.

7 Air-drag

At velocities above 40-60 km/h the air drag will dominate the total driving resistance of the vehicle. The generic assumption for air-drag is a quadratic dependence of the force on the velocity:

$$F = \frac{1}{2} c_D A \rho v^2$$

where A is the frontal area, v the vehicle velocity, ρ the density, and c_D the drag coefficient, varying between for a modern passenger car between $c_D \sim 0.25$ and $c_D \sim 0.4$.

The major part of the road load, especially at higher velocities, is determined by this relationship. However, the drag coefficient c_D is the result of 'tweaking' the vehicle shape to limit the obstruction of the air flow around the vehicle. Deviations from the v^2 dependence are observed and are related to flow separation and the onset of turbulence. At high velocity the flow is fully developed and the relationship above is remains true up to velocities reaching the speed of sound. At the lower velocities the complications arise, from a varying air flow and turbulence with velocity. However, these complications have a limited effect on the coast down forces as the contribution of the air drag to the total road load is also limited.

7.1 Vehicle model variations

There exists a large amount of anecdotal information in, for example, the media, relating to the reduction of air drag during the coast down test. This includes the taping of seams at the bonnet and head lights, the removal of mirrors, etc.. Within the legal text there are a limited number of possibilities to actually make such adaptations. Some adaptations are obvious allowed optimizations, such as cleaning the car, and others are at the boundary, with only a few adaptations tested being considered to be beyond the freedom within the interpretation of the text. The removal of the kerb-side mirror, for example, is in the latter group.

7.1.1 Wheels

The open or closed structure of the wheel will affect the air drag of the vehicle. A completely closed wheel hub may have a higher drag than a slightly open wheel hub, but all in all, the more open the wheel hub, the higher the air drag is expected to be. The total power, $P_{\text{through flow}}$ [W] dissipated in flow through any part of the vehicle is:

$$P_{\text{through flow}} = \Delta P * Q$$

where ΔP [Pa] is the pressure drop and Q is the total volumetric flow per second [m³/s].

For a large range of settings the pressure drop changes little with the actual setting, but the flow increases with the open setting. Hence it is appropriate to use the most open setting in the coast down test, for parts of the vehicle which have a through flow.

WLTP text proposal:

The aerodynamic drag is closest to worst case with the maximal flow through the vehicle body parts. Hence, the most open settings and design shall be used during coast-down testing. In particular, grill vanes shall be fully open to allow for the maximal flow through the radiator. If detailed information of vane operation during normal operation can be provided, these settings may be used instead.

7.1.2 *Tyres*

The width of the tyre affects the air drag of the vehicle. The fact that the tyres rotate in between the moving vehicle and the stationary road, complicates the air stream around the vehicle. However, in the case of an option of different tyres, the widest tyres should be selected for the coast-down test.

WLTP text proposal:

With the freedom to choose different tyres, on the basis of their rolling resistance, the widest tyre with the smallest rim shall be chosen on the basis on aerodynamic drag.

7.1.3 *Fixtures*

Vehicle fixtures come in a wide variety. Many should be considered to form part of the vehicle model. For example, different bumpers or door handles are not expected on the same vehicle model. Some fixtures however are optional, for example the antenna for the radio, whilst the kerb-side mirror could, in the past, be considered a borderline case for an optional fixture. The combination of closed wheel hubs, and the removal of the kerb-side mirror and the antenna, gave an effect of 4% reduction of the air drag.

7.1.4 *Settings*

The settings of the movable, or changeable, parts of the vehicles were already mentioned in the case of the wheels, where the open wheel or hub is likely to have more air drag associated with it. Other settings affecting the air drag are those affecting the flow through and around the vehicle. Windows can be kept closed during testing, but the grill, for cooling the engine via the radiator, should be kept open. A substantial effect of 10% on the total air drag is found between open and closed grill vanes, or slats. Therefore, it is expected that the worst case settings are those with the largest through flow, i.e., the most open structure of the vehicle.

8 Literature

Literature used:

1. *Dubbel, Handbook of mechanical engineering* (eds. W. Beitz and K.-H. Küttner), Springer 1994
2. *American Institute of Physics Handbook*, McGraw-Hill 1972.
3. *Aerodynamics of road vehicles*, W.-H. Hucho, SAE publications 1998.
4. *Bosch Automotive Handbook*, Wiley 2010.
5. Perry and Chilton, *Chemical Engineers' Handbook*, McGraw-Hill 1972.
6. ACEA: *White book on CO2 declaration procedure HDV*; ACEA Workinggroup-CO2HDV; January 2014
7. MAC: Hausberger S., Vermeulen R. et.al: *Draft technical annex for a test procedure on air conditioning systems from LDV*; Version 2.6. (28-02-2014)
8. IVT: *Thermodynamic Scrip* ; Institute for Internal Combustion Engines and Thermodynamics TU-Graz; 2013
9. Rexeis M., Hausberger S., Kühlwein J., Luz R.: *Update of Emission Factors for EURO 5 and EURO 6 vehicles for the HBEFA Version 3.2*. Final report No. I-31/2013/ Rex EM-I 2011/20/679 from 06.12.2013.
10. *UN ECE: Proposal for a new UN Global Technical Regulation on Worldwide harmonized Light vehicle test Procedures (WLTP)*; ECE/TRANS/WP.29/GRPE/2013/13; Draft from 17th September 2013;
11. Rune Karlsson, Ulf Hammarström, Harry Sörensen, and Olle Eriksson, *Road surface influence on rolling resistance coastdown measurements for a car and an HGV*, VTI 2011.
12. Ulf Hammarström, Rune Karlsson, and Harry Sörensen ,*ECRPD Road surface effects on rolling resistance: coastdown measurements with uncertainty analysis in focus*, VTI, 2009.

9 Signature

Delft, 13 July 2015

TNO

A handwritten signature in blue ink, appearing to read 'Willar Vonk', written over a faint circular stamp.

Willar Vonk
Project leader

A handwritten signature in blue ink, appearing to read 'Norbert E. Ligterink', written over a faint circular stamp.

Norbert E. Ligterink
Author

A Abbreviations

A.....	Cross sectional area [m ²]
a.....	Acceleration [m/s ²]
AT	Automatic transmission
BSFC	Brake specific fuel consumption [g/kWh]
C _D , C _w	Air drag coefficient [-]
C _x	Concentration of a component x in the exhaust gas [ppm]
DIN.....	Deutsches Institut für Normung
EGR	Exhaust gas recirculation
FC	Fuel Consumption
F0, F1, F2.....	Road load polynomial fit in [N], [N/[km/h]], [N/[km/h] ²]
LDV	Light Duty Vehicle
m _{ref}	Kurb weight of the vehicle [kg]
m _{low}	Test mass low in WLTP [kg]
m _{high}	Test mass high in WLTP [kg]
M.....	Generic test mass
m _r	Rotational inertia expressed as additional weight [kg]
MT.....	Manual transmission
NEDC.....	New European Driving Cycle
PHEM	Passenger car and Heavy duty Emission Model (vehicle longitudinal and emission model from TUG)
P _{wheel}	Power at the wheel of a vehicle, i.e. sum of driving resistances [W]
R ₀ , R ₁ , R ₂	Road load from air and rolling resistance in [N], [Ns/m], [Ns ² /m ²]
RRC.....	Rolling Resistance Coefficient of tyres [-] (ratio of forces)
RH.....	Relative Humidity [%]
p.....	Pressure [bar]
Pe.....	Effective power of the engine [W] or [kW] as specified
P _{rated}	Rated engine power [[W] or [kW] as specified
SOC	State of charge of the battery [kWh] or [kWs] as specified
t.....	Temperature [°C] or time [sec]
T.....	Temperature [°K]
T.....	Coast down time [sec]
v	Vehicle velocity [km/h] or [m/s] as specified
W.....	Work over the cycle, usually in this document given in [kWs]
WLTC	Worldwide harmonized Light duty Test Cycle
WLTP	Worldwide harmonized Light vehicles Test Procedure

ρ density [kg/m³]

ΔFC Extra fuel consumption (unit as stated in equation)

ξ Form factor [%] relation between weight and rotational inertia

B Standard conditions

Commonly, standard conditions are defined by the scientific community to compare results from different experiments. The conditions used in the WLTP text are the STP (Standard Temperature and Pressure) conditions. However, common ambient standard conditions are usually the NTP (Normal Temperature and Pressure) conditions, at higher pressure and temperature, which is closer to the average mondial values.

Table 12: The standard conditions

Condition	Temperature	Pressure	Humidity
STP	0° C [273.15 K]	100000 Pa	Not specified
NTP	15° C [288.15 K]	101325 Pa	0% RH
WLTP coast down	16.85° C [300 K]	100000 Pa	Not specified

Furthermore, the gravity is set at $g = 9.81 \text{ m/s}^2$ and the gas constant at $R = 8.31 \text{ J mol}^{-1} \text{ K}^{-1}$.

C Application of the correction methods on chassis dyno tests

In total 4 cars have been measured on the chassis dynamometer of TUG to develop and to validate correction functions for the chassis dynamometer tests. Two of the vehicles are diesel cars and two are petrol cars. Two of the vehicles have been measured completely from the budget of the actual study, for two cars the base vehicle set up was funded by other projects and just the additional test days have been allocated to the actual study. The vehicle parameters are described in the following table. Makes and models are not stated here since the road load values have been provided by the OEMs under confidentiality agreement.

Table 13: Overview on the passenger cars tested at TUG

		TUG 1	TUG 2	TUG 3	TUG 4
Engine	-	Diesel	Diesel	Otto	Otto
Euro class	-	EU5	EU6	EU5	EU5
Transmission		manual	manual	manual	manual
Max. power	[kW]	120	130	100	90
Kerb mass (DIN)	[kg]	1600	1700	1350	1650

Additionally test results for one vehicle have been provided by JRC and results for 3 cars have been submitted by JARI. The analyses on the separate vehicles are given below.

Table 14: Overview on the passenger cars where test data was provided by JRC and by JARI

		JRC 1	JARI A	JARI B	JARI C
Engine	-	Otto	1.3l Otto	0.66l Otto	2.0l Otto
Euro class	-	EU5	EU5	EU5	EU5
Transmission		AT	CVT	CVT	manual
Max. power	[kW]	187	n.a.	n.a.	n.a.
Kerb mass (DIN)	[kg]	1710	1236	062	1250

Since in chassis dyno tests it is not possible to vary just one single parameter within the small WLTP tolerances, the entire set of corrections need to be applied to validate the effects. Otherwise it may be that a positive effect of one correction is hidden behind deviations of other parameters.

The following chapter shows the measured CO₂ emissions and the results for each single correction step, together with the deviation of the relevant parameters against the target values.

C.1 TUG vehicles

C.1.1 Test vehicle No TUG 1

Figure 27 shows the test results for vehicle No TUG 1 and the effect of the single corrections discussed in the previous chapters. A correction for intake air conditions was not applied due to the high uncertainties. Also the correction for fuel properties was not applied since all tests have been performed with the same test fuel. The correction of speed deviations was based on 1Hz data since this is was the standard recording frequency at the time of testing¹⁹. The correction for speed deviations and road load deviation was applied based on the Veline version suggested before, where wheel power values below P_{overrun} are set to P_{overrun} .

The generic SOC correction method described in the WLTP (which does not consider charging and discharging efficiencies of the battery) shifts the test results from the WLTC started with rather empty battery (test 8) towards the level of the tests started after normal preconditioning. The final result for test 8 remains higher than for the other tests, suggesting that the generic values in the correction function slightly underestimate the additional fuel consumption required for battery charging. To empty the battery before test 8, electric load was activated during soak. It has to be noted that this procedure is not in line with the WLTP preconditioning rules, but has been performed just to test the SOC correction functions for large imbalances in the SOC.

Applying the speed & distance correction reduces the standard deviation between the tests (see also Table 15). The road load correction was not applied for vehicle TUG 1 since the method was elaborated after the tests at this car and thus no coast down tests have been performed after the WLTC. Without these additional coast down tests the correction method cannot be applied. The soak temperature correction also reduces the deviation between tests. The measurements exceeding the tolerances for soak temperatures are corrected to the level measured for the valid tests.

¹⁹ The test data provided by JARI later in the project showed that a higher resolution in the speed recording can also correct short over- and undershooting against the target speed to some extent. This effect can be found by less trained drivers. The tests at TUG had been finalised at this stage already.

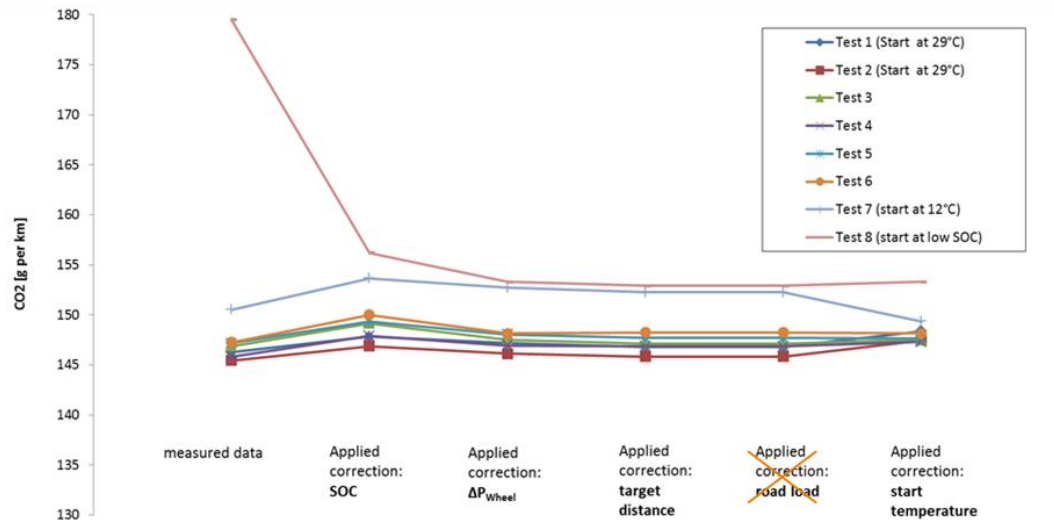


Figure 27: Test results and effects of the correction in the WLTC for diesel vehicle No. 1 (test 1, 2, 7 and 8 were out of WLTP flexibilities to test capability of the correction functions)

The effects of the single correction steps are summarised in Table 15.

Table 15: Test results and effects of the correction in the WLTC for vehicle No. 1

Test	Comment	Start-temp. [°C]	Measured data CO2 [g/km]	SOC correction		Speed&distance correction		Road load correction		Soak temp. correction		Final CO2 [g/km]
				Δ CO2 [g/km]	CO2 [g/km]	Δ CO2 [g/km]	CO2 [g/km]	Δ CO2 [g/km]	CO2 [g/km]	Δ CO2 [g/km]	CO2 [g/km]	
Test 1	Start at 29°C	29.0	146.3	1.5	147.8	-1.0	146.8	n.a.	146.8	1.6	148.4	148.4
Test 2	Start at 29°C	29.2	145.4	1.4	146.9	-1.0	145.8	n.a.	145.8	1.6	147.4	147.4
Test 3	Within WLTP flexibilities	24.3	146.9	2.3	149.2	-2.0	147.1	n.a.	147.1	0.4	147.5	147.5
Test 4	Within WLTP flexibilities	24.7	145.8	2.1	147.9	-1.0	146.9	n.a.	146.9	0.5	147.3	147.3
Test 5	Within WLTP flexibilities	23.0	147.2	2.1	149.3	-1.6	147.7	n.a.	147.7	0.0	147.7	147.7
Test 6	Within WLTP flexibilities	22.7	147.3	2.7	150.0	-1.8	148.2	n.a.	148.2	-0.1	148.2	148.2
Test 7	start at 12°C	12.3	150.5	3.1	153.7	-1.4	152.3	n.a.	152.3	-2.9	149.3	149.3
Test 8	Start at low SOC	24.4	179.5	-23.3	156.2	-3.3	152.9	n.a.	152.9	0.4	153.3	153.3
Standard deviation [g/km]			10.82		3.00				2.48		1.87	1.87
Std.dev. from tests 3,4,5,6 only			0.59		0.77		0.53		0.53		0.32	0.32

C.1.2 Test vehicle No TUG 2

Figure 28 shows the test results for vehicle No TUG 2 and the effect of the single corrections discussed in the previous chapters. A correction for intake air conditions was not applied due to the high uncertainties. Also, the correction for fuel properties was not applied since all tests have been performed with the same test fuel. The correction of speed deviations was based on 1Hz data since this is was the standard recording frequency at the time of testing. The correction for speed deviations and road load deviation was applied based on the Veline version suggested before, where wheel power values below P_{overrun} are set to P_{overrun} .

The generic SOC correction method described in the WLTP (which does not consider charging and discharging efficiencies of the battery) shifts the test results from the two WLTC started with rather empty battery to the level of the tests started after normal preconditioning. To empty the battery before the tests 3 and 5, electric load was activated during soak. It has to be noted that the tests 3 and 5 are not in line with the WLTP preconditioning rules but have been performed just to test the SOC correction functions for large imbalances in the SOC.

Applying the speed & distance correction further reduces the standard deviation between the tests (see also Table 16). The road load correction and the soak temperature correction do not further reduce the deviation between tests. Since for vehicle No TUG 2 the oil temperature was not measured, the test cell temperature before vehicle start was used as the input for the soak temperature correction. It is likely that this temperature is not sufficiently accurate to correct cold start effects within the small tolerances. The calibration procedure for road load settings at the TUG chassis dynamometer is quite repeatable, thus the standard deviation is not affected, but the absolute value is shifted by +1.6 g/km on average. It cannot be identified if the coast down tests after the WLTC or if the coast down tests during test bed calibration are more representative for the conditions during the WLTP test. The background and the underlying coast down tests are discussed in chapter 2.7.2 of the main report.

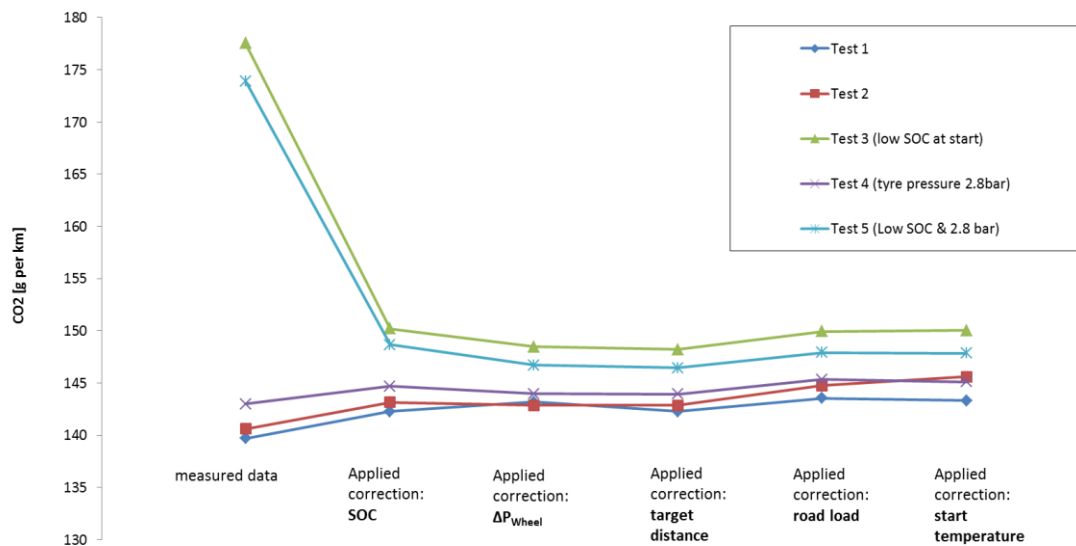


Figure 28: Test results and effects of the correction in the WLTC for diesel vehicle No. 2 (test 3 and 5 were out of WLTP flexibilities, since started with empty battery to test SOC correction effects)

The effects of the single correction steps are summarised in Table 16.

Table 16: Test results and effects of the correction in the WLTC for vehicle No. 2

Test	Comment	Start-temp.	Measured data	SOC correction		Speed&distance correction		Road load correction		Soak temp. correction		Final CO2
			CO2	Δ CO2	CO2	Δ CO2	CO2	Δ CO2	CO2	Δ CO2	CO2	
		[°C]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]
Test 1	Within WLTP flexibilities	22.1	139.7	2.6	142.3	0.0	142.3	1.3	143.6	-0.2	143.3	143.3
Test 2	Within WLTP flexibilities	26.2	140.6	2.5	143.2	-0.3	142.9	1.9	144.8	0.8	145.6	145.6
Test 3	Low SOC at test start	23.4	177.6	-27.3	150.2	-2.0	148.2	1.7	149.9	0.1	150.0	150.0
Test 4	Tyre pressure 2.8 bar	22.0	143.0	1.7	144.7	-0.7	143.9	1.4	145.4	-0.3	145.1	145.1
Test 5	Low SOC & 2.8 bar	22.8	173.9	-25.2	148.7	-2.2	146.5	1.5	147.9	-0.1	147.9	147.9
	Standard deviation [g/km]		17.0		3.1		2.2		2.3		2.3	2.3
	Std.dev. from tests 1,2,4 only		1.4		1.0		0.7		0.7		1.0	1.0

C.1.3 Test vehicle No TUG 3

Figure 29 shows the test results for vehicle No TUG 3 and the effect of the single corrections discussed in the previous chapters applied for the NEDC test results²⁰. A correction for intake air conditions was not applied due to the high uncertainties. Also, the correction for fuel properties was not applied since all tests have been performed with the same test fuel. The correction of speed deviations was again based on 1Hz data since this is was the standard recording frequency at the time of testing. The correction for speed deviations and road load deviation was applied based on the Veline version suggested before, where wheel power values below P_{overrun} are set to P_{overrun} .

The generic SOC correction method described in the WLTP (which does not consider charging and discharging efficiencies of the battery) increases the test results from all NEDC which have been started with rather full battery. No tests with empty battery have been performed at vehicle No TUG 3.

Applying the speed & distance correction further reduces the standard deviation between the tests (see also Table 17). The road load correction also slightly reduces the standard deviation between the 4 NEDC tests while the soak temperature correction also for vehicle No TUG 3 does not reduce the deviation between tests. Also for vehicle No. TUG 3 the oil temperature was not measured but the test cell temperature before vehicle start was used as input for the soak temperature correction. The calibration procedure for road load settings at the TUG chassis dynamometer was quite repeatable in the NEDC tests, thus the standard deviation is not affected much, but the absolute value is shifted by -0.4 g/km on average. The background and the underlying coast down tests are discussed in chapter 2.7.2 of the main report.

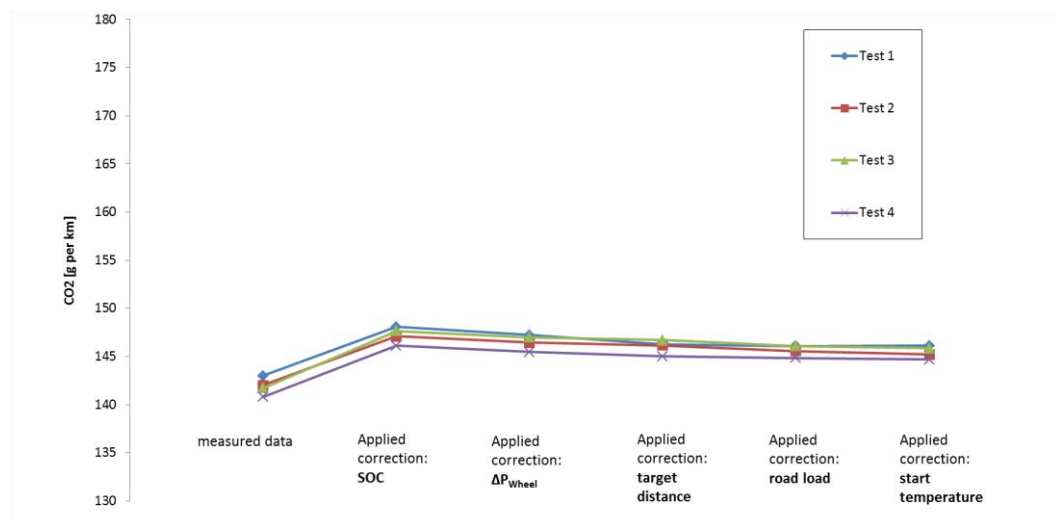


Figure 29: Test results and effects of the correction in the NEDC for vehicle No. 3

The effects of the single correction steps are summarised in Table 17.

²⁰ For test vehicle No TUG 3 only NEDC tests with broader variations in the test settings have been performed.

Table 17: Test results and effects of the correction in the NEDC for vehicle No. 3

Test	Comment	Start-temp.	Measured data	SOC correction		Speed&distance correction		Road load correction		Soak temp. correction		Final CO2
				CO2	Δ CO2	CO2	Δ CO2	Δ CO2	CO2	Δ CO2	CO2	
		[°C]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]
Test 1	Within NEDC flexibilities	25.1	143.0	5.1	148.1	-1.8	146.3	-0.2	146.1	0.0	146.1	146.1
Test 2	Within NEDC flexibilities	24.1	142.0	5.1	147.1	-1.0	146.1	-0.6	145.6	-0.3	145.2	145.2
Test 3	Within NEDC flexibilities	24.4	141.7	5.9	147.6	-0.9	146.7	-0.6	146.1	-0.2	145.9	145.9
Test 4	Within NEDC flexibilities	24.6	140.8	5.3	146.1	-1.1	145.0	-0.2	144.8	-0.2	144.7	144.7
	Standard deviation [g/km]		0.78		0.73		0.63		0.51		0.56	0.56

C.1.4 Test vehicle No TUG 4

Figure 30 shows the test results for vehicle No TUG 4 and the effect of the single corrections discussed in the previous chapters. A correction for intake air conditions was not applied due to the high uncertainties. Also, the correction for fuel properties was not applied since all tests have been performed with the same test fuel. The correction of speed deviations was based on 1Hz data since this is was the standard recording frequency at the time of testing. The correction for speed deviations and road load deviation was applied based on the Veline version suggested before, where wheel power values below P_{overrun} are set to P_{overrun} .

The generic SOC correction method described in the WLTP (charging and discharging efficiencies of the battery were not considered) shifts the test results from the two WLTC started with rather empty battery to the level of the tests started after normal preconditioning. To empty the battery before the tests 4 and 5, electric load was activated during soak. It has to be noted, that the tests 4 and 5 are not in line with the WLTP preconditioning rules but have been performed just to test the SOC correction functions for large imbalances in the SOC.

Applying the speed & distance correction further reduces the standard deviation between the tests (see also Table 18). The road load correction and the soak temperature correction do not further reduce the deviation between tests. Since for vehicle No TUG 4 the oil temperature was not measured, the test cell temperature before vehicle start was used as input for the soak temperature correction. It is likely that this temperature is not sufficiently accurate to correct cold start effects within the small tolerances. The calibration procedure for road load settings at the TUG chassis dynamometer was quite repeatable for vehicle TUG 4, thus the standard deviation is not affected, but the absolute value is shifted by +2.3 g/km on average. As described before, it is unknown today if the coast down tests after the WLTC, or if the coast down tests during test bed calibration, are more representative for the driving conditions in the WLTC test. The background and the underlying coast down tests are discussed in chapter 2.7.2 of the main report.

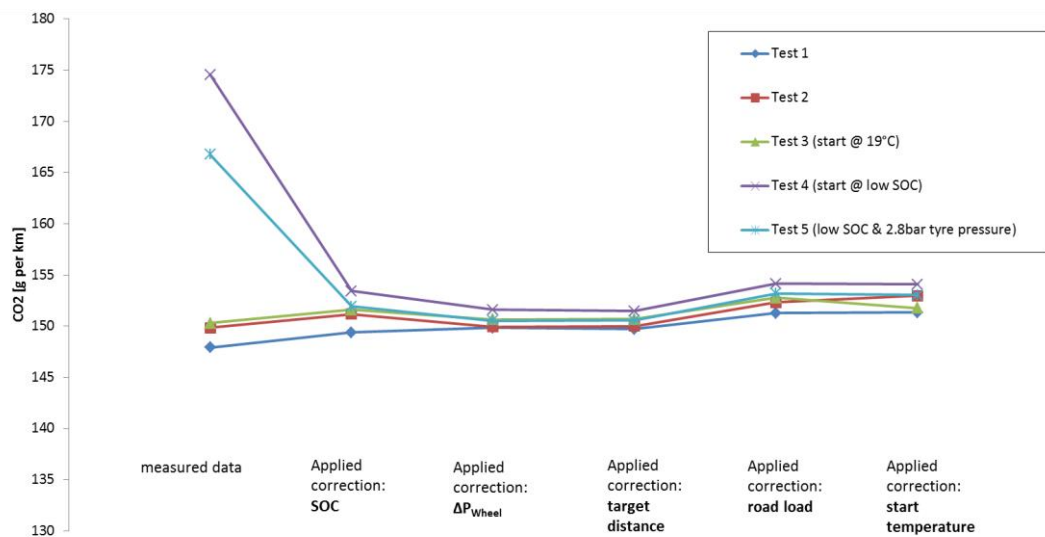


Figure 30: Test results and effects of the correction in the WLTC for diesel vehicle No. 4 (test 4 and 5 were out of WLTP flexibilities, since started with empty battery to test SOC correction effects)

The effects of the single correction steps are summarised in Table 18.

Table 18: Test results and effects of the correction in the WLTC for vehicle No. 4

Test	Comment	Start-temp.	Measured data	SOC correction		Speed&distance correction		Road load correction		Soak temp. correction		Final CO2
				CO2	Δ CO2	CO2	Δ CO2	CO2	Δ CO2	CO2	Δ CO2	
		[°C]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]
Test 1	Within WLTP flexibilities	23.2	147.9	1.5	149.4	0.3	149.7	1.6	151.3	0.1	151.4	151.4
Test 2	Within WLTP flexibilities	25.4	149.9	1.3	151.2	-1.2	150.0	2.3	152.3	0.7	153.0	153.0
Test 3	19° start temperature	19.3	150.3	1.3	151.6	-0.9	150.7	2.1	152.8	-1.0	151.8	151.8
Test 4	Low SOC at test start	22.8	174.6	-21.1	153.4	-2.0	151.5	2.7	154.1	-0.1	154.1	154.1
Test 5	Low SOC & 2.8 bar	22.4	166.8	-14.9	151.9	-1.4	150.5	2.7	153.2	-0.2	153.0	153.0
	Standard deviation [g/km]		10.8		1.3		0.6		0.9		1.0	1.0
	Std.dev. from tests 1,2,3 only		1.0		1.0		0.4		0.6		0.7	0.7

C.2 JRC vehicle

C.2.1 Test vehicle JRC 1

External test data was provided by JRC and by JARI after the first version of the report to further test the correction functions suggested before.

Figure 31 and Table 19 show the results for the vehicle tested at JRC. Since the vehicle was not tested for validation of the correction functions but for analysing the NEDC-WLTP correlation, no coast down tests after the WLTC have been performed and also no specific variations in test parameters were applied.

For the test vehicle the application of the correction for speed deviations and also for the soak temperature reduce the standard deviation between the single WLTC cold start tests significantly.

For the hot starts, the effects of the correction functions are smaller. We assume that variations in tyre temperatures in hot start tests caused deviations in the road load between the single hot tests which could explain the higher deviations between

hot tests compared to the cold tests. However, since no coast downs after the hot tests have been measured this assumption cannot be validated.

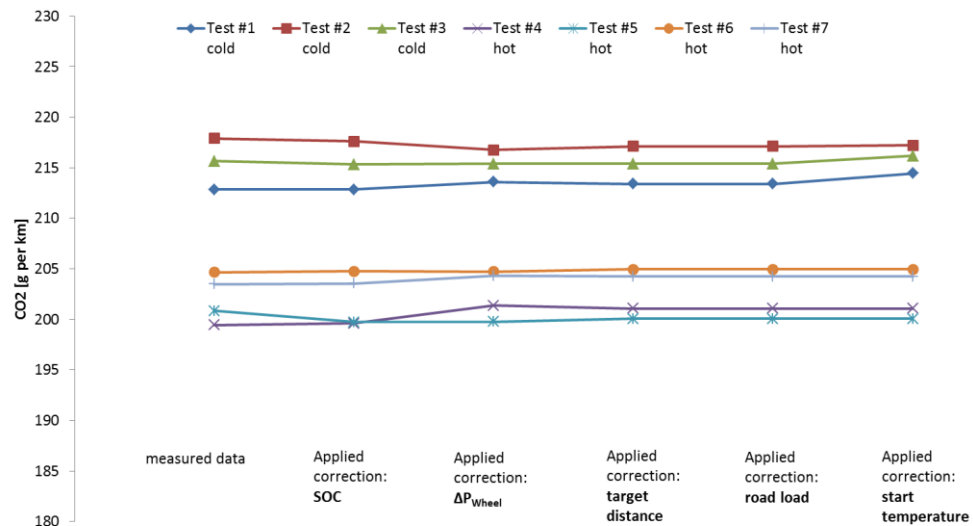


Figure 31: Test results and effects of the correction in the WLTC for diesel vehicle JRC 1 (4 tests are hot starts, 3 tests are cold starts))

The effects of the single correction steps are summarised in Table 19.

Table 19: Test results and effects of the correction in the WLTC for vehicle JRC 1

Test Nr.	Comments	Start Temp. [°C]	Measured data	SOC corr.		Speed&distance correction		Road load corr.		Soak temp. corr.		Final CO2
			CO2	ΔCO2	CO2	ΔCO2	CO2	ΔCO2	CO2	ΔCO2	CO2	
			[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	
1	within WLTP flexibilities	25.7	212.85	-0.02	212.83	0.56	213.39	n.a.	213.39	1.04	214.43	214.43
2	within WLTP flexibilities	23.3	217.90	-0.29	217.61	-0.50	217.11	n.a.	217.11	0.10	217.21	217.21
3	within WLTP flexibilities	25.0	215.66	-0.34	215.31	0.07	215.38	n.a.	215.38	0.78	216.16	216.16
Standard deviation [g/km]			2.53		2.39		1.86		1.86		1.40	1.40

C.3 JARI vehicles

C.3.1 Test vehicle JARI A

External test data was provided by JRC and by JARI after the first version of the report to further test the correction functions suggested before.

The tests at JARI included a WLTC with a very aggressive driving style which frequently accelerated and decelerated within the speed tolerances. This driving style was reported by JARI as being not at all typical for vehicle chassis dynamometer tests.

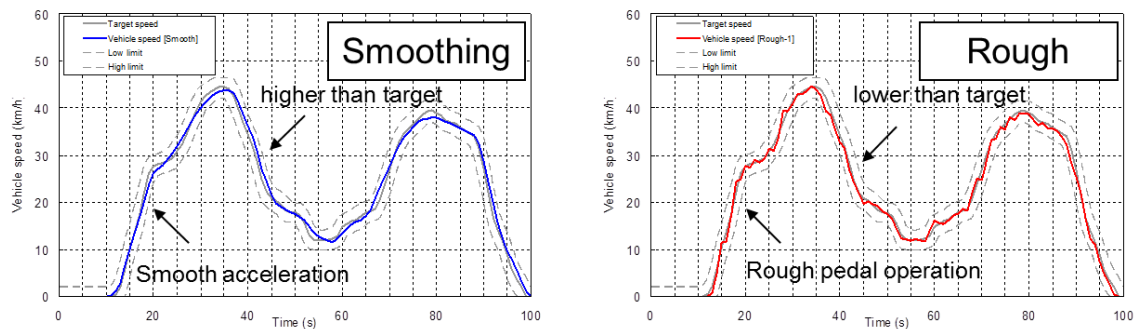


Figure 32: Example for smooth and rough (aggressive) driving style. Source: presentation from JARI on 10. March 2014

Figure 33 and Table 20 show the results for the single correction steps for vehicle JARI A. The SOC imbalance was low for this vehicle in all tests, thus the SOC correction has minor effects. The difference between the normal and the smooth driving style tests is reduced when the speed and distance correction is applied. The CO₂ value for the aggressive driving style is reduced only if 10Hz speed signals are used for the correction of speed deviations since the oscillations against the target speed due to the aggressive driver behaviour were higher than 1Hz. However, the effect of aggressive driving is by far not completely eliminated by the correction function. The high difference against the normal test result and the small cylinder capacity of the test vehicle suggest that the CVT gear box was operating often in kick-down mode during aggressive driving and thus had on average much higher engine speeds, which leads to a lower engine efficiency. This effect is certainly not corrected by the proposed correction methods which only adapt for differences in the wheel power²¹.

Influences of the driving style on the gear selection from automatic transmission systems in general can hardly be corrected in the type approval process.

For such effects additional criteria for valid tests, based on the driving indexes as defined in SAE J2951 and as presented by JARI on 10. March 2014 in a meeting arranged by the Commission, seem to be helpful to eliminate improper driver behaviour.

²¹ The correction works better for aggressive driving with test vehicle JARI C, which has a manual transmission.

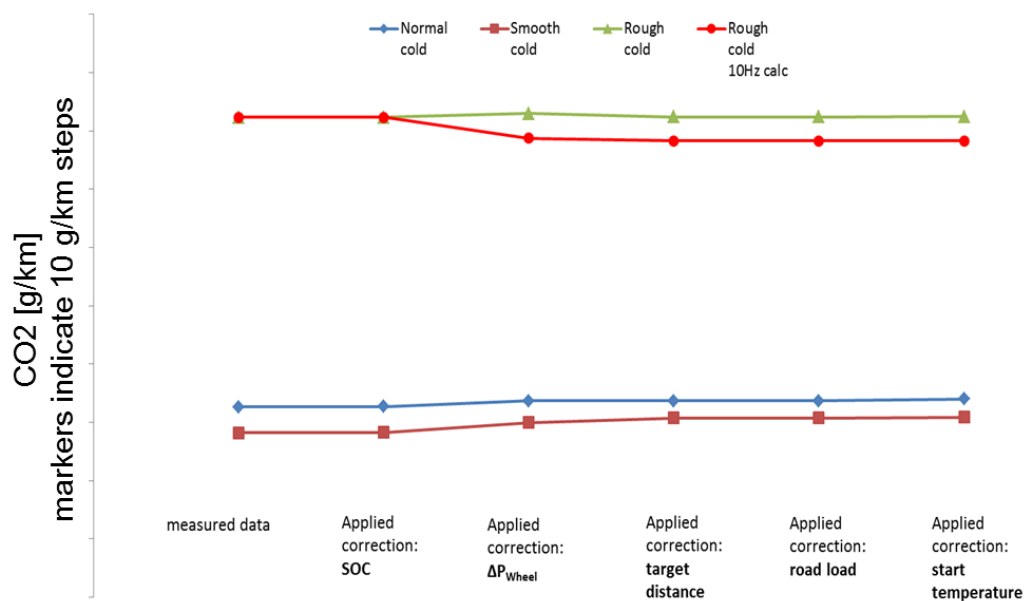


Figure 33: Test results and effects of the correction in the WLTC for diesel vehicle JARI A

The effects of the single correction steps are summarised in Table 20.

Table 20: Test results and effects of the correction in the WLTC for vehicle JARI A (absolute values for test results have to be masked for the vehicle)

Test Nr.	Comments	Start Temp. [°C]	Measured data CO2 [g/km]	SOC corr.		Speed & distance corr.		Road load corr.		Soak temp. corr.		Final CO2 [g/km]
				ΔCO2 [g/km]	CO2 [g/km]	ΔCO2 [g/km]	CO2 [g/km]	ΔCO2 [g/km]	CO2 [g/km]	ΔCO2 [g/km]	CO2 [g/km]	
				[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	
1	within WLTP flexibilities normal driving	24.2		0.06		0.99		n.a.		0.28		
2	within WLTP flexibilities smooth driving	23.8		0.07		2.45		n.a.		0.18		
3	within WLTP flexibilities aggressive driving	23.1		0.05		0.07		n.a.		0.04		
4	within WLTP flexibilities aggressive driving 10Hz data used for calculations	23.1		0.04		-4.08		n.a.		0.04		
	Standard deviation tests 1, 2, 4 [g/km]		30.04		30.02		26.63		29.03		26.53	26.53
	Standard deviation tests 1 and 2		3.16		3.15		2.12		28.73		2.18	2.18

C.3.2 Test vehicle JARI B

External test data was provided by JRC and by JARI after the first version of the report to further test the correction functions suggested before.

The effects for test vehicle JARI B are very similar to vehicle JARI A (Figure 34 and Table 21). The SOC imbalance was also low for this vehicle in all tests, thus the SOC correction has minor effects. The difference between the normal and the smooth driving style tests is also reduced when the speed and distance correction is applied. The CO₂ value for the aggressive driving style is reduced only if 10Hz speed signals are used for the correction of speed deviations since the oscillations against the target speed due to the aggressive driver behaviour were higher than

1Hz. Also, for test vehicle JARI B the effect of rough driving is by far not completely eliminated by the correction function. Again we assume that it was mainly the CVT that caused differences in the engine speed under rough driving conditions compared to normal driving. This effect is certainly not corrected by the proposed correction methods, which only adapt for differences in the wheel power.

The results for the two vehicles with CVT transmission and rather small engines suggest implementing additional criteria for valid tests based on the driving indexes as defined in SAE J2951 and as presented by JARI on 10. March 2014.

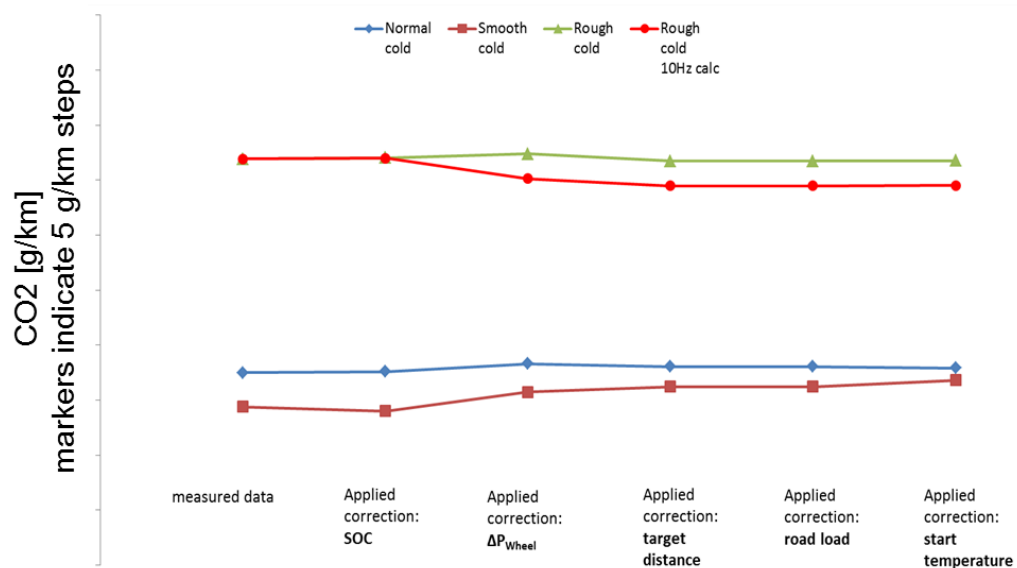


Figure 34: Test results and effects of the correction in the WLTC for diesel vehicle JARI B

The effects of the correction steps are summarised in Table 21.

Table 21: Test results and effects of the correction in the WLTC for vehicle JARI B (absolute values for test results have to be masked for the vehicle)

Test Nr.	Comments	Start Temp. [°C]	Measured data	SOC corr.		Speed & distance corr.		Road load corr.		Soak temp. corr.		Final CO2
			CO2 [g/km]	ΔCO2 [g/km]	CO2 [g/km]	ΔCO2 [g/km]	CO2 [g/km]	ΔCO2 [g/km]	CO2 [g/km]	ΔCO2 [g/km]	CO2 [g/km]	CO2 [g/km]
1	within WLTP flexibilities normal driving	22.5		0.10		0.44		n.a.		-0.11		
2	within WLTP flexibilities smooth driving	25.8		-0.39		2.19		n.a.		0.59		
3	within WLTP flexibilities aggressive driving	23.1		0.08		-0.28		n.a.		0.03		
4	within WLTP flexibilities aggressive driving 10Hz data used for calculations	23.1		0.07		-2.51		n.a.		0.03		
	Standard deviation tests 1,2,4 [g/km]		12.22		12.37		10.07		10.07		9.93	9.93
	Standard deviation tests 1 and 2		2.19		2.54		1.30		11.25		0.80	0.80

C.3.3 Test vehicle JARI C

In contrary to test vehicles JARI A and JARI B the vehicle JARI C has a manual transmission system. Figure 35 and Table 22 show the results for the correction functions for the vehicle C. The SOC imbalance was also low for this vehicle in all tests, thus the SOC correction has minor effects. For the vehicle C with manual transmission the difference between all driving styles is eliminated to a large extent when the speed and distance correction is applied on a 10Hz basis. This effect shows that differences in the wheel power are efficiently corrected by the proposed method and that the deviations remaining for vehicle A and B as shown before are most likely a result from the CVT behaviour.

A correction of speed deviations based on 1Hz signals has almost no effect since the oscillations against the target speed due to the aggressive driver behaviour were higher than 1Hz. This suggests demanding a minimum frequency for the recorded vehicle speed of approximately 5 Hz. Eliminating eventual noise in the signal needs to be discussed before an eventual implementation into the WLTP.

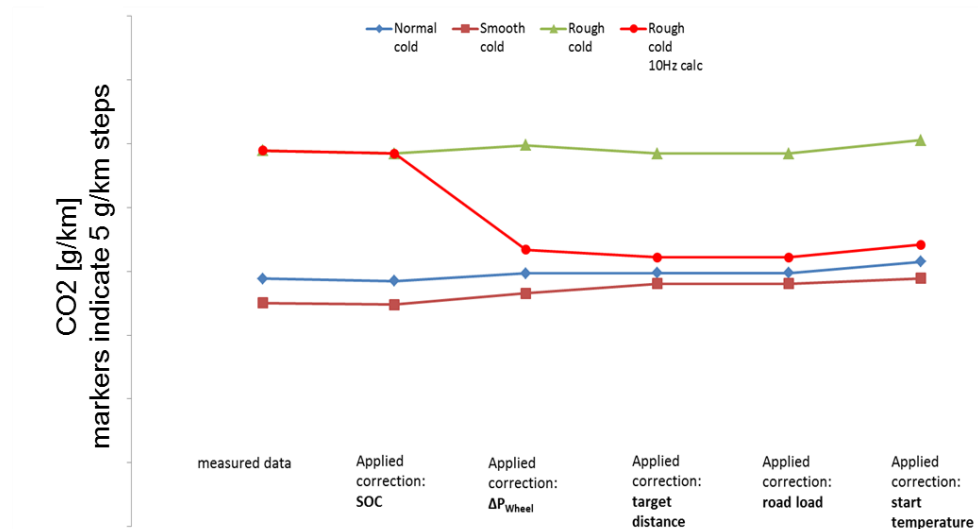


Figure 35: Test results and effects of the correction in the WLTC for diesel vehicle JARI C

The effects of the correction steps are summarised in Table 22.

Table 22: Test results and effects of the correction in the WLTC for vehicle JARI C (absolute values for test results have to be masked for the vehicle)

Test Nr.	Comments	Start Temp. [°C]	Measured data	SOC corr.		Speed & distance corr.		Road load corr.		Soak temp. corr.		Final CO2
			CO2	ΔCO2	CO2	ΔCO2	CO2	ΔCO2	CO2	ΔCO2	CO2	
			[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	[g/km]	
1	within WLTP flexibilities normal driving	25.8		-0.18		0.62		n.a.	179.87	0.89		
2	within WLTP flexibilities smooth driving	24.3		-0.15		1.64		n.a.	179.02	0.43		
3	within WLTP flexibilities aggressive driving	26.1		-0.23		0.00		n.a.	189.25	1.05		
4	within WLTP flexibilities aggressive driving 10Hz data used for calculations	26.1		-0.25		-8.13		n.a.	181.09	1.00		
	Standard deviation tests 1,2,4 [g/km]		6.42		6.37		1.04		5.67		1.32	1.32
	Standard deviation tests 1 and 2		1.34		1.33		0.60		5.41		0.93	0.93

D Coast down formulae

D.1 Coast down curve

Given the force balance:

$$M a = F_0 + F_1 \cdot v + F_2 \cdot v^2$$

The coast down can be calculated from integrating this differential equation:

$$t = \int -M/(F_0 + F_1 \cdot v + F_2 \cdot v^2) dv$$

which is:

$$t(v) = -2M \cdot \arctan[(2F_2 \cdot v + F_1)/D]/D$$

or, inversely:

$$v(t) = -1/2 \cdot (D \cdot \tan[D \cdot t/(2M)] + F_1)/F_2$$

where the determinant is $D = (4 \cdot F_0 \cdot F_2 - F_1^2)^{1/2}$. The coast down times follow from $t(v)$. For example, the coast down time between 85 and 75 km/h is: $T = t(v_{\text{end}} = 75) - t(v_{\text{start}} = 85)$. The coast-down distance is much more complex, as it is the integral over $v(t)$, between implicit boundaries v_{start} and v_{end} .

D.2 F1 = 0 approximation

The comparison of different road load parameters: F_0 , F_1 , and F_2 is less straightforward than expected, due to the correlation of the coefficients, and the mixed contributions, in particular to F_1 . An approximation where F_1 is set to zero gives a better comparison between the different F_0 s and the different F_2 s. This transformation can be carried out by considering the least-square approximation of the different road loads between $v=0$ and v_{max} :

$$F_{0_{\text{new}}} = F_{0_{\text{old}}} + 3 \cdot F_{1_{\text{old}}} \cdot v_{\text{max}}/16$$

$$F_{1_{\text{new}}} = 0.0$$

$$F_{2_{\text{new}}} = F_{2_{\text{old}}} + 15 \cdot F_{1_{\text{old}}}/(16 \cdot v_{\text{max}})$$

In this approximation it is possible to determine the coast down distances from integrating $v(t)$:

$$\text{distance}(v) = M \cdot \ln[1 + F_2 \cdot v^2 / F_0] / (7.2 \cdot F_2)$$

The distance is related to the force through the change in kinetic energy:

$$F = M(v_{\text{start}}^2 - v_{\text{end}}^2)/(25.92 \cdot \text{distance})$$

where M is the total vehicle inertia including the rotational inertia. This approximation is used in the example regarding road slope.

E Coast-down validation

In order to establish the correctness and accuracy of the existing and proposed corrections an extensive test program has been executed. One common vehicle has been tested on three different circuits, with two types of wheels (standard and sport) and three types of tyres for those wheels (premium and eco for the normal wheel, and a sport tyre for the sport wheel). The tests have all been executed according the protocol described in the WLTP 1a text (UN ECE, 2014). As well as different wheels, different weights and tyre pressures were also used. The tests are described in a separate Appendix F In this appendix to the main report only the main observations are repeated.

In total, 58 hours of test data were collected. The typical spread in coast down values, expressed at 1/T in consecutive “a” tests, and consecutive “b” tests was 2.8%. For a large part this can be attributed to the variation of the wind during the test. The total variation with the different conditions was much larger. The size of each effect is reported below. It must be noted however, that given a test by test variation of 2.8%, to be on the safe side a similar error margin can be applied to the results,. The successive tests will reduce the overall error of the tests, however, 2.8% must be considered “unexplained”, i.e., non-reproducible. Very likely, the wind gustiness plays an important role in this variation in the test results.

Hence the analysis consisted of three phases:

1. Multi-regression analysis on all the data per velocity range. From this analysis the appropriateness (functional form and magnitude) of the existing WLTP corrections were determined.
2. Multi-regression analysis on all the data with the functional form $a + b \cdot v + c \cdot v^2$. From this the magnitude of the effects was determined.
3. Multi-regression analysis on all the data, for the functional form, with the corrections for wind, temperature, air pressure, road gradient, vehicle weight, from the magnitude of the remaining effects were determined.

As much as possible all the data was included in the analysis. For example, the effect of tyre pressure is based on all the data, allowing for offsets for the alternative tyres (sport and eco):

$$F0 = F0_{\text{base}} + \Delta F0_{\text{pressure-dependence}} \cdot \Delta p + \Delta F0_{\text{sport}} + \Delta F0_{\text{eco}}$$

In this manner all the coast-down data is fitted in a multi-regression analysis combined with all other effects, like wind and temperature, with four tyre coefficients: the base value, the dependence on pressure, and offsets for the two alternative tyres.

The statistical noise is significant for the separate effects within the range of the WLTP test protocol. Physical arguments, underlying the effects on road load, should augment the measurement program in order to arrive at proper conclusions and correction algorithms.

E.1 WLTP corrections

The corrections described in the WLTP text have been validated. Overall the corrections are appropriate, as the same results were found within the bandwidth of the accuracy:

- Test mass correction in the WLTP is somewhat smaller than is seen in the test. The rolling resistance increased more than proportional with the vehicle weight with the increase in test mass. This is probably due to the low tyre pressure prescribed in the vehicle door label.
- The stationary wind correction is correct, it reduces the difference between the “a” and “b” test significantly, in cases of wind above 2.5 m/s.
- The temperature correction of the tyres (rubber viscoelasticity) was deemed correct by the measurement program, despite the complexity of heat transfer around the tyre.
- The need for an air pressure correction is confirmed by the test program. This air pressure correction is appropriate.
- The new approach to average the reciprocal of the coast-down time ensures the limited contribution of the road slope to the road load results.

The coast-down results were corrected with the WLTP correction methods, for weight, temperature, and air pressure. The other effects were studied with the corrected coast down results.

Initially, for each velocity, the analysis was performed separately. The appropriate velocity dependencies arose in this analysis: constant terms for rolling resistance; quadratic terms for air drag; and a combination of a constant and a linear term for wind. Some effects affect only the rolling resistance and yield the same additional force for all velocities, other effects are related to air drag, and they yield an additional force that increases with velocity.

In the second stage, the appropriate velocity dependency was inserted for each of the elements in the test matrix, and the effect was quantified. This yields the most significant magnitude of each of the variation.

E.2 Consistent effects as observed

In the data, apart from the effects already corrected for in the WLTP text, other effects can be recognized.

Road surface

The road surface has a significant contribution to the rolling resistance. The road surface has a significant contribution to the rolling resistance. Once all other corrections were applied to the reference coast down. There was a 20% deviation between the coast-down tests conducted at the different test tracks. Excluding other effects, it is likely a greater part of this difference can be attributed to the road surface.

E.2.1 Grill vanes

The tests were executed with open grill vanes. Only in one test were the grill vanes closed to study the effect of the air flow through the radiator. The effect on the air

drag of open grill vanes is 10%. Not all vehicle models have such grill vanes, and the setting can vary during driving. However it is unlikely that grill vanes will be closed during driving, due to the heat from the engine.. Hence, an open grill is an appropriate approximation to the worst case, and to the real world, settings, which may be partially closed in some cases.

E.2.2 Aerodynamic options

In one test sequence the vehicle was tested with the kerb-side mirror removed, the driver-side mirror folded, the antenna and windscreen wiper blades removed, and the wheel caps taped closed, to approximate a closed wheel. This combination of factors together yielded a reduction of the air drag of 4%.

E.2.3 Tyre pressure

The effect of tyre pressure turned out to be a complex problem. During the testing, tyre pressure was monitored and a large variation was found. Rather than relying on the initial tyre pressure only and the variations therein, the data from the tyre pressure monitoring was used. The standard tyres have a pressure of 2.1 bar. After conditioning the pressure was around 2.3 bar. In the case of higher initial pressures, the pressure after conditioning was also higher, albeit slightly less than in the case of the 2.1 bar. The variation of the rolling resistance with the monitor pressure was:

$$F_0 = 157 \text{ N} + 51 \text{ N/bar} \sim 75 * (2.1 + 0.7/\text{bar})$$

Using the conditioning pressure of 2.1 bar, the correction of the rolling resistance, based on this measurement program, would be:

$$F_{0\text{road-load}} = F_{0\text{test}} (p_{\text{test}}/p_{\text{set}})^{0.7}$$

Instead of the exponent of 0.7, exponents of 1 and 1.5 are often quoted in the older literature. Tyre manufacturers report nowadays an effect corresponding with exponents from 0.5 to 0.7. The result will depend on the tyre type, and the initial pressure.

E.2.4 Different tyres and wheels

The vehicle was also tested with sport tyres (18") which are wider than standard issue 16" tyres. Compared to the standard tyres the rolling resistance of the sports tyres was 5% lower, the air drag was 1.5% higher, the latter lying within the margin of error. The test was not corrected for the substantial high rotational inertia of these wheels and tyres. This has an effect of an 1% underestimation of the road load values.

The coast down tests were also conducted with eco-tyres which have a higher set pressure of 2.7 bar instead of 2.1 bar. For the same pressure, the rolling resistance of the eco-tyre would have been 9% higher, however, is the higher advised pressure resulted in 22% reduction in rolling resistance with the pressure, yielding a net reduction of 13% in rolling resistance for the eco-tyre.

E.2.5 Relative humidity

The effect of relative humidity yields a consistent effect over all the tests, despite the limited temperatures, between 10° C and 25° C. The higher relative humidity yields lower air drag, in the order of the expected result of around one percent.

E.2.6 Alignment

Most tests on the vehicle were carried out with the nominal toe-in of the wheels of 0.2° . The wheels are not adjustable in the other directions, e.g. camber and caster. The vehicle was also tested with a toe-in of 0° . This gives a reduction of rolling resistance of 6% with respect to the nominal, or midpoint, value.

E.2.7 Road slope

From the GPS data the road slope could be determined. This yields a correction on the coast-down time. In the WLTP the solution is the use of the average of both directions. However, it is possible to correct for each direction separately. In this case the vehicle weight can be recovered, as the additional force is the result of gravity, vehicle mass, and slope. In this manner only part of the vehicle mass is recovered.

E.2.8 Curved trajectories

The accuracy of the GPS allowed for the study of a curved trajectory rather than a straight one. Given the substantial effect of alignment of the wheels, the curved track can affect the rolling resistance positively. Indeed, given typical deviations of 0.5-1.0 metres from the original endpoint over 100 metres, the larger deviations give a slightly smaller rolling resistance. There is insufficient data to see a different effect in the case of 0° alignment.

E.2.9 Wind

The test track in The Netherlands was a few kilometers from the North-Sea coast, with substantial wind. The meteorological station at the height of 10 meters has an average wind velocities (measured over the last 10 minutes of the hour and over the whole hour in the period 2001-2010) of 4.6 m/s, with standard deviations over an hour and over ten minutes of 2.7 m/s and 2.8 m/s respectively. The same data also recorded the maximal wind speed (i.e., gusts) during an hour. The average gust speed is 7.8 m/s. Hence the wind gusts are typically 2.0 m/s higher than the hourly and ten-minute averages. This is the case for all average velocities, except the lowest velocities, smaller than 1.0 m/s.

Hence it can be concluded that wind gusts occur at small time scales of seconds, as there is hardly a distinction between hourly and ten-minute averages. Furthermore, at this location wind gusts are substantially higher than the average wind speed.

Comparing the meteorological station with the anemometer (direction and speed) at the track side, at a height of 0.7 metres above the terrain, the hourly wind measurement at 10 metres height are 1.5-2.0 m/s higher. In particular, at low wind speeds the difference is in the top of the range, while at higher wind speeds the difference is at the bottom of this range. Likewise, the wind gusts at 0.7 metres are still substantially higher than the average wind speeds, with more than 1.0 m/s difference.

Hence the wind gusts at track level of 1.0 m/s can explain very well the variations in the coast down results, from test to test. The test-to-test variation is 2.8%. With a wind speed difference of 1.0 m/s, i.e., 3.6 km/hr, the 5% variation in the apparent velocity at 72 km/h matches well with 3% variation in coast-down times.

F Coast-down test program

The road load of a vehicle is determined by means of a coast down test. As a large number of parameters and external conditions influence the coast down test, the type approval procedures for performing the coast down test allow for certain margins within which certain test parameters should lie. These margins can partly explain the difference between the real-world and type approval CO₂ emissions.

The main objective of the overall project (WLTP correction algorithms) is to develop correction factors for various variables in the coast down and chassis dynamometer test. In order to develop correction factors for the coast down test, TNO investigated the effect of variations in test parameters during the execution of a coast down test on the vehicle's road load by performing a series of coast down measurements. This appendix describes how the measurements were performed, chassis dynamometer results are not described in this report.

Variations on the following factors were identified and investigated:

1. Rolling resistance and inertia: tyre pressure, fitted tyres, wheel alignment, wheel size, test mass;
2. Air resistance: grill vane settings, type of rims, removal of certain accessories such as antennas, passenger side mirrors, etc;
3. Ambient conditions: temperature, wind speed, wind direction, atmospheric pressure, relative humidity;
4. Road properties: road surface, road gradient.

In order to ensure representative test results, TNO selected a vehicle for the measurements that was within the 2012-2013 top-five of EU sales lists. The vehicle was equipped with a manual gearbox and was in its original condition.

TNO performed a total of 25 coast down tests, resulting in over 600 runs and 58 hours of data. The tests were performed on three different test tracks in Spain, Belgium and the Netherlands. TNO used the same equipment for each test to obtain reliable and comparable data. Furthermore the same weather station, tyre pressure gauge, temperature gauge and weighing scales were used on each test track.

To ensure accurate measurements TNO established a fixed procedure for vehicle preparation, vehicle warm-up, execution of the test and post-test checks.

Key issues for this procedure are:

- Following the procedure in accordance with the Draft WLTP GTR, Annex 4;
- Checking tyre pressure and tyre temperature before, during and after the test;
- Weighing of the vehicle before and after the test;
- Performing a minimum of 12 test runs in both directions per test;
- Making sure the starting position on test track was similar for each test

F.1 Background

Real-world CO₂ emissions of passenger cars very often deviate from the type approval value. The type approval value for CO₂ emissions of passenger cars is based on a chassis dynamometer test in a laboratory. The total vehicle resistance of a vehicle, or 'road load', is simulated on the chassis dynamometer to obtain representative emissions.

The road load of a vehicle is determined by means of a coast down test. A coast down test is performed on an outside test track by coasting the vehicle down from 125 km/h to 15 km/h with the gearbox in neutral position. To improve the accuracy of the test, the test is performed multiple times in both directions. Speed and time are measured very accurately during the coast down test. Because the weight of the vehicle is known, the resistance curve of the vehicle can be determined.

As a large number of parameters and external conditions influence the coast down test, the type approval procedures for performing the coast down test allow for certain margins within which certain test parameters should lie. These margins can partly explain the difference between the real-world and type approval CO₂ emissions.

F.2 Aim and approach

The main objective of the overall project (WLTP correction algorithms) is to develop correction factors, for important flexibilities found, for various variables in the coast down and chassis dynamometer test. In order to develop correction factors for the coast down test, TNO investigated the effect of variations in test parameters during the execution of a coast down test on the vehicle's road load by performing a series of coast down measurements. This appendix describes how the measurements were performed. Chassis dynamometer results are not described in this report.

Variations on the following subjects were identified and investigated:

- Rolling resistance and inertia
 1. Tyre pressure, fitted tyres, wheel alignment, wheel size, test mass;
- Air resistance
 1. Grill vane settings, type of rims, removal of certain accessories such as antennas, passenger side mirrors, etc;
- Ambient conditions
 1. Temperature, wind speed, wind direction, atmospheric pressure, relative humidity;
- Road properties, road surface, road gradient.

F.3 Structure of this appendix

After the summary and introduction the test method is described in F.2. The test method gives more info about the used vehicle, tracks, equipment and the test procedure. F.4 describes the performed measurements programme and gives more information with regard to the tests undertaken.

F.4 Test vehicle

In order to ensure representative test results, TNO selected a vehicle for the measurements that was within the 2012-2013 top-five of EU sales lists. The vehicle was equipped with a manual gearbox and was in its original condition. Before testing, the vehicle was checked at an official dealer to ensure that the vehicle was in conformity with the manufacturer's specifications. Also the wheel alignment was set in the exact middle of the given tolerances and new tyres were fitted and were run-in for more than 200 km.

Table 23 show the vehicle specifications. With these specifications the vehicle is suitable for coast down testing according to the Draft WLTP GTR, Annex 4.

Table 23: Test vehicle specifications

Vehicle model	Ford
Type	Focus, hatchback, 5 doors
Odometer start [km]	27.402
Fuel	Gasoline
Construction year	2011
Unladen mass [kg]	1.276
Laden mass [kg]	1.825
Maximum power [kW]	92
Engine capacity [cm ³]	1.596
Gearbox	Manual

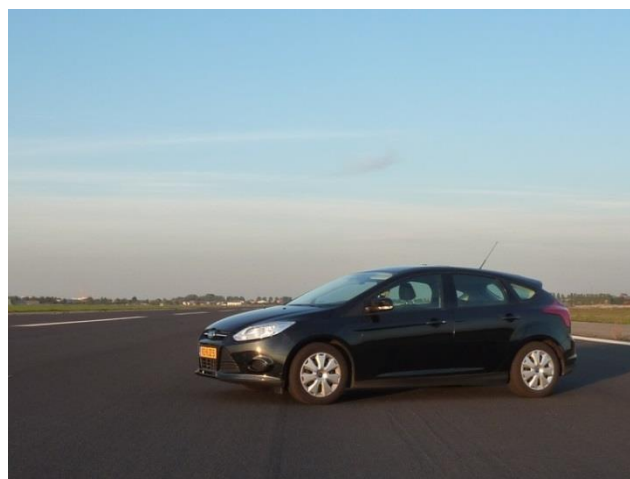


Figure 36: Test vehicle, Ford Focus

F.5 Test tracks

TNO performed a total of 25 coast down tests, the tests were performed on three different test tracks in the Netherlands (15 tests), Spain (8 tests) and Belgium (2 tests).

F.5.1 Air base Valkenburg (Netherlands)

Fifteen coast down tests were performed in the Netherlands. The selected test track was an airstrip of a closed military air base “Valkenburg” in Katwijk. The airstrip has a length of $\pm 2,200$ metres with asphalt that has a relatively coarse structure but which was in good and evenly shape, see Figure 37. At the end, the beginning and turns of the airstrip the road surface consists of concrete. This concrete road surface was only used as run-up and turning, not for the measurements. The slope of the test track is almost zero.

Katwijk is located close to the sea and the test track is open to the wind and does not have any shelter provided by trees or other obstacles, therefore the wind speed is more constant, but also on average higher than inland. White lines are located in the middle of the test track, which are used as aid for driving straight.

A local weather station of the meteorological institute (KNMI) is located about 100 metres next to the test track. The information from this weather station is used as a back-up.

Measurements on this test track were performed to determine the effect of vehicle adjustments, atmospheric conditions and road properties. At this track TNO had exclusive usage for each measurement. Tests were performed during the morning and afternoon.



Figure 37: The air-strip and asphalt structure at air base Valkenburg

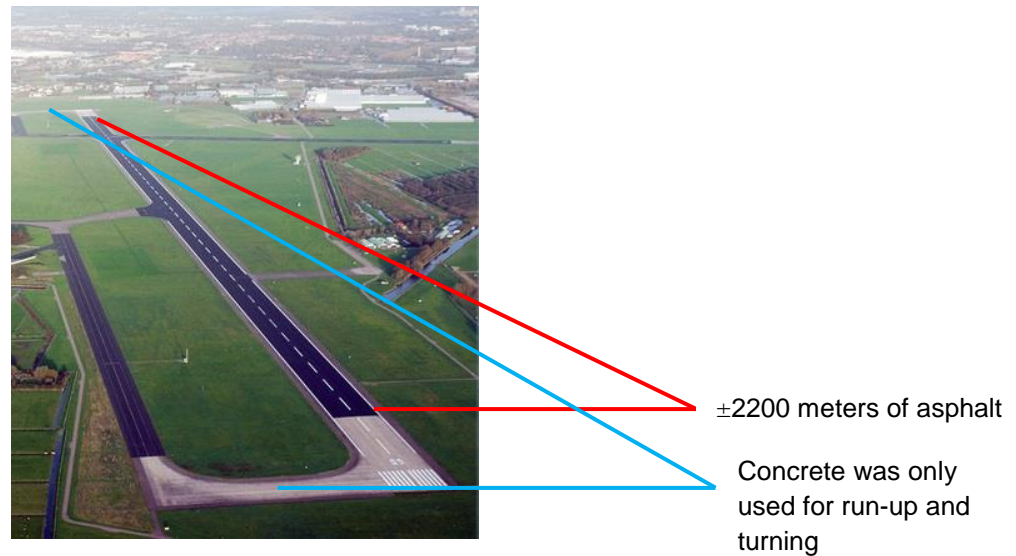


Figure 38: The air-strip from above, source: www.airwork.nl. The weather station is visible in the field right from the track.

F.5.2 *IDIADA proving ground (Spain)*

Eight coast down tests were performed in Spain at the high speed circuit of IDIADA proving ground. The high speed circuit is an oval circuit with a total length of $\pm 7,500$ metres and has four lanes with even and relatively dense asphalt, see Figure 39 and Figure 40. Each lane has different maximum and minimum speeds. For the measurements only the straights of the lanes were used. These straights have a length of $\pm 2,200$ metres and a longitudinal gradient of 0.3%, this gradient being in one direction positive and in the opposite direction negative. The bends were only used for run-up.

The greater part of the high speed circuit is relatively well sheltered by a hill and/or trees. Wind speeds can be very low at this circuit.

During the measurements lane 2 was used for the speeds higher than 100 km/h and lane 1 was used for the speeds lower than 100 km/h. After the lane changing the vehicle was accelerated again to 10 km/h above the starting speed.

A weather station is located next to the test track. The information from this weather station is used as a back-up.

Measurements on this test circuit were performed to determine the effect of atmospheric conditions and road properties. No vehicle adjustments were conducted during these measurements. There was no exclusive usage of the test track requested for the measurements. Tests were performed during the morning, afternoon, evening and night. During the evening, night and early in the morning very few other cars were present on the test track.



Figure 39: The high-speed circuit and associated asphalt structure



Figure 40: IDIADA proving ground from above, source: Google Maps

F.5.3 *Ford Lommel proving ground (Belgium)*

Two coast down tests were performed in Belgium at the “Straight Away” of Ford Lommel proving ground. The Straight Away’ is a straight track with an usable length of $\pm 2,300$ metres and has two lanes, one lane for each direction, see Figure 41. Regular asphalt with a common structure is used for the road surface. Before the beginning of the track some space is available for run-up, measurements were only performed on the test track.

The greater part of the Straight Away is relatively well sheltered by trees, in addition Lommel lies far from the sea, therefore wind speeds are often relatively low at this circuit.

A weather station is located next to the test track. The information from this weather station is used as a back-up.

Measurements on this test circuit were performed mainly to determine the effect of road properties. No vehicle adjustments were conducted during these measurements. No exclusive usage of the test track was requested for the measurements. However, tests could be performed well. Tests were performed during the morning and afternoon.



The Straight Away: ±2300 meters long

Figure 41: Ford Lommel Proving Ground, source: Google Maps

F.6 Test equipment

TNO tested at different test tracks but used the same equipment for each test to obtain reliable and comparable data.

F.6.1 GPS equipment

For measurement of the time and speed traces during the test a 100Hz GPS data logger was used, combined with an Inertial Measurement Unit (IMU) to improve the quality of parameters measured.

The GPS equipment used is a well-known test instrument for coast down testing with specifications as shown in Table 24. The equipment fulfils the accuracy standards prescribed in the current type approval test procedures (UNECE R83, Annex 4a - Appendix 7).

Table 24: VBOX 3i v2 GPS specifications

GPS equipment	
Model	Racelogic VBOX 3i v2, with IMU
Velocity accuracy	0.1 km/h
Time accuracy	0.01 s
Distance accuracy	0.05 %
Velocity resolution	0.01 km/h
Time resolution	0.01 s
Distance resolution	1 cm
Update rate	100 Hz
Latency	6.75 ms



Figure 42: The VBOX 3i v2 datalogger on the left and the IMU on the right

F.6.2 Monitoring equipment

Besides the GPS equipment the same weather monitoring system, tyre inflator, handheld thermometer and weighing scales were also used at the different test tracks for monitoring purposes. Specifications of the monitoring equipment are shown in Table 25. With these specifications the equipment fulfils the accuracy standards in the WLTP consolidated draft GTR of August 2, 2013. In Appendix 7 of the UNECE R.83 these accuracy standards are not prescribed.

Table 25: Specifications of test equipment

Weather monitoring system	
Model	Davis Vantage Vue, with datalogger
Logging interval	1 minute
Height of the weather station	0.7 meter above the road surface
Wind speed accuracy	5% accuracy
Wind direction accuracy	3° accuracy
Atmospheric temperature accuracy	0.5°C accuracy
Atmospheric pressure accuracy	1.0 mb accuracy
Tyre inflator	
Model	Förch PCL, hand calibrated
Reading accuracy	1 kPa
Weighing scale	
Model	Intercomp SW500 cabled scales system
Accuracy	0.1%
# scales	4

Handheld thermometer	
Model	Voltcraft DT-300, with probe
Range	-50 to +300 °C
Accuracy	+/- 2°C
Measuring frequency	1 s



Figure 43: Davis weather monitoring system

F.7 Test procedure

To ensure accurate measurements TNO established a fixed procedure for vehicle preparation, vehicle warm-up, execution of the test and post-test checks. Key items for this procedure are:

- Following the procedure in accordance with the Draft WLTP GTR, Annex 4;
Part of the procedure is the warming-up of the vehicle prior to the test. The influence of the warming-up procedure especially has an influence on the tyre pressure.
- Checking tyre pressure and tyre temperature before, during and after the test;
 - By checking the tyre pressure, some air escapes from the tyre due to removal of the tyre pressure gauge. The influence on the tyre pressure due to the tyre pressure measurement was investigated by 40 tyre pressure measurements in a row, starting at 240 kPa. After 40 measurements the tyre pressure was reduced by 25 kPa, i.e. around 0.625 kPa per measurement. When measuring before and during the coast down test this results in a reduced tyre pressure of approximately 1.25 kPa, around 0.6% of the set tyre pressure.
 - After the warming-up, the tyre pressure increases typically by ± 8 -10%. When the warming up is performed with very high speeds and accelerations, tyre pressure can be increased with ± 15 %. However, these high speeds are not considered in line with the WLTP.

- To ensure a correct registration of the tyre pressure it is important that the tyre pressure is measured shortly after the coast down test, otherwise the tyres are cooled down.
- Weighing the vehicle before and after the test;
- Performing a minimum of 12 tests in both directions per test; and
- Making sure the starting position on test track was similar for each test.

Table 26 shows a detailed description of the test procedure.

Table 26: Test procedure

	Notes	Checks	Actions
Preparation	<ul style="list-style-type: none"> - Date, time and mileage - Tyre pressure and tyre temperature - Vehicle weight and height 	<ul style="list-style-type: none"> - Engine oil, coolant and windshield washer fluid - Grill vanes open - Windows, doors, bonnet closed - Lights, radio and air conditioning on - Interior temperature and blower at a fixed setting - Test track condition, should be dry and clean 	<ul style="list-style-type: none"> - Fueling and clean the car - If necessary add or reduce mass. - Measure vehicle height at 4 different points
Warming-up	Notes after warming up: <ul style="list-style-type: none"> - Tyre pressure and tyre temperature - Temperature road surface 	-	<ul style="list-style-type: none"> - Moderate braking from 80 to 20 km/h within 5 to 10 s - Driving at 117 km/h for 25 minutes
Test	<ul style="list-style-type: none"> - Anything unusual during the test was noted Notes after phase 1 of the test: <ul style="list-style-type: none"> - Tyre pressure and tyre temperature 	-	<ul style="list-style-type: none"> - Accelerate vehicle to ± 10 km/h starting speed, gearbox in neutral, engine run at idle, clutch engaged, steering wheel movement avoided as much as possible, no braking until the end of the measurement. - Tests in two opposing directions - Minimum of 12 tests and a statistical accuracy of $<1,6\%$ - Similar starting position on test track for each test - Test divided in two phases, phase 1: 125 to 65 km/h, phase 2: 65 to 15 km/h.
Post test	- Tyre pressure and	- Grill vanes open	

	tyre temperature - Temperature road surface and temperature of the brakes - Vehicle weight	- Windows, doors, bonnet closed	
--	--	---------------------------------	--

F.8 Coast-down measurement program

F.8.1 Test programme

TNO performed a total of 25 coast down tests, resulting in over 600 runs and 58 hours of data. Table 27 show the performed tests divided over the three test tracks. The table is not in chronological order, the column "Test ID" indicates the test sequence. During measurements were a vehicle setting was adjusted, only one type of adjustment was tested at the same time, other settings remained equal to the reference situation. The following paragraphs describe more details with regard to the test variations.

Table 27: Measurement programme

Measurement	Test track Valkenburg	Test track IDIADA	Test track Ford LPG	Total	Test ID
Reference situation (210 kPa tyre pressure)	4 tests	8 tests	2 tests	14 tests	1-11, 22-24
Tyre pressure at 250 and 290 kPa	2 tests	-	-	2 tests	12, 13
Eco tyres at 210 kPa and 290 kPa	2 tests	-	-	2 tests	20, 21
Optimal wheel alignment (0°)	1 test	-	-	1 test	25
18 inch sportive rims, with sport tyres	2 tests	-	-	2 tests	16, 17
Test mass high and extra low	2 tests	-	-	2 tests	14, 15
Grill vanes closed	1 test	-	-	1 test	18
Optimization on air resistance	1 test	-	-	1 test	19
Ambient conditions*	15 tests	8 tests	2 tests	25 tests	All
Road properties*	15 tests	8 tests	2 tests	25 tests	All
Total	15 tests	8 tests	2 tests	25 tests	-

* The effects of ambient conditions and road properties are obtained by using all test data.

F.9 Reference situation

With the vehicle in the reference situation (16" wheels, premium tyres, test mass high, and open grill, nominal wheel alignment (toe in)), tests were performed on three test tracks. At the 'Valkenburg' test track, reference measurements were performed at the beginning, the middle and at almost the end of the complete measurement programme.

As a reference situation the vehicle was confirmed the manufacturer's specifications at the local dealer garage. Possible variables of the vehicle settings are explained in more detail in the text below.

Tyre specifications and tyre pressure: New tyres were fitted with the following specifications: Continental PremiumContact 5, 205/55 R16, fuel economy label C.

Before the test programme was started, the tyres had been run-in for more than 200 kilometres. The tyres were not specially conditioned or treated. The vehicle manufacturer provided a tyre pressure range between 210 kPa and 290 kPa, for the reference situation, A tyre pressure of 210 kPa was maintained.

Wheel alignment: The wheel alignment of the vehicle was checked and adjusted before the start of the testing program. The toe-in and toe-out of the wheels can be adjusted for both the front and rear wheels. Other typical alignment items, such as camber and caster can't be adjusted for this vehicle but were within the tolerances of the manufacturer's specifications. The alignment tolerances and values after adjustments are shown in Table 28:

Table 28: Wheel alignment specifications

Definition	Tolerance	Nominal setting	Maximum deviation left or right	Setting test vehicle
Front wheels				
Total toe	0.0° to 0.4°	0.2° toe-in ± 0.2°		0.19° toe-in, evenly setting of both wheels
Camber	-1.82° to 0.68°	-0.57°	1.25°	Left: 0.02° Right: -0.41°
Caster	3.28° to 5.28°	4.28°	1.00°	Left: 4.36° Right: 4.15°
Rear wheels				
Total toe	0.18° to 0.58°	0.38° toe-in ± 0.2°		0.37° toe-in, evenly setting of both wheels
Camber	-2.66° to -0.16°	-1.41°	1.25°	Left: -1.42° Right: -2.04°

Test mass: The baseline tests and other non-mass related tests were performed with minimum permissible reference mass, 1443 kg. The calculation parameters and the determined minimum permissible reference mass are shown in Table 29.

To reach the desired test mass, load was added to the passenger seat of the vehicle.

Table 29: Test masses and associated parameters

Unladen Mass	1276 kg
Laden mass	1825 kg
Standard load (driver and luggage)	100 kg
Package of options	0 kg
Factor for variable mass	15%
Test mass low*	1443 kg

*Calculated according to the Draft WLTP GTR, Annex 4

Grill Vanes: One of the test vehicle's features are active grill vanes. Most likely the vanes close partly with a cold engine and the vanes close at high speeds to reduce the air-resistance.

To avoid untraceable behaviour of the active grill vanes, the grill vanes were forced and fixed in an open position during the tests. The open position was established at an official Ford workshop to avoid possible ECU errors.

F.10 Rolling resistance and inertia

F.10.1 Tyre pressure at 250 and 290 kPa

As mentioned earlier, the vehicle manufacturer provided a tyre pressure range between 210 kPa and 290 kPa. For the reference situation a tyre pressure of 210 kPa was set. To investigate the effect of a higher tyre pressure, tests were performed at 250 and 290 kPa. Including the reference tests at 210 kPa, three different tyre pressure settings were tested.

F.10.2 Eco tyres

An "eco" tyre is designed to reduce the rolling resistance. The reference tyres of the measurements were from Continental. To investigate the effect of an eco-tyre versus a regular tyre it is important that both tyre types have the same dimensions and are of the same brand. Also important is that the tyres are off the same production line, i.e., the production time should not differ a lot.

New tyres were fitted with the following specifications: Continental EcoContact 5, 205/55 R16, fuel economy label B. Before the tests started, the tyres were run-in for more than 200 kilometres. The tyres were not specially conditioned or treated.

Continental recommends a high tyre pressure for the eco tyres. Tests were performed with the tyre pressure at 210 kPa and at 290 kPa. With the test at 210 kPa the eco tyre can be compared with the reference situation, knowing that 210 kPa is not recommended for the eco tyre. With the test at 290 kPa the full potential of the Eco tyre was investigated, also the reference tyres were tested at 290 kPa,

hence a good comparison between both tyre types is possible. In addition the effect of a higher tyre pressure can be analysed again.

After the tests, the reference tyres were fitted again. To minimize the effect of the wheel exchange, the rims and wheel hubs were marked so that the wheels could be fitted on the same axle on the same position as before. Furthermore, the measurements with the eco tyres were planned as test 20 and 21 to minimize possible effects on the measurement programme.

F.11 Alternative wheel alignment

As mentioned before only the toe-in and toe-out of the wheels can be adjusted for both the front and rear wheels. To investigate whether a neutral toe is beneficial for the rolling resistance during a coast down test the front and rear toe was set to 0°, see Table 30.

It is difficult to position the alignment back to the exact reference position, hence the test with the zero toe-in setting is performed at the end of the measurement programme.

Table 30: Toe settings

Definition	Tolerance	Reference setting	Test setting
Front wheels: Total toe	0.0° to 0.4°	0.19° toe-in, evenly setting of both wheels	0.0° toe, evenly setting of both wheels
Rear wheels: Total toe	0.18° to 0.58°	0.37° toe-in, evenly setting of both wheels	0.0° toe, evenly setting of both wheels

F.11.1 18 inch sportive rims, with sport tyres

The investigation with regard to the 18 inch wheels has a dual purpose. TNO was interested in the increase in air-resistance due to a very open structure of a rim and the increase in width of the wheel. On the other hand an expected increase of inertia force was expected due to the higher weight of the rims.

Sportive rims of the brand “LM” were purchased in combination with 18 inch tyres. The rims are part of the Ford Focus model range for rims. The rims are made of alloy and have an open structure, see Figure 44. The reference rims are 16 inch and made of steel with a wheelcap mounted.

New tyres were fitted with the following specifications: Continental SportContact 5, 235/40 R18, fuel economy label C. Before the tests started, the tyres were run-in for more than 200 kilometres. The tyres were not specially conditioned or treated.

Table 31 show the weights of the 18 and 16 inch tyres and rims.

Two tests were performed with the 18 inch wheels, both with the reference test mass. Due to the higher weight of the rims, 17 kg of load was removed. One test was performed with the tyre pressure at 210 kPa for all wheels. The other test was

performed with a tyre pressure of 230 kPa for the front wheels and 210 kPa for the rear wheels. This is a possible variation for this wheel size for this vehicle model.



Figure 44: Left 18 inch rim, right 16 inch wheel

Table 31: Wheel masses

Type	Mass [kg]	Total 1 wheel [kg]	Total 4 wheels [kg]
16 inch rims	8.1	17.0	68.1
16 inch tyres	9.0		
18 inch rims	11.5	21.3	85.3
18 inch tyres	9.8		

Inertia measurements

For determination of the inertia and resistance of the wheels including connected rotating vehicle parts, extra measurements were performed. The measurements were performed by a coast down test for each wheel on a vehicle lift. The vehicle lift was set on the highest position for enough clearance between the wheels and floor. To bring the wheel up to speed a line with a weight coiled around the wheel was dropped, see Figure 45. The measurements were performed for both wheel sets, i.e. the 16 and 18 inch wheels. For each wheel of both wheel sets the measurement was repeated 10 times to improve the accuracy.

In order to distinguish between the inertia and resistance, two different weights were used, a 3 kg and a 6 kg weight. As an input for the calculation the wheel circumference was measured, wheel speed and coasting time was obtained from the CAN-bus of the vehicle. The wheel speed was calibrated with the same GPS data logger as used for the coast down measurements on the road.



Figure 45: Inertia test

F.12 Test mass high and extra low

To investigate the effect of a higher or lower test mass, two additional test masses were tested. The determination of the high test mass is based on the WLTP. The reference mass was already the low test mass according to the WLTP. In order to test with a lower test mass than the reference, all load was removed from the vehicle and the fuel tank was only partly filled. To reach the desired high test mass, load was added equally to the passenger side, luggage compartment and back seat of the vehicle.

The calculation parameters for the maximum test mass and the determined test masses are shown in Table 32:

Table 32: Test mass high and extra low including associated parameters

Unladen Mass	1276 kg
Laden mass	1825 kg
Standard load (driver and luggage)	100 kg
Package of options***	150 kg
Factor for variable mass	15%
Test mass low*	1443 kg
Test mass high*	1571 kg
Test mass extra low**	1380 kg

*Calculated according the Draft WLTP GTR, Annex 4

**Calculation not according the Draft WLTP GTR, Annex 4

***Estimation based on national sales database

F.13 Air resistance

F.13.1 Grill vanes closed

As mentioned before the active grill vanes were fixed in open position to avoid untraceable behaviour of the active grill vanes, see Figure 46. To investigate the effect of closed vanes, the vanes were forced into a closed position during one complete test.



Figure 46: Active grill vanes in open position

F.13.2 Optimization on air resistance

In order to optimize the air-resistance of the vehicle the following adjustments were made, also see Figure 47:

- 1 Removal of antenna
- 2 Removal of windscreen blades
- 3 Removal of the side mirror on passenger side
- 4 Folding the side mirror on the driver side
- 5 Taping of the wheel caps



Figure 47: Optimization for air-resistance

F.14 Ambient conditions and road properties

The effect of ambient conditions and road properties were investigated by using all available data from all 25 coast down tests. The following parameters were investigated:

- Ambient conditions:
 - temperature, wind speed, wind direction, atmospheric pressure, relative humidity.
- Road properties:
 - road surface, road gradient.

Ambient conditions were continuously monitored during all measurements with the weather monitoring equipment as described in F.6. In addition the local weather stations are used as back up.

Road gradients shall be obtained from the GPS data. The road surface is not measured.



Figure 48: Ambient conditions at the Valkenburg air-strip

G Suggested WLTP gtr amendments for deviation against target speed and road load calibration

Meaning of different fonts below:

- Text in standard black fonts is the text of the original WLTP Phase 1a gtr.
- Text in red fonts is new or amended text compared to WLTP Phase 1a gtr.
- Text and numbers marked blue are values open for further discussion.
- Text in italic and blue contains explanations and background information not to be used in the amendment of the WLTP but to explain the suggested amendments

G.1 Amendments describing the correction for deviations against the target speed

It is suggested to add a paragraph 7 and 8 to Annex 7 as described below.

Annex 7 Calculations

Text for paragraphs 1. to 6. does not need any amendments. In case changes will be made in paragraph 5, all equations are repeated in the new paragraphs 7 and 8.

7. Correction of CO₂ for deviations against the target speed

The target velocity is the velocity according to the applicable WLTC as defined in Annex 2.

The actual vehicle speed is the velocity measured at the chassis dynamometer and I shall be measured at a frequency of at least 5 Hz.

Option: For the correction of deviations against the target speed the velocity signal shall be filtered using the xxx filter method to eliminate noise in the signal. *We cannot assess if filtering is necessary and we cannot elaborate a proposal for a proper filter method since we do not have any data for the measured velocity in >5Hz with a realistic noise on the signal. The T4253H filter may be useful and could be tested with data from different chassis dynamometers to analyse if the filter eliminates possible noise in the signals without filtering real deviations.*

The acceleration shall be calculated as described in paragraph 5 of this Annex.

$$a_i = \frac{v_i - v_{i-1}}{3.6 \times (t_i - t_{i-1})} \quad (51)$$

$$a_{mi} = \frac{v_{mi} - v_{mi-1}}{3.6 \times (t_i - t_{i-1})} \quad (52)$$

where

a_i is the target acceleration during time period (i-1) to (i), m/s²;

a_{mi} is the measured acceleration during time period (i-1) to (i), m/s²;

v_i is the target velocity at time t_i , km/h;

v_{mi} is the measured velocity at time t_i , km/h;

t_i is time, s.

The power and the forces at the wheels according to target speed and according to measured velocity shall be calculated as follows.

$$F_i = f_0 + f_1 \times \left(\frac{v_i + v_{i-1}}{2} \right) + f_2 \times \frac{(v_i + v_{i-1})^2}{4} + (1.03 \times TM) \times a_i \quad (53)$$

$$P_i = F_i \times \left(\frac{v_i + v_{i-1}}{3.6 \times 2} \right) \quad (54)$$

$$F_{mi} = f_0 + f_1 \times \left(\frac{v_{mi} + v_{mi-1}}{2} \right) + f_2 \times \frac{(v_{mi} + v_{mi-1})^2}{4} + (1.03 \times TM) \times a_{mi} \quad (53)$$

$$P_{mi} = F_{mi} \times \left(\frac{v_{mi} + v_{mi-1}}{3.6 \times 2} \right) \quad (54)$$

Where

P_i is the target power during time period (i-1) to (i), W

P_{mi} is the power during time period (i-1) to (i), W

F_i is the target driving force during time period (i-1) to (i), N

F_{mi} is the driving force during time period (i-1) to (i), N

v_i is the target velocity at time t_i km/h;

v_{mi} is the measured velocity at time t_i km/h;

TM is the test mass, kg;

a_i is the target acceleration during time period (i-1) to (i), m/s²;

a_{mi} is the measured acceleration during time period (i-1) to (i), m/s²;

f_0, f_1, f_2 are the road load coefficients for the test vehicle under consideration (TM_L , TM_H or TM_{ind}) in N, N/km/h and in N/(km/h)² respectively.

All power values below $P_{overrun}$ are set to $P_{overrun}$ to exclude negative power values not relevant for the fuel flow:

$$P_{overrun} = -\frac{D}{k_v} \times 0.001 \quad (55)$$

Where

$P_{overrun}$ is the power calculated from the Veline equation according to chapter 8 with zero CO₂ emissions, W

D is the constant from the Veline equation in chapter 8, gCO₂/s

k_v is the slope of the Veline equation in chapter 8, gCO₂/kW

$$\text{If } P_i < P_{overrun} \text{ then } P_i = P_{overrun} \quad (56)$$

$$\text{If } P_{mi} < P_{overrun} \text{ then } P_{mi} = P_{overrun} \quad (57)$$

The average power for the target velocity and for the measured velocity is calculated for the power above $P_{overrun}$.

$$P = \sum_{t_{start}}^{t_{end}} \frac{P_i}{n} \quad (58)$$

$$P_m = \sum_{t_{start}}^{t_{end}} \frac{P_{mi}}{n} \quad (59)$$

Where

P Average power from the target velocity, W

P_m Average power from the measured velocity, W

n number of time steps in the WLTC recording

Then the difference in the positive cycle work values is calculated for the 1800 second test duration.

$$\Delta W_{wheel} = 1.8 \times (P - P_m) \quad (60)$$

Where

ΔW_{wheel} is the difference in the cycle work, kW; s

P Average power from the target velocity, W;

P_m Average power from the measured velocity, W.

The vehicle based Veline function is applied to correct for deviations against the average power from the WLTC target velocity.

$$\Delta CO_{2v} = \Delta W_{wheel} * k_v \quad (61)$$

Where

ΔW_{wheel} is the difference in the cycle work, kW; s

k_v is the slope of the Veline equation in chapter 7, g CO₂/kW; s

ΔCO_{2v} is the correction value for the measured CO₂ emissions, g.

The CO₂ value corrected for deviations in target speed and for corresponding deviations against target distance is then

$$M_{CO2corr} = \frac{M_{CO2} \times d + \Delta CO_{2v}}{23.27}$$

Where

$M_{CO2corr}$ is the mass emission of CO₂ corrected for deviations in the velocity and in the distance, g/km;

d is the distance driven over the corresponding WLTC, km;

M_{CO2} is the mass emission of CO₂ as calculated according to chapter 3.2, g/km;

ΔCO_{2v} is the correction value for the measured CO₂ emissions, g.

23.27 is the WLTC target test distance, km.

8. Calculation of the vehicle specific Veline

The vehicle specific Veline is a linear equation calculated from the WLTC test result for CO₂ defining the correlation between CO₂ emissions in [g/h] and the average power at the wheel [kW].

$$CO_2 = k_v \times \frac{P_m}{1000} + D \quad (62)$$

where

CO_2 is the CO_2 emission value over a test period in the WLTC with the average power at the wheel of P_m , g/s;

k_v is the slope of the Veline equation, g CO_2 /kWs;

D is the Constant of the Veline equation, g CO_2 /s

P_m Average power calculated from the measured velocity as defined in chapter 7 and repeated below, W.

$$F_{mi} = f_0 + f_1 \times \left(\frac{v_{mi} + v_{mi-1}}{2} \right) + f_2 \times \frac{(v_{mi} + v_{mi-1})^2}{4} + (1.03 \times TM) \times a_{mi} \quad (63)$$

$$P_{mi} = F_{mi} \times \left(\frac{v_{mi} + v_{mi-1}}{3.6 \times 2} \right) \quad (64)$$

Where

P_{mi} is the power during time period (i-1) to (i), W

F_{mi} is the driving force during time period (i-1) to (i), N

v_{mi} is the measured velocity at time t_i km/h;

TM is the test mass, kg;

a_{mi} is the measured acceleration during time period (i-1) to (i), m/s²;

f_0, f_1, f_2 are the road load coefficients for the test vehicle under consideration (TM_L , TM_H or TM_{ind}) in N, N/km/h and in N/(km/h)² respectively.

The power with zero CO_2 emissions in the Veline equation is not known when the Veline equation is calculated the first time and shall be set initially to 2% of the rated engine power. The exact value can be calculated iteratively.

$$P_{overrun-0} = -0.02 \times P_{rated} \quad (65)$$

P_{rated} is the rated power of the engine of the test vehicle, W.

All power values below $P_{overrun-0}$ are set to $P_{overrun-0}$ to exclude negative power values not relevant for the fuel flow:

$$\text{If } P_{mi} < P_{overrun} \text{ then } P_{mi} = P_{overrun} \quad (66)$$

$$P_m = \sum_{t_{start}}^{t_{end}} \frac{P_{mi}}{n} \quad (59)$$

Where

P_m Average power from the measured velocity, W;

n number of time steps in the WLTC recording.

The P_m values shall be computed for the single phases of the WLTC as well as for the entire WLTC as described in equation (59) for the corresponding start and end time.

The average measured CO_2 mass emissions [g/h] from each phase of the WLTC shall be correlated to the average P_m values of the corresponding phase for the single test phases and for the entire WLTC.

The resulting best-fit line is the Veline equation for the tested vehicle. The best-fit line shall be computed using the least square deviation method.

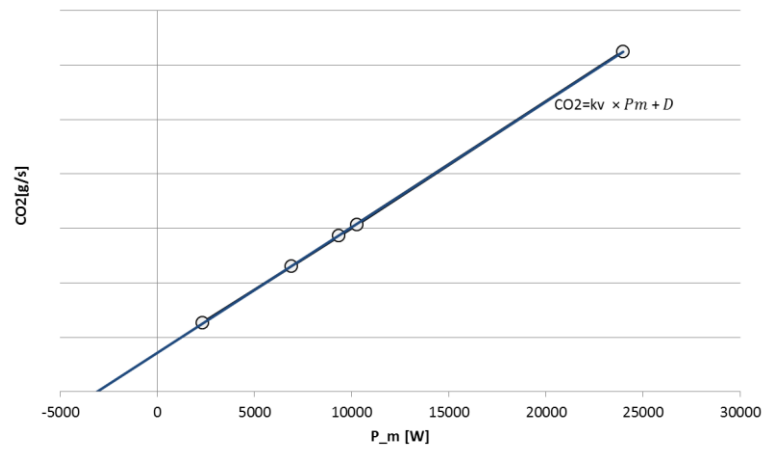


Figure A7/1

Example for the Veline for a LDV from the test results of the 4 WLTC phases. P_m plotted in kW here.

G.2 Amendments in the definition of road load calibration on the chassis dynamometer

The following text is a suggested amendment to the WLTP, Annex 4 "Road load and dynamometer setting" to eliminate unnecessary flexibilities in the calibration of the road load as described in the report in chapter 2.7.

The text relates to the WLTP version ECE/TRANS/WP.29/2014/27 from 20 December 2013. Only paragraphs with suggested amendments are printed below. Other paragraphs are assumed to be unchanged.

Annex 4 Road load and dynamometer setting

8.1. Chassis dynamometer setting by coastdown method

8.1.2. Coastdown

The coastdown test on the chassis dynamometer shall be performed **in accordance to the** procedure given in paragraphs 4.3.1.3.1. and 4.3.1.3.2. of this Annex:

8.1.2.1. Following the vehicle warm-up procedure (paragraph 4.2.4. of this Annex), and immediately prior to each test measurement, the vehicle shall be accelerated to 5 km/h above the speed at which the coastdown time measurement begins ($v_i + \Delta v$) and the coastdown shall be started immediately.

8.1.2.2. The first coast down has to start immediately after the warm-up procedure. The time delay between the end of one coast down and the start of the consecutive coast down shall not exceed 3 minutes.

8.1.2.3. During coastdown, the transmission shall be in neutral, and the engine shall run at idle. Steering wheel movement shall be avoided and the vehicle brakes shall not be operated until the speed drops below the lowest relevant velocity ($v_j - \Delta v$).

Discussion in WLTP IWG resulted in an adoption of the following text in WLTP gtr Phase 1b:

"8.1.2. Coastdown

The coastdown test on the chassis dynamometer shall be performed with the procedure given in paragraphs 8.1.3.2.1. and 8.1.3.2.2. of this Annex and shall start at latest 120 s after completion of the warm up procedure. Consecutive coastdown runs shall be started immediately. At the request of the manufacturer and with approval of the responsible authorities, the time between the warm up procedure and coastdowns using the iterative method may be extended to ensure a proper vehicle setting for the coastdown. The manufacturer shall give the responsible authority evidence for requiring additional time and that chassis dynamometer load setting parameters (e.g. coolant and/or oil temperature, force on a dynamometer) are not affected."

Paragraphs in between unchanged

8.1.3. Verification

As described now in WLTP phase 1a, the deviation of the resulting coast down times or forces against the target values is not limited in the WLTP.

We also do not see an explicit link from the equations for adjustments of road load setting in Annex 4 - Appendix 2 to "8.1.2. Coastdown" but we assume the coast down tests in 8.1.2 shall be used to provide the data for the adjustments according to Appendix 2.

In any case it should be defined, how much the adjusted road load may deviate against the target road load values. This seems to be defined in 8.1.3.2. with +/- 10N but this paragraph is valid only "If the vehicle is accelerated under its own power". We assume the +/-10N limit is applicable in all cases. Text and amendments suggested:

The verification has to be performed with the final settings of the chassis dynamometer after the adjustment of chassis dynamometer load setting described in 8.1.4 and in appendix 2 to Annex 4 of the WLTP. All coastdown runs for the verification shall follow the procedure described 8.1.2.

The calculated forces in the specified speed ranges shall be within a tolerance of ± 10 N after a least squares regression of the forces for two consecutive coastdowns against the target values calculated from the tests in 4.3.

8.1.3.1. The target road load value shall be calculated using the target road load coefficient A_t , B_t and C_t for each reference speed v_j :

$$F_{tj} = A_t + B_tv_j + C_tv_j^2$$

where:

F_{tj} is the target road load at reference speed v_j , N;

v_j is the j^{th} reference speed, km/h.

8.1.3.2. For dynamometer load setting, two different methods may be used. If the vehicle is accelerated by the dynamometer, the methods described in paragraph 8.1.3.2.1. below shall be used. If the vehicle is accelerated under its own power the methods in paragraphs 8.1.3.2.1. or 8.1.3.2.2. below shall be used. The acceleration multiplied by speed shall be approximately 6 m²/sec³.

8.1.3.2.1. Fixed run method

For the fixed-run procedure, the dynamometer software shall automatically run three coastdowns adjusting the set coefficients for each run using the difference between the previous run's measured and target coefficients. The final set coefficients shall be calculated by subtracting the average of the vehicle coefficients obtained from the last two runs from the target coefficients. Optionally, a single stabilization coastdown may be performed before beginning the 2 run averaging sequence.

8.1.3.2.2. Iterative method

The calculated forces in the specified speed ranges shall be within a tolerance of ± 10 N after a least squares regression of the forces for two consecutive coastdowns.

If an error at any reference speed does not satisfy the criteria of the method described in this paragraph, paragraph 8.1.4. below shall be used to adjust the chassis dynamometer load setting.

8.1.4. Adjustment

The chassis dynamometer setting load shall be adjusted in accordance with the procedure specified in Appendix 2 to this Annex, paragraph 1. Paragraphs 8.1.2. and 8.1.3. above (including subparagraphs) shall be repeated.

8.2. Chassis dynamometer load setting using torque meter method

The following effects are assumed.

Torque is measured during constant speed phases in descending order. The longer the speed is kept constant, the higher the rolling resistance is (cool down of tyres) and thus the OEM will get lower driving resistances if he uses short constant speed phases (minimum is defined with 5 seconds in "4.4.2.3. Data collection" in the WLTP). Using short measurement phases should also lead to results comparable to the coast down method since there also short durations per speed bin occur (on average approx. 10 seconds per speed bin if $\Delta v = 5$ km/h as suggested in 4.3.1.4.1. in the WLTP (i.e. 120 seconds for coast down from 120 to 20 km/h).

If the constant speed phases are longer on the chassis dyno during calibration than on the test track, the rolling resistance of the tyres would be higher on the chassis dyno> this would result in lower additional braking forces from the electric machine of the chassis dyno.

The method should demand that the rolling resistance changes similarly over speed on the chassis dyno than on the test track. To be comparable to the coast down method short measurement durations shall be used. To avoid artificial high rolling resistances during the calibration of the chassis dyno road load, the duration of each speed bin shall be limited to the duration the speed was measured on the test track.

8.2.3. Verification

The verification has to be performed with the final settings of the chassis dynamometer after the adjustment of chassis dynamometer load setting described in 8.2.3.3 and in appendix 2 to Annex 4 of the WLTP.

The torque measurement test on the chassis dynamometer shall be performed with the procedure defined in 4.4.2.

The torque meter(s) shall be identical to the one(s) used in the preceding road test.

The difference between v_j and v_{j+1} shall be identical to the differences in the tests performed according to 4.4.2.

The duration each actual speed v_{ji} is run shall be identical to or lower than the duration in the tests performed according to 4.4.2.

The forces measured in the specified speed ranges shall be within a tolerance of ± 10 N to the target values from 4.4.2..