




- (51) International Patent Classification:  
*F41H 7/04* (2006.01)
- (21) International Application Number:  
PCT/EP2014/075865
- (22) International Filing Date:  
27 November 2014 (27.11.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
2011848 27 November 2013 (27.11.2013) NL
- (71) Applicant: **NEDERLANDSE ORGANISATIE VOOR TOEGEPAST-NATUURWETENSCHAPPELIJK ONDERZOEK TNO** [NL/NL]; Anna van Buerenplein 1, NL-2595 DA 's-Gravenhage (NL).
- (72) Inventors: **CARTON, Erik Peter**; c/o TNO/IP & Contracting, Anna van Buerenplein 1, NL-2595 DA 's-Gravenhage (NL). **ROEBROEKS, Geert H.J.J.**; c/o TNO/IP & Contracting, Anna van Buerenplein 1, NL-2595 DA 's-Gravenhage (NL).
- (74) Agent: **JANSEN, C.m.**; V.O., Johan de Wittlaan 7, NL-2517 JR Den Haag (NL).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: BLAST-PROTECTION ELEMENT

Figure 6

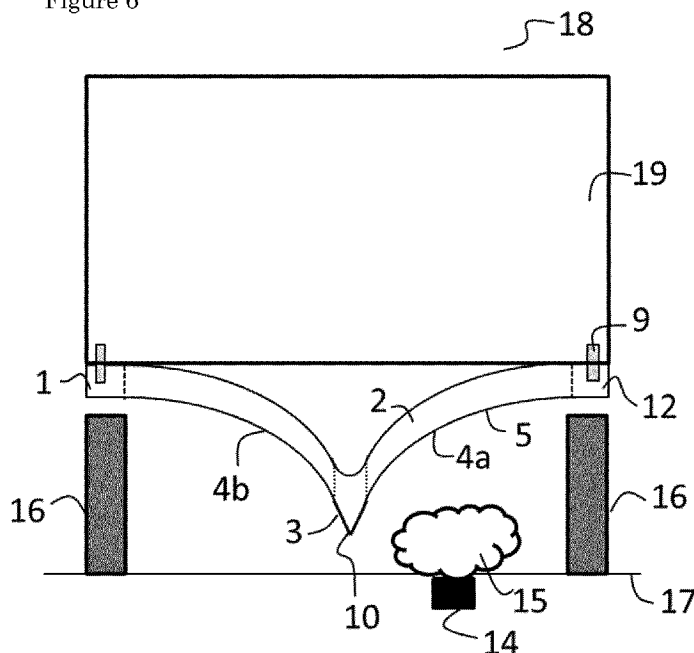

(57) Abstract: The invention relates to a blast-protection element for protecting a vehicle against a blast, said blast-protection element comprising a deformable impact section, wherein said impact section comprises a blast-facing surface, at least one apex part and at least two blast-guiding parts, wherein said blast-guiding parts extend at opposed sides of said apex part, wherein said apex part comprises a protruding apex in said blast-facing surface and wherein said at least two blast-guiding parts each comprise a concave portion of said blast-facing surface wherein the blast guiding parts in total span at least 75 % of the width of the impact section, and wherein more than 90 % of the blast-facing surface of each of said blast-guiding parts is concave.



---

**Published:**

— *with international search report (Art. 21(3))*

## BLAST-PROTECTION ELEMENT

The invention relates to a blast-protection element for a vehicle, a  
5 land vehicle, and a method of manufacturing a land vehicle. Preferably, the  
blast-protection element is for increased protection against land mines  
and/or improvised explosive devices for armoured land vehicles.

Explosive devices such as improvised explosive devices (IED) and  
land mines pose a threat to armoured land vehicles. Such explosive devices  
10 are typically placed on the ground, just above ground level or can be buried.  
Encountering of an explosive device by a land vehicle can trigger the device  
to explode under the vehicle and thus an under-vehicle blast. Such a blast  
can cause injuries or death of passengers of the vehicle and damage to the  
vehicle and cargo. This is not only because the floor of the vehicle can break,  
15 so that hot gasses, debris, shrapnel and floor fragments can enter the cabin,  
but also because of the impact due to the blast. The sudden acceleration of  
the vehicle can cause a shock to a passenger, which can cause brain injuries,  
spine injuries and other visible and invisible trauma. The vehicle may also  
roll-over due to a blast. The risk thereof increases with a higher centre of  
20 gravity of the vehicle.

In recent conflicts, IEDs are more frequently deployed and have  
increased explosive strength. Protective measures for armoured vehicles  
against under-vehicle blasts have therefore become more important.  
However, at the same time, high manoeuvrability and reduced weight are  
25 important requirements for armoured vehicles, for example to allow their  
use in urban environments. For these reasons, a need exists for protective  
measures for vehicles against blasts which allow a vehicle to remain  
relatively light-weight and highly manoeuvrable.

Traditionally, armoured vehicles are provided with a flat floor.  
30 Stiff structures are used to carry loads from blasts from under-vehicle  
mines. The stand-off of the vehicle (distance between ground-level and  
vehicle bottom) is kept as large as possible. The blast pressure is received by

the vehicle bottom, resulting in deformations, which are desired to be limited. Recently, V-shaped hulls have been used for improved protection against IEDs. For example, Stryker vehicles have been manufactured and retrofitted with a V-hull for improved performance against IEDs compared  
5 to the traditional flat-bottom configuration. The downward pointing V-shaped geometry is intended to deflect upward propagating blasts occurring under the vehicle. An exemplary V-shaped (or diamond-shaped) hull design is disclosed in US-A-2007/0 186 762. A disadvantage of V-shaped hulls is that a vehicle provided with such a hull generally has a higher  
10 centre of gravity of the vehicle, which increases the risk of roll-over of the vehicle.

US-B-8 365 649 relates to a composite armour assembly having a convex downward-facing centre surface and concave downward-facing sides, in particular figures 1A and 4E. The major convex centre part results in  
15 worse pulse transfer and limited or no membrane forces under blast loading. US-A-2011/0 088 544, figure 3, relates to an armour plate with side walls in the form of concave chutes, and a broad flat plate in the centre. WO-A-2008/127272 relates to a stepped V-shaped bottom hull for an armoured vehicle, in particular figures 1B and 2.

20 US-A-2012/0 247 315 describes a blast-protection element for a land vehicle having an exterior impact surface defining a cross-sectional profile defining a smooth continuous curve, wherein the exterior impact surface is convex. The blast-protection element is, when in use attached to the vehicle, oriented convexly relative to the ground plane. A disadvantage  
25 of such a blast-protection element is that it is almost horizontal next to its centreline. Blasts occurring near the centreline are thus not efficiently deflected sideward.

US-A-2007/0 084 337 describes a vehicle under-structure comprising an inwardly bent downwardly concave armoured bottom plate

mounted on a bottom of a vehicle, the bottom plate being formed with at least one bending edge extending longitudinally with respect to the vehicle.

US-A-2003/0 010 189 describes a concave, homogenous protective floor plate having a large radius for an armoured vehicle.

5 US-A-2011/0 314 999 disclosed a curved underbelly device for an armoured vehicle including curvilinear, saddle and sinusoidal shapes.

Gurumurthy, "*Blast mitigation strategies for vehicles using shape optimization methods*", master thesis MIT, September 2008, <http://hdl.handle.net/1721.1/45759>, describes the 2D modelling of the flow of  
10 a blast wave around a vehicle with a vehicle hull, including a concave hull, simulated as a non-deformable solid object and having a half consisting of a quarter circle. It was observed that a V-shape showed the best performance over all blast intensity levels in terms of minimising the peak head-on impulse.

15 BIPS 06/FEMA 426: Reference Manual to Mitigate Potential Terrorist Attacks against Buildings, 2nd Edition, October 2011, describes that when an incident pressure wave impinges on a structure that is not parallel to the direction of the wave's travel, it is reflected and reinforced. This results in the structure being exposed to a reflected pressure that is  
20 greater than the incident pressure (or side-on pressure). The reflected pressure varies with the angle of incidence of the shock wave and is typical maximal when shock wave impinges on a perpendicular surface (angle of incidence of 0°), is minimum when the surface is parallel (angle of incidence 90°) and has a maximum due to Mach reflections around 45°. The coefficient  
25 of reflection is typically 2-13.

An alternative approach to protect against blasts is to install suspended seats and energy absorbing materials.

Problems associated with known blast-protection element include a large impulse transmitted to the vehicle from a blast and large  
30 deformation of the blast-protection element by blasts. In addition, the

known blasts shields do not optimally use the tensile strength of the material they are made of.

An objective of the present invention is to provide a blast-protection element that mitigates one or more of the above mentioned problems at least in part. The inventors found that this objective can at  
5 least in part be met by a blast-protection element having a specific design comprising concave elements.

In an aspect, the invention relates to a blast-protection element for protecting a vehicle against a blast, said blast-protection element  
10 comprising a deformable impact section, wherein said impact section comprises a blast-facing surface, at least one apex part and at least two blast-guiding parts, wherein said blast-guiding parts extend at opposed sides of said apex part, wherein said apex part comprises a protruding apex in said blast-facing surface and wherein said at least two blast-guiding parts  
15 each comprise a concave portion of said blast-facing surface wherein the blast guiding parts in total span at least 75 % of the width of the impact section, and wherein more than 90 % of the blast-facing surface of each of said blast-guiding parts is concave.

The term “blast” as used in this application includes a shock-wave  
20 due to an explosion comprising highly compressed air, propagating radially outward from a source at supersonic velocities.

The term “blast-protection element” as used in this application refers to a device or part that serves as a protective cover or barrier for an object at one side of the blast-protection element against a blast (shockwave  
25 of an explosion) impacting the object.

The term “monolithic” as used in this application refers to an object that is a single, unitary piece formed of a material without joints or seams.

The term “apex” as used in this application refers to a protruding  
30 part, such as an outward bulging extreme, for example a cusp or tip. An

apex includes in particular a convex fold in an element wherein the fold extends as a line in a direction. An apex is typically not formed by a recess.

The term “smooth” as used in this application indicates that a surface is continuous and even. Such a surface typically lacks projections or  
5 indentations.

The term “concave” as used in this application refers to a surface that is curving inward as opposed to convex, at least in one direction. The term concave is not restricted to describing a surface with a constant radius of curvature, but rather is used to denote the general appearance of the  
10 surface. The term “concave” includes single concave (*e.g.* as in a hollow cylinder), a saddle curvature and double concave (*e.g.* as in a hollow sphere).

The term “transversal cross-section” as used in this application refers to a cross-section in the plane perpendicular to the longitudinal direction. Such cross-section is typically in the plane perpendicular to a line  
15 defined by the apex. Where a certain profile in a transversal cross-section is described, in principle such a profile in any cross-section will work.

The term “concave blast-guiding part profile section” as used herein refers to a concave section of a transversal cross-sectional profile corresponding to a blast-guiding part of the blast-facing surface of the  
20 impact section

The term “deformable” as used in this application refers to deformation under blast conditions. In particular, deformable relates to objects and/or materials with a finite Young’s modulus, typically a Young’s modulus of 5 GPa to 500 GPa, for example 20 GPa to 230 GPa. In addition, a  
25 deformable object and/or material typically have a yield stress of 10 MPa to 5000 MPa, such as 180 MPa to 2000 MPa. Typically, a deformable object has a defined, finite ultimate strength that is higher than its yield stress by preferably at least 5% of the yield stress and typically is in the range of 30 MPa to 7000 MPa, such as 200 MPa to 2000 MPa. Nevertheless,

fibre-reinforced materials not having a yield stress are also deformable materials.

An important advantage of the blast-protection element is the improved stiffness when subjected to a blast load, due to the curved shape.

5           A further advantage of the blast-protection element of the present invention is improved protection against blasts; resulting in reduced impulse transmitted to the vehicle and/or reduced deformation.

          In addition, the design of the blast-protection element allows deflecting a blast to the sides of the blast-protection element. An advantage  
10 of this is that secondary blast reflections from the ground are reduced.

          Moreover, the design of the present invention allows reducing the reflected pressure at parts of the blast-protection elements close to the source of the blast by having an optimal angle of incidence at these parts. The blast-protection element combines the constructive response to a blast  
15 and the stiffness of a curved plate with a reduced reflected pressure at the apex. The choice of the angle at the apex allows a reduction of the coefficient of reflection from 10 to a lower value in the range of 3 to 5.

          The blast-protection element provides as additional advantage that deformation of the impact section at each side of the apex can be  
20 reduced. As the element comprises concave blast-facing surface portions, the impact section deforms less under the pressure wave of a blast, in comparison to a conventional flat or V-shaped blast-protection element, and to elements with large convex parts, and/or large non-concave centre parts. The main deformations of the blast-protection element according to the  
25 invention are primarily in the form of membrane deformations involving tensile stress (membrane stress) with limited shear stress and limited out-of-plane (plate) bending. This differs from current elements (in particular vehicle floors) consisting in large parts of single or multiple flat sections, or having large convex parts, which mainly deform under bending,  
30 resulting in severe shear loading. Such shear loading causes as



disadvantage considerable larger deformation of the element, potentially threatening for example passengers of a vehicle provided with the element. Hence, the impact section acts preferably at least partially as a shell, resisting the blast at least partly by membrane action.

5           The blast-protection element is suitable for a vehicle. The blast-protection element can comprise a vehicle floor or base plate; or can form a part thereof. The blast-protection element can be used for land-mine and/or IED protection for armoured land vehicles.

10           The blast-protection element comprises an impact section. The impact section can comprises a part adapted for resisting and/or deflecting at least partly a blast, such as a blast occurring at least partly under a vehicle. The impact section is preferably massive and is preferably formed by a curved plate.

15           In addition to an impact section, the blast-protection element can comprise means for attaching the blast-protection element to a vehicle. The attachment can be for example demountable or permanent. The blast-protection element however may also form an integral part of a vehicle.

20           The impact section comprises a blast-facing surface. The blast-facing surface can also be referred to as exterior surface. The blast-facing surface of the impact section comprises the blast-facing surface of the various parts of the impact section that have an exposed surface at the blast-facing side. In use, such as mounted on a land vehicle, the blast-facing surface is typically oriented towards the ground plane, in other words faces the ground.

25           The impact section typically has an interior surface at an interior side opposed to a blast-facing surface at the blast-facing side. An object to be protected by the blast-protection element, such as the vehicle cabin, is located at the interior side. The impact section typically comprises in addition an edge. The edge can comprise two opposed side edge parts and a

front and rear side edge part opposed to each other. In use the edge parts can be positioned at the corresponding sides of the vehicle. The edge of the impact section typically defines a datum.

The blast-protection element has a length, width and height and a  
5 corresponding longitudinal, transversal (lateral) and vertical direction and axis. When used for protecting a vehicle, the longitudinal direction extends parallel to the lengthwise axis of the vehicle (front-rear); the transversal or lateral direction extends perpendicular to the longitudinal direction and generally parallel to the ground plane and the vertical direction extends  
10 perpendicular to the ground plane. Accordingly, in terms of the roll-pitch-yaw convention, roll is around the longitudinal axis, pitch around the transversal axis and yaw around the vertical axis.

The height of the blast-protection element refers to the maximal dimension (span) in vertical direction at the blast-facing side. The depth of  
15 impact section refers to the difference in vertical position between the interior side of the impact section and the side ends of the impact section. The impact section also has a thickness, measured in vertical direction.

The width of the blast-protection element is preferably 200 cm to 300 cm, such as 2.1 m to 2.5 m. The length of the blast-protection element is  
20 typically 2 m to 8 m, such as 3 m to 6 m. The height of the blast-protection element, or impact section, is typically 20 cm to 100 cm, such as 25 cm to 75 cm, such as 30 cm to 50 cm.

The impact section comprises at least one apex part. The apex part comprises a blast-facing surface and comprises in its blast-facing  
25 surface a protruding apex. The impact section can comprise one, two or three apex parts or even more apex parts, each comprising an apex in the blast-facing surface.

The apex part can be positioned at a centred transversal position of the impact section. An example of a centred transversal position of the  
30 impact section is between 40-60 % of the width of the impact section.

Preferably an apex part extends in longitudinal direction, preferably over more than half of the length of the blast-protection element. Preferably, an apex part is stiff, such as reinforced. An apex part extends over the thickness of the impact section and has preferably a larger  
5 thickness than the blast-guiding parts, such as 150 % or more or 200 % or more of the thickness of the blast-guiding parts. Such preferred apex part can provide a stiff spine of the blast-protection element.

Possible forms for the blast-facing surface of an apex part and/or an apex include convexly curved, flat and edged. An apex is typically formed  
10 by the part of the blast-facing surface of the impact section between the concave blast-facing surface portions of two blast-guiding parts. An apex part is preferably non-concave. An apex part preferably spans less than 5 % of the width of the impact section, such as 1 % or less. The apex is preferably sharp.

Preferably, an apex part comprises, or is formed by, a corner edge  
15 (such as a ridge) and the at least two blast-guiding parts are adjacent to the apex part, at opposed sides adjoined to each other at the corner edge. The corner edge can extend in longitudinal direction, preferably over a majority the length of the impact section, preferably over substantially the entire  
20 length (90 % or more) of the impact section. The corner edge can be straight and in longitudinal direction. The impact section can comprise only one edge.

Preferably, an apex part comprises two surfaces at angle in transversal direction and adjoined to each other at a corner edge extending  
25 in longitudinal direction, wherein in the surfaces are at an angle of 60° or less, such as 45° or less to the vertical direction.

The impact section comprises at least two blast-guiding parts, such as two, three, four or more blast-guiding parts. The at least two blast-guiding parts extend at opposed sides of an apex part, preferably at  
30 two sides opposed in transversal direction.

The blast-guiding parts can guide a blast at least partly to the (side) edges of the impact section and thus to sides of the blast-protection element. Accordingly, the blast-guiding parts can guide an under-vehicle blast at least partly to the sides of a vehicle.

5           The blast-guiding parts and/or apex part can be structurally integrated, such as in case of a monolithic impact section. The blast-guiding parts and/or apex part can also be structurally separate elements of the impact section.

10           The blast-guiding parts span the width of the impact section at least partly. The blast guiding parts in total span at least 75 % of the width of the impact section, preferably as 90 % or more, typically up to 95 % of the width. Accordingly, an apex part can be thin and span (in total for all apex parts) less than 25 % of the width of the impact section, such as 10 % or less or 5 % or less.

15           The at least two blast-guiding parts each comprise a concave blast-facing surface portion. Accordingly, each of the at least two blast-guiding parts has a blast-facing surface comprising a portion that is concave. Both a concave blast-facing surface portion and an apex lie in a blast-facing surface of the impact section. A concave blast-facing surface  
20           portion accordingly lies at the same blast-facing side of the impact section as an apex.

          Each blast-guiding part comprises a concave blast-facing surface portion. More than 90 % of the blast-facing surface, of the blast-guiding part is concave, of each blast-guiding part. Preferably, substantially the entire  
25           blast facing surface is concave, preferably for each blast-guiding part.

          The concave curvature of the concave blast-facing surface portion provides as advantage over convex parts and over faceted blast-guiding parts with few facets and large kinks, that stress caused by the impact of a blast is dispersed in the blast-guiding part, as in a membrane. The concave  
30           blast-facing surface portion thus advantageously avoids concentration of

shear stresses and stresses in edges. The loads are transferred in-plane to the sides of the blast-guiding parts. The concavity provides as advantage that, in use, the part of blast-facing surface close to the edge can have a large stand-off, allowing a blast to exit, while the blast-facing surface close to the apex can have an oblique angle to a blast that provides an advantageous reflection coefficient for a blast wave. In this way, design of the concave blast-facing surface portion can contribute to deflecting a blast occurring under a vehicle.

A concave blast-facing surface portion thus has at least one osculating circle at the blast-facing side. Accordingly, a concave-blast facing surface portion has a radius of curvature in at least one direction. The osculating circle is preferably in the plane of a transversal cross-section (perpendicular to the longitudinal axis). Preferably a blast-guiding part, preferably all, has a blast-facing surface with a portion with at least one negative principal curvature. The entire blast-facing surface can have at least one negative principal curvature, preferably in the vertical direction.

The concave blast-facing surface portion preferably has a radius of curvature between 10 % and 5000 % of the width of the blast-protection element (degree of concavity), such as, within this range, 10 % or greater, 50 % or greater, 70 % or greater, 100 % or greater, 2000 % or less, 1000 % or less, 500 % or less. The radius of curvature of the concave blast facing surface portion is finite and defined; otherwise the blast-facing surface portion is not concave.

The concave blast-facing surface portion of a blast-guiding part can have such degree of concavity that for any first point at the blast facing surface in this surface portion, it comprises a second point in that same surface portion at a distance of 50 cm or less (chord length), such that the distance from the midpoint of the chord between the two points to the surface, taken perpendicular to the chord (versine measurement), is preferably more than 1 cm, such as 2 cm or more, or 4 cm or more. The

chord midpoint lies preferably outside the blast-guiding part to the blast-facing side. Preferably, the first and second points lie in the same transversal cross-sectional plane (at the same longitudinal position). Accordingly, the concave blast-facing surface portion can comprise small  
5 convex nubs of *e.g.* less than 5 mm, that do not affect the concavity as measured with a chord of 50 cm or less. The concave blast-facing surface portion can even be dimpled (as an inverse golf ball surface). The concave blast-facing surface portion can also be faceted with many facets and small kinks to approach the curvature. Preferably, the blast-facing surface of the  
10 impact section is concave over more than 60 % of its surface, such as 80 % or more or 90 % or more; with a degree of concavity as described. The blast-facing surface portion preferably has a negative mean curvature. Accordingly, the blast-facing surface of the blast-guiding part can be more concavely curved in the transversal cross-section than curved in  
15 longitudinal direction.

Preferably, the impact-section has a constant thickness. Preferably, the impact section has a mid-plane (plane defined by half of the thickness) with a concave curvature as is preferred for the blast-guiding surface. This provides improved stiffness compared to a flat and other plates  
20 by virtue of the membrane forces within the impact section.

Figure 1 schematically shows an exemplary embodiment of a blast-protection element. Blast-protection element 1 comprises impact section 2. Impact section 2 comprises apex part 3 and blast-guiding parts 4a and 4b extending at opposed sides of apex part 3. Impact section 2 has  
25 blast-facing surface 5 and optional interior surface 6. Blast-guiding parts 4a and 4b comprise a blast-facing surface portion 7a, respectively 7b, which are concave. As a guide to the eye, osculating circle 8 is drawn indicating that blast-facing surface portion 7b is concave, as osculating circle 8 lies at the blast-facing side. In addition, apex part 3 comprises apex 10 in blast-facing

surface 5. The impact of a blast (not shown) is in direction d2 and apex 10 is pointing in blast-facing direction d1.

Figure 2 schematically shows a transversal cross-section of an exemplary embodiment of a blast-protection element. Apex part 3 extends  
5 over the thickness of impact section 2 and comprises apex 10 in blast-facing surface 5. Apex part 10 is a flat non-curved surface part that protrudes in blast-facing surface 5. Apex 5 is a flat surface portion. Blast-protection element 1 comprises means for attachment 9. Concave blast-facing surface portion 7a comprises a point p1 and a point p2 defining chord c. Chord c has  
10 versine distance v from its midpoint m to point p3 on the blast-facing surface, this versine distance is more than 1 cm, while chord c is less than 50 cm.

Preferably, each of the blast guiding parts can, at least partially, deform as a concave membrane under external blast loading. Accordingly,  
15 preferably each blast guiding deforms predominantly through in-plane deformations under external blast loading.

Preferably, the impact section is formed by one or more a deformable sheets, for example deformable bend plates. On impact of a blast, the impact section can in this way deform as a membrane and absorb  
20 the load caused by the blast. Preferably, the blast-protection element, in particular the impact section and the deformable sheet, comprises, or is formed of, a deformable material.

Preferably, the impact section is formed of a composite material. In a further preferred option, the impact section is formed of a material  
25 comprising a metal or alloy. Particularly preferred is an impact section formed of a fibre metal laminate wherein the fibre metal laminate comprises a laminate of several thin metal layers bonded with layers of fibre-reinforced composite material.

Suitable deformable materials include composite materials and  
30 metals, including alloys. Suitable metals include steel, titanium, aluminium

and magnesium. Preferably, the composite material is a fibre reinforced material. Examples of suitable fibre reinforcement include glass fibres, carbon fibres, aramide fibres, ultra-high weight polyethylene. Examples of suitable matrix materials include polyurethane, epoxy, polyester, and  
5 polyvinylester. Suitable fibre metal laminates include for example glass laminate aluminium reinforced epoxy and central reinforced aluminium (CentrAl®) and aramid aluminium laminate (ARALL®), available from Alcoa, Inc. Fibres are preferably applied at least partly in the direction of the concave curvature and/or as woven material, preferably with the warp  
10 in the transversal direction, for optimal benefit of the tensile strength.

A preferred option for materials comprises a combination of different types of materials. Metal can for instance be combined with composite. The metal reinforcement can be between layers of flexible materials or in open spacing between different layers consisting of equal or  
15 different materials. Blast-protection elements formed of metal or an alloy may be produced using conventional processes and using techniques such as roll forming, bending. Blast-protection elements formed of a composite material can be made using technologies known in aircraft and ship manufacturing, such as moulding and stamping.

20 The design of the impact section advantageously allows for benefitting of the tensile strength of the material. Preferably, the impact section is made, at least in part of high-tensile strength materials such as composite materials comprising a fibre reinforcement of aramid fibres, or ultra high molecular weight polyethylene. The impact section can be in the  
25 form of as a bent plate or panel. The impact section, in particular blast-guiding parts, can have a substantially uniform thickness. The thickness is optionally 5 mm to 50 mm, such as 10 mm to 30 mm, such as 15 mm to 25 mm, in particular in the case of a steel impact section. For composite concave shapes the material thickness can be significant thicker,  
30 such as 10 mm to 300 mm, such as 50 mm to 150 mm.



Optionally, the concave blast-facing surface portion is smooth. For example, the blast-facing surface portion can optionally be free of projections or indentations of more than 30 cm, preferably free of projections or indentations of more than 10 cm. Optionally, the smooth blast-facing surface portion comprises only projections or indentations of no more than 20 cm, such as of 1 cm or less.

The blast facing surface of the impact section can optionally be entirely smooth, such that it does not comprise any hard angles or sharp corners and contains no protrusions or recess of more than 20 cm, preferably more than 10 mm. In addition, the concave blast-facing surface portion can optionally be continuous in position and/or tangential continuous (C1 continuous). This provides the advantage that a blast is deflected more smoothly and/or that stress is dispersed in the blast-guiding part. The blast facing surface can optionally comprise a joint between a blast-guiding part and an apex part. Preferably, the joint is smooth and C1 continuous. This avoids localisation of stress at the joint. Preferably, the impact section is monolithic; preferably also the blast-protection element is monolithic. This advantageously provides improved strength and blast resisting properties compared to non-monolithic impact sections of the same material.

Preferably, the blast-facing surface of the impact section defines a transversal cross-sectional profile comprising an apex between two concave profile sections corresponding to two of the blast-guiding parts. The two concave blast-guiding part profile sections can define an angle (A) outwardly around the apex of preferably more than 180°. Accordingly, the blast-facing surface lies at the outside of the apex.

The concave blast-guiding part profile sections are the sections of the transversal cross-sectional profile (profile sections) defined by concave blast-facing surface portions of blast-guiding parts. Preferably, the two concave blast-guiding part profile sections are directly adjacent to an apex. Angle A is suitably defined by the tangent lines of a point in each of the two

blast-guiding part profile sections. As the blast-guiding part profile sections are concave, angle A preferably decreases from apex to side edge of the impact section. Angle A is preferably  $180^\circ$  to  $240^\circ$  at the side ends. At the joints between the apex and the blast-guiding part profile sections, angle A  
5 is preferably  $340^\circ$  to  $270^\circ$ . This provides the advantage that blast-facing surface of the impact section close to the apex is relatively sharp and thus faces blast at a large angle having a small coefficient of reflection.

Preferably, the blast-facing surface of the impact section, and in particular the transversal cross-sectional profile thereof, has, in a region  
10 adjacent to an apex wherein the vertical distance between the blast-facing surface and the apex is less than 25% of the height of the impact section, an angle of incidence with a blast wave propagating in vertical direction of  $45^\circ$ , more preferably  $60^\circ$  or more.

Herein, an angle of incidence of  $0^\circ$  indicates a wave propagating  
15 perpendicular to the surface and an angle of  $90^\circ$  indicates a wave propagating parallel to the surface. In this way, the reflected pressure is minimised at the parts of the impact section close to the apex and generally closer to a blast source. The curvature of the blast-guiding parts allow an increase of the incident angle towards the edges of the impact sections,  
20 which are generally further from a blast source. As the angle of incidence determines a coefficient of reflection which is a ratio between the peak reflected pressure and the peak incident pressure, it is most important to minimise the coefficient of reflection where the peak incident pressure is the highest.

25 For each feature defined in a transversal-cross sectional profile, the impact section preferably has a cross-sectional profile with this feature over 50 % or more, such as 75 % or more or 90 % or more of the length of the impact section.

Figure 3 schematically shows a cross-sectional profile of an  
30 exemplary impact section. Impact section 2 comprises a blast-facing surface

5 defining a cross-sectional profile 11 comprising apex 10 between two concave blast-guiding part profile sections 7a and 7b. Apex 10 is convexly curved. Blast-guiding part profile sections 7a and 7b define an angle (arc) A outwardly around apex 10. As profile section 7b is part of the profile 11 of the blast-facing surface, its concave curvature is as viewed in direction d2, from the outside of impact section 2, not in direction d1. Accordingly, angle A is as around apex 10 outside impact section 2, not inwardly through impact section 2. Angle A will vary between various parts of concave blast-guiding part profile sections 7a 7b due to the concave curvature of these parts. Angle A decreases going from apex 10 to side edge 12 of the impact section.

Preferably, an apex is positioned in the centre part of the cross-sectional profile; preferably this is the only apex of the impact section.

15 The centre part of the cross-sectional profile refers to the centre of the profile of the blast-facing surface of the impact section in a transversal cross-section and the parts of the cross-sectional profile forming 5 % of the width of the impact section adjacent at both sides.

The impact section preferably comprises an apex that lies at a distance in the range of 30 % to 70 %, such as 40 % to 60 %, of the width of the impact section from the sides of the impact-section, at both sides of the apex, in the transversal cross-sectional profile.

Alternatively, the impact section can comprise two apex parts, one comprising an apex at about a quarter of the width of the impact section from a side edge of the impact section and the other comprising an apex at about a quarter of the width of the impact section from an opposite side edge, each provided with blast-guiding parts at opposed sides of the apex in transversal direction, wherein each blast-guiding part has a width of about a quarter of the width of the impact section. Herein about a quarter of the width includes 20-30 % of the width. The impact section can further comprise a joint between the two inner blast-guiding parts.

Preferably, the transversal cross-sectional profile of the blast-facing surface of the impact section is concave of a majority of the arc length of the cross-sectional profile, such as substantially entirely or more than 90 % or more than 70 % or more than 80 %. This provides good blast  
5 deflecting properties and dispersion of stresses in the impact section, in particular for advantageous membrane deformation.

Preferably, in the transversal cross-sectional profile, the apex and the ends of the two concave blast-guiding part profile sections define a triangle with an included angle at the apex of 60° to 180°, such as 100° to  
10 150°. In some embodiments, the height of the impact section, alternatively the distance in vertical direction from an apex to a datum defined by the edges of the impact section, is 1-150 % of the width of the impact section, such as 5 % or more, 10 % or more, 30 % or more, 50 % or more, 100 % or less, 75 % or less, within this range.

15 The blast-guiding part profile section can define a smooth, continuous curve, such as positional and tangential continuous (C1 continuous). Preferably, the curve is substantially symmetric at both sides of the apex part. A blast-guiding part profile section can for example define a circular or elliptical arc, such as a circle part.

20 Figure 4 schematically shows an exemplary impact section 2 having a width  $w$ , a height  $h$ , a depth  $d$  and a thickness  $t$ . Thickness  $t$  is different at various positions in the impact section. Apex 10 and side ends 12a and 12b define a triangle with included angle  $B$  (for clarity only halve angle  $B$  is shown).

25 Preferably, the blast-facing surface of the impact section defines a transversal cross-sectional profile having the general form of an inwardly curved V-shape. The V-shape is preferably curved inwardly such that a chord from the apex to the side ends lies outside the impact section at the blast-facing side. The V-shape is preferably curved inwardly by such amount  
30 that, for a chord from an apex to a side end of the impact section, the

distance from the midpoint of the chord to the blast-facing surface is 1-50 % of the length of the chord, such as 5-30 %. The V-shape is typically inwardly curved toward the interior side of the impact section. The form of the inwardly curved V-shape can optionally also be described as a gull-wing  
5 curve. The cross-sectional profile can optionally also be described as an inflexed arch shape. Such a profile advantageously has horizontal ends (at the side edge of the impact section) and a sharp apex.

Preferably, the height of the impact section is 1-30 % or 10-40 % of the width of the impact section. This provides as advantage that the  
10 stand-off height is smaller. Compared to a blast-protection element with an impact section having a cross-sectional profile formed by two quarter circles (with a ratio of height to width of 1:2), the stand-off height can be smaller and a better stability of the vehicle can be obtained.

Preferably, the blast-protection element comprises means for  
15 attaching the blast-protection element to a vehicle, preferably at the interior side of the impact section. The means for attaching the blast-protection element can be adapted for permanently or demountable attaching the blast-protection element to a vehicle. The means for attaching are optionally structurally integrated in the blast-protection element and/or the impact  
20 section. Examples of suitable means for attaching include adhesives and fasteners, such as for bolt holes, clamps, screws, rivets, glue.

The blast-protection element can be directly or indirectly secured to a cabin and/or a frame of vehicle, such as by welding, gluing or using fasteners such as bolts. The attaching means can also comprise integral  
25 vehicle attachment structures, such as flanges, which are adapted for interfacing with a vehicle design. Preferably, the blast-protection element comprises means for attaching to a vehicle at the apex part and/or at the side edges, for optimal membrane deformation. Reinforcement of the impact section at the apex part and/or the side edges and the corresponding parts of  
30 the vehicle frame is preferred. Preferably, the blast-protection element

comprises a reinforcing frame at the apex part and/or side edges at the interior side.

Preferably, the blast-protection element comprises one or more reinforcing ribs extending at the interior side of the impact section. Such reinforcing ribs can increase the load bearing capacity and stiffness of the impact section by increasing the moment of inertia of the impact section. This is especially advantageous for an impact section which is at least partly formed from a fibre-reinforced composite, preferably a fibre metal laminate comprising a laminate of several thin metal layers bonded with layers of fibre-reinforced composite material.

Preferably, the reinforcing ribs extend in transversal direction over the width of the blast-protection element. The reinforcing ribs can accordingly reinforce the blast-protection element against deformations in transversal direction. This is preferably combined with a reinforcing frame at the apex part and/or side edge.

The height of the ribs can be typically 0.5-2 times the thickness of the impact section. The height of the ribs can also be such that the ribs span the depth of the impact section. Optionally, the ribs are monolithically part of the impact section. The blast-protection element can thus comprises one or more ribs extending across the impact section, at the interior side thereof, between two blast-guiding parts and an apex part there between.

The ribs can extend in vertical direction at the interior side of the blast-protection element from an apex part of the impact section over preferably 5-100 % of the depth of the impact section, such as 5-20 %. The ribs can span the depth of the impact section or even stand out from the impact section. In this way, the ribs can provide a vertical reinforcement for the apex part. Preferably, one or more ribs span the distance in vertical direction from the interior side of the impact section to the vehicle bottom. The ribs can in this way connect the apex part and the vehicle frame in use.

The ribs can further comprise means for attaching or integrating the blast-protection element to the vehicle.

Figure 5 shows a blast-protection element with a rib.

Blast-protection element 1 comprises impact section 2 and means for  
5 attachment 9, which are bolt holes. Impact section 2 comprises apex part 3  
and blast-guiding parts 4a and 4b. Blast-protection element 1 further  
comprises rib 13. Rib 13 spans the width of the impact section and the depth  
of the impact section and lies at interior side 6 of the impact section.

The apex preferably points in a blast-facing direction. The apex  
10 can thus act as a break-up structure for a blast coming from that direction.  
As the apex is relatively sharp (in comparison with conventional V-shape  
floors), the impact section can have an advantageous angle of incidence and  
a highly reduced coefficient of reflection. This minimises the reflection  
overpressure experienced in the area of the apex while creating an increased  
15 stiffness of the curved sheet at each side of the apex

In a further aspect, the invention relates to a vehicle comprising a  
blast-protection element as described. The vehicle is preferably a land  
vehicle. The blast-protection element can furthermore be attached to water  
vehicles, buildings and other objects. Preferably, the blast-protection  
20 element is structurally integrated with the vehicle at the bottom of the  
vehicle. The blast-protection element can also be attached to, or integrated  
in, the frame of the land vehicle.

Optionally, the blast-protection element is attached to a land  
vehicle at the bottom of the land vehicle as a blast shield. The  
25 blast-protection element can also be attached to a side of the vehicle. The  
land vehicle is typically a wheeled, tracked and/or motorised land vehicle,  
for example an armoured land vehicle. The land vehicle can for example be  
an armoured motorised wheeled land vehicle, such as an MRAP  
(Mine-Resistant Ambush Protected) vehicle. The vehicle typically comprises  
30 a cabin with two sides, a front and a rear. The impact section preferably

spans 90 % or more of the length and/or width of the vehicle cabin, such as entirely.

The wheels of the vehicle can define a ground plane and the blast-protection element can be orientated such that the apex points  
5 towards the ground plane, in vertical direction. Preferably, the vehicle has a stand-off above the ground and clear space between the vehicle floor and the ground. The stand-off is preferably 50-150 cm, such as 90-110 cm, preferably at the sides of the vehicle. Due to the design of the impact section, the clear  
10 space typically increases from an apex to a side edge of the impact section, preferably the rate of increase decreases from an apex to a side edge. Preferably, the vehicle has open sides between the ground and the cabin. This allows under-vehicle blasts that are at least partly deflected to the sides to exit from under the vehicle.

Figure 6 shows a cross section of a vehicle comprising a  
15 blast-protection element. Vehicle 18 comprises cabin 19. Blast-protection element 1 comprising apex part 3 and blast-guiding parts 4a and 4b is attached to the vehicle by attachment means 9. Vehicle 18 in addition comprises wheels 16, which are also attached to the vehicle by a suspension (not shown). Vehicle 18 drives over ground plane 17 and over IED 14. This  
20 triggers a blast 15, which is deflected by blast-guiding part 4a and apex part 3. Apex 10 points in the direction of ground plane 17. The clear space, between ground plane 17 and blast-facing surface 5, increases from apex 10 to side edge 12 of the impact section. Apex part 3 faces blast 15 at an oblique angle, thereby reducing the reflected overpressure, while parts of the impact  
25 section 2 close to side edge 12 are perpendicular to the impact of blast 15. These parts have a higher coefficient of reflection, however the distance from the blast is larger and the reflected overpressure at these parts is not too large. The blast-protecting element 1 has improved stiffness due to the curved shape of the impact section 2 which is advantageous for protection  
30 against blasts.



In yet a further aspect, the invention relates to a method of manufacturing a land vehicle comprising a blast-protection element, comprising attaching a blast-protection element as described to a vehicle as described. The blast-protection element can be mounted or integrated into a vehicle during original manufacture of a vehicle. The blast-protection  
5 element can also be retro-fitted onto an existing vehicle, such as by welding, adhesives and/or fasteners. The blast-protection element may replace a blast-protection element of another design (*e.g.* a straight V-hull). The blast-protection element can be used in a method of operating a land vehicle  
10 as described, comprising driving the land vehicle, wherein a concave blast-facing surface portion of the blast-guiding parts is facing the ground. The element can be used for protection of objects against a blast, such as for protection against improvised explosive devices and/or land mines.

All references cited herein are hereby completely incorporated by  
15 reference to the same extent as if each reference were individually and specifically indicated to be incorporated by reference and were set forth in its entirety herein.

The use of the terms “a” and “an” and “the” and similar referents in the context of describing the invention (especially in the context of the  
20 claims) are to be construed to cover both the singular and the plural, unless otherwise indicated herein or clearly contradicted by context. The terms “comprising”, “having”, “including” and “containing” are to be construed as open-ended terms (*i.e.*, meaning “including, but not limited to”) unless otherwise noted. Recitation of ranges of values herein are merely intended  
25 to serve as a shorthand method of referring individually to each separate value falling within the range, unless otherwise indicated herein, and each separate value is incorporated into the specification as if it were individually recited herein. The use of any and all examples, or exemplary language (*e.g.*, “such as”) provided herein, is intended merely to better illuminate the  
30 invention and does not pose a limitation on the scope of the invention unless

otherwise claimed. No language in the specification should be construed as indicating any non-claimed element as essential to the practice of the invention. For the purpose of the description and of the appended claims, except where otherwise indicated, all numbers expressing amounts, quantities, percentages, and so forth, are to be understood as being modified in all instances by the term "about". Also, all ranges include any combination of the maximum and minimum points disclosed and include and intermediate ranges therein, which may or may not be specifically enumerated herein.

10 Preferred embodiments of this invention are described herein. Variation of those preferred embodiments may become apparent to those of ordinary skill in the art upon reading the foregoing description. The inventors expect skilled artisans to employ such variations as appropriate, and the inventors intend for the invention to be practiced otherwise than as specifically described herein. Accordingly, this invention includes all  
15 modifications and equivalents of the subject-matter recited in the claims appended hereto as permitted by applicable law. Moreover, any combination of the above-described elements in all possible variations thereof is encompassed by the invention unless otherwise indicated herein or  
20 otherwise clearly contradicted by context. The claims are to be construed to include alternative embodiments to the extent permitted by the prior art.

For the purpose of clarity and a concise description features are described herein as part of the same or separate embodiments, however, it will be appreciated that the scope of the invention may include  
25 embodiments having combinations of all or some of the features described.

The invention will be further elucidated by the following examples, which are not intended to be limiting the scope of protection in any way.

Example 1

A numerical simulation was carried out to compare blast-protection elements with various designs. Four different designs (figure 7) were evaluated: 1. Flat floor (comparative) 2. V floor (comparative) (also: VEE) 3. Gull floor 4. Modified shallow profile Gull wing floor (also: GULL-LOW). In figure 7, A is position 1 (centre line), B is position 2: 0.3 m from centre line, C is position 3; 1.15 m from centre line, total width vehicle is 2.3 m. The finite element models of designs 1-4 are shown in front view in Figure 8.

The flat floor was evaluated with a standoff of 1.0 m. The other floor designs were evaluated with a standoff of 0.5 m at the lowest point which provided a consistent cabin height for the Flat, V and Gull wing floors at 1.0 m. The Gull-low floor had the cabin floor lowered by 200 mm to 0.8 m. The standoffs are summarised as follows:

Table 1

	Standoff Lowest Point [m]	Standoff of cabin floor [m]	Height of floor section [m]
Flat	1.0	1.0	0
V	0.5	1.0	0.5
Gull	0.5	1.0	0.5
Gull-low	0.5	0.8	0.3

For the evaluation the dimensions of the idealised cabin and floor were: width = 2.3 m; length = 3.0 m; height of cabin = 1.5 m; standoff for flat floor = 1.0 m; standoff for other designs = 0.5 m (standoff to lowest point); height of V and Gull wing floor = 0.5 m; height of Gull-low wing floor = 0.3 m. The properties of the idealised floor were: elastic-plastic steel,  $E = 211$  GPa; density =  $7850 \text{ kg/m}^3$ , yield stress = 1100 MPa, 20 mm thick. The properties of the idealised cabin were: rigid, density =  $22000 \text{ kg/m}^3$ , 20 mm

thick. Four blasts were used: A: 6 kg TNT (2,4,6-trinitrotoluene), centre; B: 6 kg TNT, 30 cm from centre; C: 6 kg TNT, 115 cm from centre (side of vehicle); D: CONWEP hemispherical surface, 12 kg TNT, 115 cm from centre (side of vehicle). For blasts A-C, buried sandy gravel with 100 mm  
5 depth of bury was used. Transversal offsets from the centreline were 0, 30 and 115 cm. The different floor shapes are evaluated by global and local criteria: Global (impulse transmitted from blast) and Local (deformation of the floor).

The results for the global criteria comparison are shown in table 2  
10 and table 3. The results show that the gull wing floor has the best shape for reducing the impulse transmitted to the vehicle for all locations apart from the side position where a higher flat floor is better as shown in table 2 and table 3. This is due to the fact that the lowest portion of the gull wing has a sharper profile (smaller included angle) than the V floor. Therefore, the  
15 reflected pressure at this part is minimised in the gull wing floor. Figure 10 9 shows predicted displacements of floor for different load cases. Table 3 shows the predicted transmitted global impulse. Table 2 gives predicted deformations of floors for different load cases (deflection in mm).

The results for the local performance comparison are shown in  
20 table 2 and figure 9. The deformation of the floors was evaluated at four different locations: 1) 0 cm ( on the centreline); 2) 30 cm from the centreline; 3) 50 cm from the centreline; 4) 115 cm from the centreline (side of vehicle).

The results show that the gull wing design provides the stiffest floor section with the lowest vertical displacement of the floor for the  
25 different load cases as shown in table 2. This is due to two aspects:

1: the sharper profile of the gull wing in the centre part of the vehicle and the smaller included angle between floor and blast wave displacement direction, resulting in a more favourable sideward reflection of the blast wave, resulting in reduced transmitted impulse to the vehicle and

2: an increased stiffness because of the curved contour of the panel, being able to resist the pressure of the blast by membrane stress in the curved skin, rather than by bending stress as in a flat sheet.

The deformed geometry of the different floor types are shown figure 9 with deformation contours for a centrally located buried charge load case. Due to the stiffer spine section of the gull wing floor and surrounding curved profile, this design produces the lowest vertical deformation in comparison to the others under the same conditions. Fringe levels are shown (contours of vertical displacement at 2 ms). The fringe level scale differs between the panels. The reduced section gull wing also performs well in comparison to the other designs with the benefit of providing a lower cabin floor (lowered by 200 mm).

### Example 2

Figure 10 shows the results of a simulation of the deformation upon impact of a blast of a Gull wing blast-protection element according to the invention (left side) and a V-shape blast-protection element (comparative, right side). This example is the same configuration and the result of the same calculation as for example 1. The simulations differed only in the shape of the impact section. The simulation was for 25 ms using finite element analysis. Figure 10 shows the results in transversal cross-sections through the centre of the deformed area as snapshots at 1.0, 1.5, 2.0, 5.0, 10.0 and 25.0 ms. Only half of the blast-shield is shown. The two blast shields are simulated independently from each other. Figure 10 shows the half blast-protection element side by side for ease of comparison; they are not simulated as attached to each other. The grey scale of the shading indicates the fringe levels as sheet deformation in meters. The contour of the initial shape is shown as a guide to the eye. The actual contour in each snapshot shows the deformation. Figure 10 shows that the Gull-wing

blast-protection element deformed less severe and had lower fringe levels than the V-shape blast-protection element.

Table 2	CENTRE BURIED				115 CM BURIED			
	FLAT	VEE	GULL	GL	FLAT	VEE	GULL	GL
CS	1	1	1	0.8				
	1	2	3	4	1	1	1	0.8
J tot	17174	27768	28495	27765	9052	11958	10525	12098
J calc	17174	16912	12764	18235	9052	13474	12551	13819
P	16868	15285	10034	16376	8636	12099	11237	13093
Mass	1085	1182	1219	1137	1085	1182	1219	1137
	10078	10585	10380	10257	10078	10585	10380	10257
	11163	11767	11599	11394	11163	11767	11599	11394
V	1.51	1.30	0.87	1.44	0.77	1.03	0.97	1.15
Defl 0 cm	124	45	24	73	36	17	10	22
30 cm	115	80	38	86	43	69	21	42
50 cm	87	49	21	55	47	75	20	39
115 cm	63	52	31	59	61	54	56	80
V 0 cm	136	56	25	60	33	14	15	24
30 cm	88	81	52	88	42	36	17	31
50 cm	55	36	21	43	53	58	24	42
115 cm	2.8	1.82	1.6	2.25	1.85	1.89	2.1	2.6
	30 CM BURIED				115 CM DETONATION			
	FLAT	VEE	GULL	GL	FLAT	VEE	GULL	GL
CS	1	1	1	0.8	1	1	1	0.8
J tot	16959	26571	26194	26338				
J refl	16959	18691	16406	20711				
P	16625	16935	13414	18919	12198	12163	12750	12892
Mass	1085	1182	1219	1137	1085	1182	1219	1137
	10078	10585	10380	10257	10078	10585	10380	10257
	11163	11767	11599	11394	11163	11767	11599	11394
V	1.49	1.44	1.16	1.66	1.09	1.03	1.10	1.13
Defl 0 cm	89	72	47	109	59	15	14	23
30 cm	100	161	84	158	51	60	29	41
50 cm	89	112	33	85	42	66	24	34
115 cm	81	50	28	70	62	46	48	62
V 0 cm	88	62	46	78	29	8	17	20
30 cm	136	170	106	164	32	32	27	33
50 cm	92	77	49	88	37	46	25	34
115 cm	2.9	2.1	1.4	2.3	2	1.8	1.84	2.1
CS: corner standoff (m), J tot: total impulse (Ns), J calc: calculated impulse, J refl: reflected impulse, P: momentum (Ns) V: velocity (m/s) Defl: deflection / displacement (mm) at 0 cm (centre) to 115 cm (side), GL: Gull-Low								

Table 3

Global Impulse (Ns)	FLAT	VEE	GULL	GULL-LOW
0 cm 6kg buried	16868	15285	10034	16376
30 cm 6kg buried	16625	16935	13414	18919
115 cm 6kg buried	8636	12099	11237	13093
115 cm - 12kg hemispherical surface CONWEP	12198	12163	12750	12892



Claims

1. A blast-protection element (1) for protecting a vehicle against a blast, said blast-protection element (1) comprising a deformable impact section (2), wherein said impact section comprises a blast-facing surface (5), at least one apex part (3) and at least two blast-guiding parts (4a, 4b), wherein said  
5 blast-guiding parts (4a, 4b) extend at opposed sides of said apex part (3), wherein said apex part comprises a protruding apex (10) in said blast-facing surface and wherein said at least two blast-guiding parts each comprise a concave portion of said blast-facing surface (7a, 7b), wherein the blast guiding parts in total span at least 75 % of the width of the impact section,  
10 and wherein more than 90 % of the blast-facing surface of each of said blast-guiding parts is concave.
2. A blast-protection element according to claim 1, wherein each of the blast guiding parts can, at least partially, deform as a concave  
15 membrane under external blast loading.
3. A blast-protection element according to claim 1 or 2, wherein said blast-facing surface of said impact section defines a transversal cross-sectional profile (11) comprising said apex (10) between two profile  
20 sections corresponding to two of said blast-guiding parts (7a, 7b), wherein said two concave profile sections define an angle (A) outwardly around said apex of more than 180°.
4. A blast-protection element according to claim 3, wherein said apex  
25 (10) is positioned in a centre part of said transversal cross-sectional profile.

5. A blast-protection element according to claim 4, wherein said transversal cross-sectional profile (11) is concave over more than half of the arc length of said transversal cross-sectional profile.
- 5 6. A blast-protection element according to any one of claims 1-5, wherein said blast-facing surface (5) of said impact section (2) defines a transversal cross-sectional profile (11) having the general form of an inwardly curved V-shape.
- 10 7. A blast-protection element according to any one of claims 1-6, wherein the blast-facing surface (5) of the impact section (2) has, in a region adjacent to an apex wherein the vertical distance between the blast-facing surface and the apex is less than 25 % of the height of the impact section, an angle of incidence with a blast wave propagating in vertical direction of 45°  
15 or more.
8. A blast-protection element according to any one of claims 1-7, wherein the blast-facing surface (5) of the impact section (2) has, in a region adjacent to an apex wherein the vertical distance between the blast-facing  
20 surface and the apex is less than 25 % of the height of the impact section, an angle of incidence with a blast wave propagating in vertical direction of 60° or more.
9. A blast-protection element according to any one of claims 1-8,  
25 wherein the height of the impact section (2), is more than 30 % of the width of the impact section.
10. A blast-protection element according to any one of claims 1-9, comprising means for attaching (9) the blast-protection element (2) to a  
30 vehicle (18).

11. A blast-protection element according to any one of claims 1-10,  
wherein said impact section comprises an interior side (6) opposite said  
blast-facing surface and wherein said blast-protection element comprises  
5 one or more reinforcing ribs (13) extending at the interior side of the impact  
section.

12. A blast-protection element according to claim 11, wherein said  
impact section is at least partly formed from a fibre-reinforced composite.

10

13. A blast-protection element according to claim 11 or 12, wherein  
said impact section is at least partly formed from a fibre metal laminate  
comprising a laminate of several thin metal layers bonded with layers of  
fibre-reinforced composite material.

15

14. A blast-protection element according to any one of claims 1-13,  
wherein said apex (10) points in a blast-facing direction.

15. A blast-protection element according to any one of claims 1-14,  
20 wherein the impact section is formed from a composite material.

16. A blast-protection element according to any one of claims 1-15,  
wherein the impact section is formed from a material comprising a metal or  
alloy.

25

17. A blast-protection element according to any one of claims 1-16,  
wherein the impact section is formed from a fibre metal laminate  
comprising a laminate of several thin metal layers bonded with layers of  
fibre-reinforced composite material.

30

18. A land vehicle (18) comprising a blast-protection element (1) according to any one of claim 1-17.

19. A method of manufacturing a land vehicle according to claim 18,  
5 comprising attaching a blast-protection element according to any one of claims 1-17 to a vehicle.

Figure 1

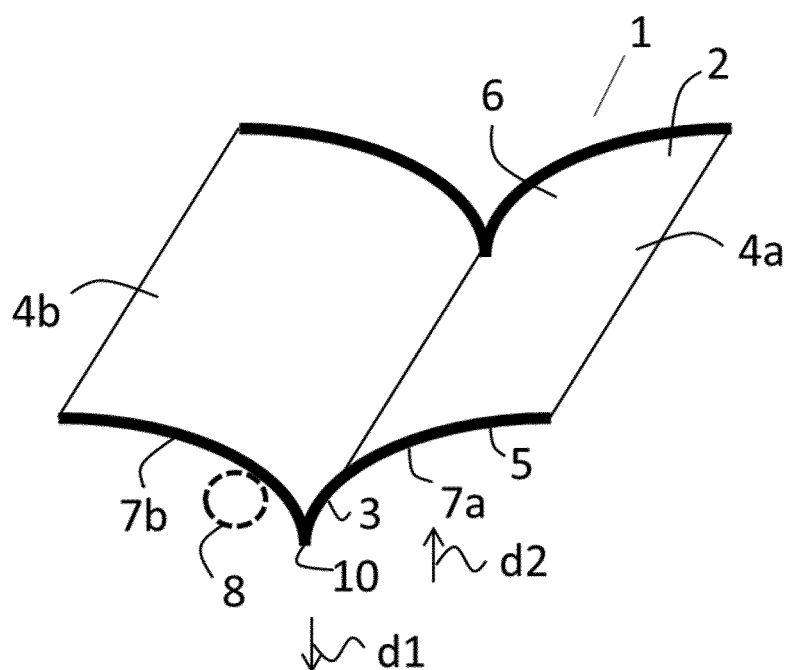


Figure 2

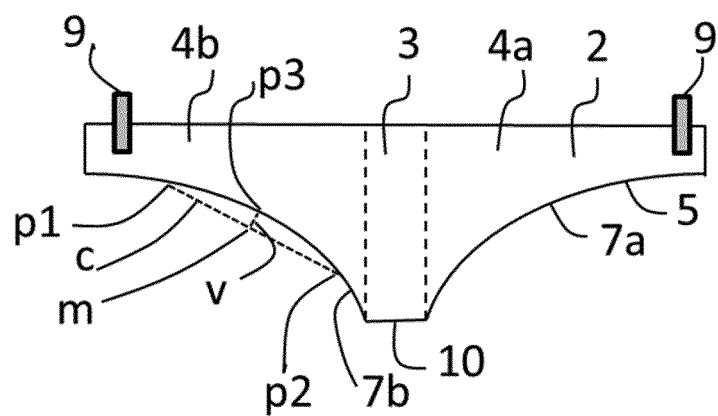


Figure 3


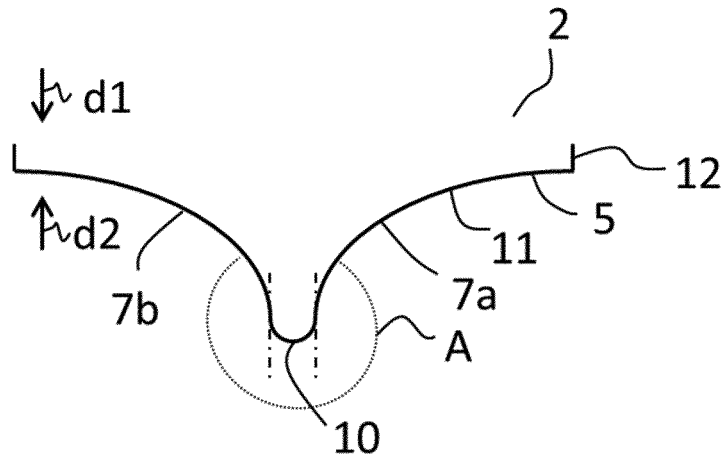


Figure 4

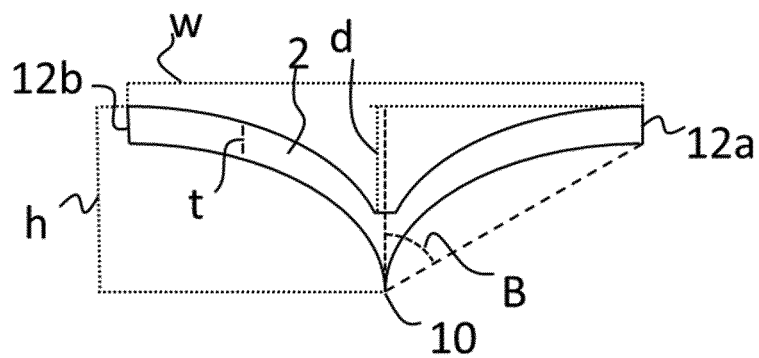

3/6

Figure 5

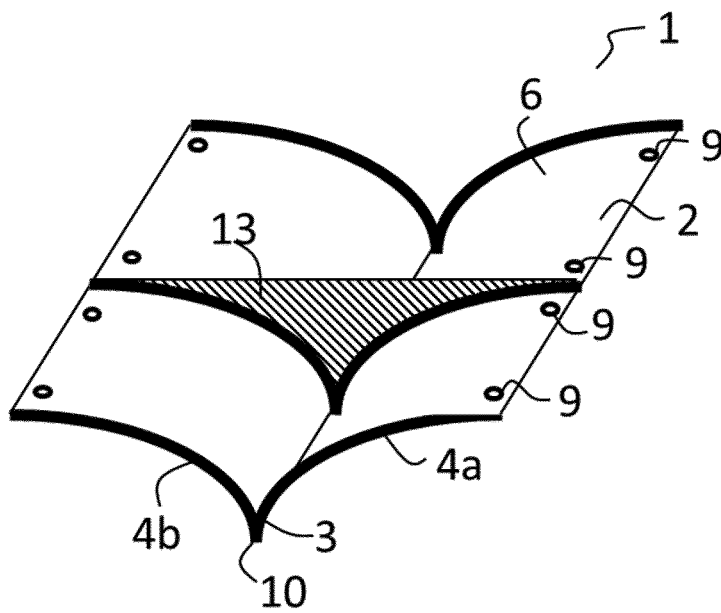


Figure 6

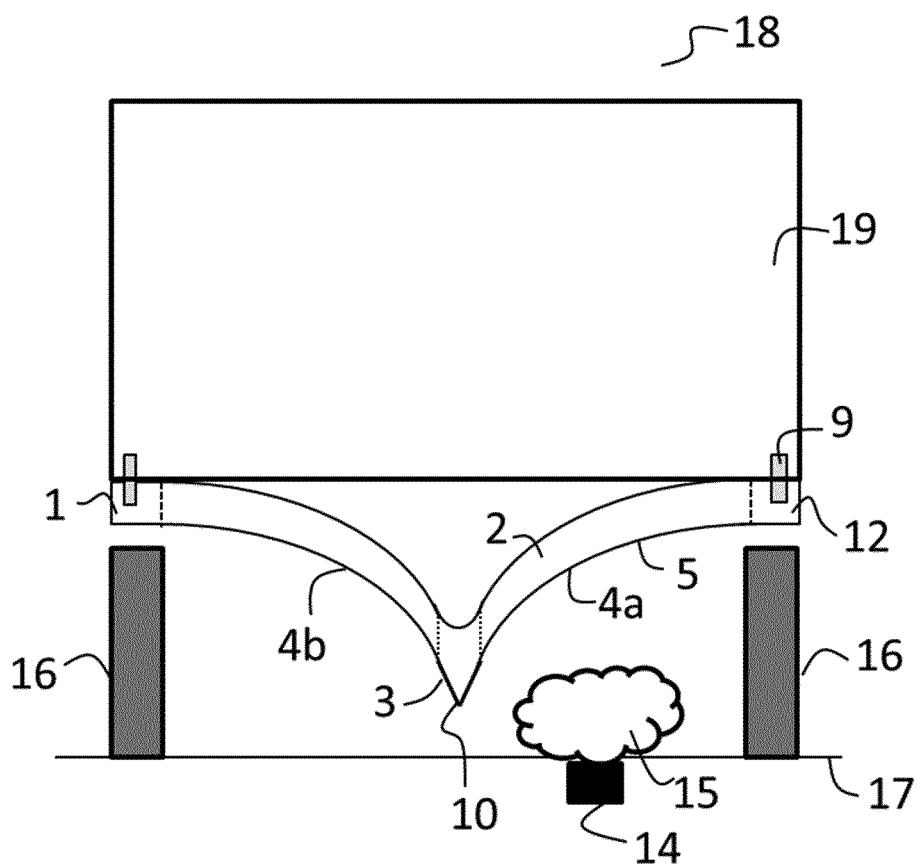


Figure 7





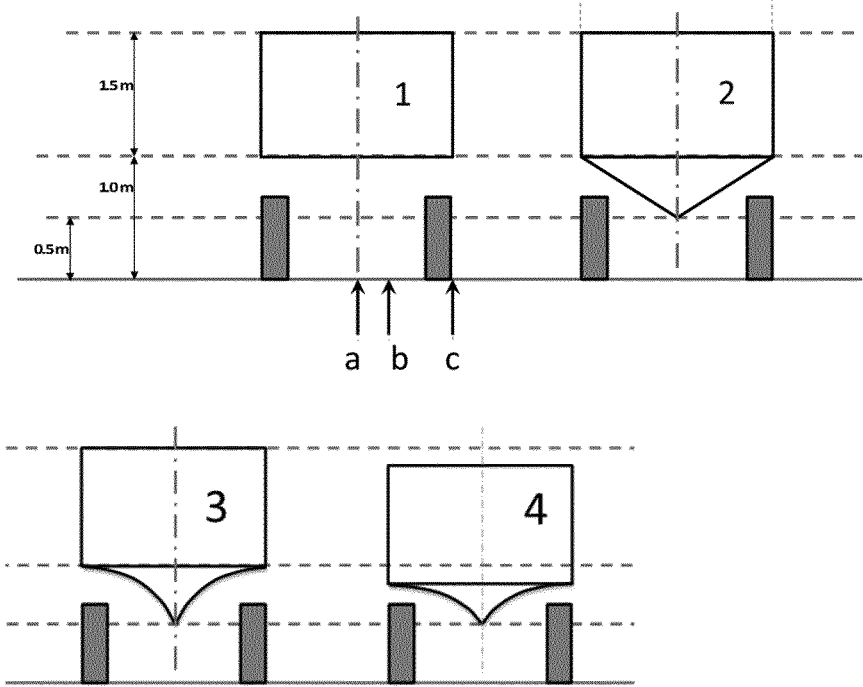



Figure 8

FLAT (comparative)	V (comparative)	GULL	GULL-LOW
			




5/6

Figure 9

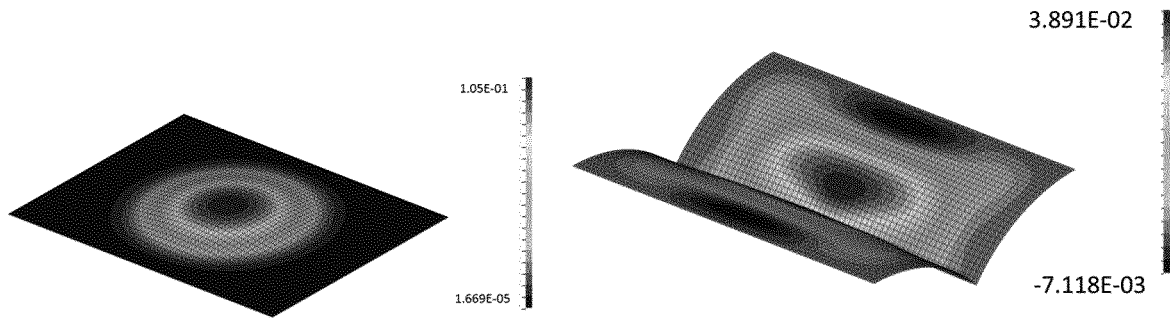


FLAT

GULL

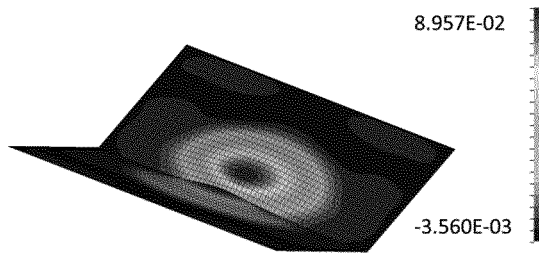


VEE

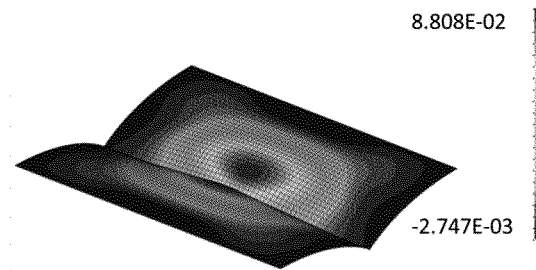

GULL-LOW

6/6

Figure 10

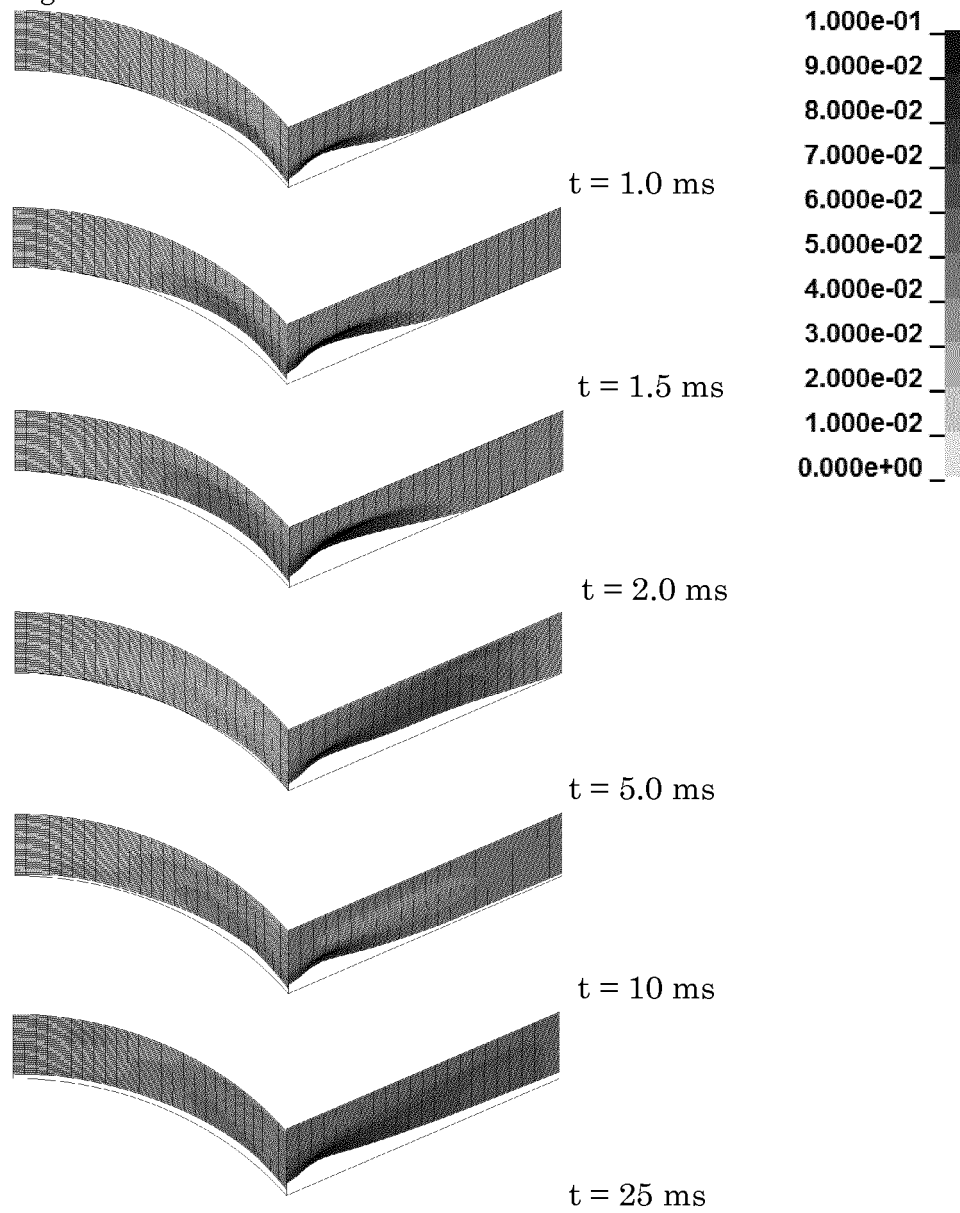

## INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2014/075865

A. CLASSIFICATION OF SUBJECT MATTER  
 INV. F41H7/04  
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
 F41H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2013/014635 A1 (KOSHELEFF PATRICK ANDREW [US]) 17 January 2013 (2013-01-17)	1-3, 5-11,14, 16,18,19
Y	paragraphs [0007], [0008], [0021], [0022], [0027] - [0029], [0052], [0054] figures 1-6, 8	4,12,13, 15,17
Y	----- US 8 365 649 B1 (ANDREWS MARK D [US]) 5 February 2013 (2013-02-05) cited in the application column 8, lines 25-42 column 8, line 61 - column 9, line 3 figures 1A, 4E, 4F ----- -/--	4,12,13, 15,17



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

26 January 2015

Date of mailing of the international search report

02/02/2015

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040,  
 Fax: (+31-70) 340-3016

Authorized officer

Van Leeuwen, Erik

## INTERNATIONAL SEARCH REPORT

International application No  
PCT/EP2014/075865

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2011/088544 A1 (BETTENCOURT BENOIT [FR] ET AL) 21 April 2011 (2011-04-21) cited in the application paragraphs [0021], [0034] - [0038], [0041], [0043] figure 3 -----	1-19
A	EP 2 327 950 A2 (GEN DYNAMICS LAND SYSTEMS CANADA CORP [CA]) 1 June 2011 (2011-06-01) paragraphs [0024], [0025], [0027], [0030] - [0032], [0034] figures 1, 7 -----	1-19

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2014/075865

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2013014635	A1	17-01-2013	NONE
-----			
US 8365649	B1	05-02-2013	NONE
-----			
US 2011088544	A1	21-04-2011	CA 2726664 A1 17-12-2009
		EP 2304381 A1 06-04-2011	
		EP 2685205 A1 15-01-2014	
		FR 2932557 A1 18-12-2009	
		US 2011088544 A1 21-04-2011	
		WO 2009150330 A1 17-12-2009	
-----			
EP 2327950	A2	01-06-2011	EP 2327950 A2 01-06-2011
		US 2011168001 A1 14-07-2011	
		US 2013312595 A1 28-11-2013	
-----			