

Europlatform, 2016–2024

Offshore wind resources at the North Sea



TNO 2025 R11110 – 27 May 2025

Offshore wind resources at the North Sea

Europlatform, 2016–2024

Author(s)	D. A. J. Wouters M. F. van Dooren E. K. Fritz E. T. G. Bot J. P. Verhoef G. Bergman P. A. van der Werff
Classification report	TNO Public
Number of pages	60 (excl. front and back cover)
Number of appendices	1
Sponsor	Dutch Ministry of Climate Policy and Green Growth
Project name	2024 Wind Conditions @ North Sea
Project number	060.59137

All rights reserved

No part of this publication may be reproduced and/or published by print, photoprint, microfilm or any other means without the previous written consent of TNO.

©2025 TNO

Revision

Rev.	Date	Description	Page †
0.1	1 May 2025	First version	
0.2	7 May 2025	Second version after updating tables, figures and references	
0.3	26 May 2025	Third version after final revision	
1.0	27 May 2025	Final version for release	

†: (a) customer request, (b) correction, (c) addition

Archiving

<https://365tno.sharepoint.com/teams/P060.59137/>

		 
TNO Wind Energy is accredited conform ISO / IEC 17025 and accepted as RETL under IECRE WE. › Power performance measurements conform to IEC 61400-12-1, MEASNET Power Performance measurement procedure, FGW TR2, FGW TR5 › NTF/NPC measurements conform to IEC 61400-12-2 › Mechanical loads measurements conform to IEC 61400-13 › Meteorological measurements (wind speed, wind direction, temperature, air pressure and relative humidity) conform to IEC 61400-50-1 › Verification of ground-based or nacelle-mounted Remote Sensing Devices conform to IEC 61400-50-2 › Verification of Floating Lidar Systems conform to IEC 61400-50-2 and IEA Recommended Practices 18		

RvA is participant in the ILAC MRA.

In case copies of this report are made, only integral copying is allowed.

Summary

The Netherlands has set clear ambitions to accelerate the energy transition. By 2050 all energy used in the country shall come from sustainable sources and offshore wind energy plays a vital role in the transition to a carbon-free energy supply. The government has defined a roadmap for the Dutch offshore wind portfolio aiming to expand to 21 GW by 2032. By the end of 2023 an installed capacity of 4.7 GW was already achieved, surpassing the original goal of 4.5 GW. Several wind farms with a combined capacity of 6.5 GW are currently under construction in the wind farm sites *Hollandse Kust West* and *IJmuiden Ver*. The Netherlands is moving ahead with almost yearly tendering rounds for upcoming development areas. Tenders for the *Nederwiek* wind farm site are expected to start in late 2025.

TNO has been performing offshore wind measurement campaigns at strategic locations in the North Sea since 2011 with the installation and data management of both a 100-metre meteorological mast and a co-located lidar situated 75 km west of IJmuiden. From 2014 onwards, TNO has further organised wind measurement campaigns with lidars on offshore platforms for the Dutch Ministry of Economic Affairs and Climate Policy (now for the Ministry of Climate Policy and Green Growth). These campaigns are part of the *Wind op Zee* project to support the Dutch offshore wind roadmap. They consist of three long-standing locations: Lichteiland Goeree (LEG), Europlatform (EPL) and Wintershall platform K13-A. Since 15 March 2023 a lidar has been deployed for wind measurements at a fourth platform, L2-FA-1, located north of the Wadden Islands. Currently TNO is investigating possible options for a fifth measurement platform, where measurements could start in the beginning of 2026. TNO is accredited for performing the aforementioned measurements in accordance with IEC 61400-50-2.

This report refers to the measurement campaign at the EPL platform where a ZX300M has been deployed, providing high quality data since 2016. The data are publicly available to be used for further purposes (offshorewind-measurements.tno.nl).

At the EPL platform, the wind analysis for the 2016–2024 period shows that the wind profiles are dominated by the regional climate, mainly caused by the positive phase effect of North Atlantic Oscillation (NAO). The prevailing wind direction is from the south-west with a mean direction ranging from 237.2° to 240.4° across the different sensor heights (63 m to 291 m). The average wind speed ranges from 9.07 m/s at the lowest measurement height of 63 m up to 10.34 m/s at 291 m. The Weibull distribution, indicating the variability of the wind regime throughout the measurement period, shows a wind speed distribution with typical offshore scale (k) and shape (c) parameters ($k = 2.08$ and $c = 11.03$ m/s at 141 m height).

Contents

Summary	4
Contents	5
List of tables and figures.....	6
Abbreviations	9
1 Introduction.....	10
2 Wind measurement campaigns at the North Sea	12
2.1 TNO's leading role in wind condition measurement campaigns	12
2.2 Open-access and public datasets	12
3 Measurement campaign at EPL	14
3.1 Location, lidar installation and operation.....	14
3.2 Health and safety measures	14
3.3 Lidar performance assessment at EPL	16
4 Wind conditions at EPL	19
4.1 Distributions.....	19
4.2 Turbulence intensity.....	21
4.3 Wind shear and veer	23
5 Conclusions and recommendations	26
Acknowledgements.....	28
References.....	29
Appendix	
Appendix A: Annual wind conditions during the campaign at EPL	30

List of tables and figures

Tables

2.1	Publication history of wind conditions at EPL	12
3.1	Replacements of lidars at the EPL platform.....	16
3.2	Down-time periods and actions taken at EPL platform during the year 2024.....	16
3.3	List of variables measured by the lidar.....	17
3.4	Annual lidar data availability.....	18
4.1	Wind speed and wind direction statistics	20
4.2	Weibull parameters for the wind speed distributions at all heights	21
A.1	Wind speed and wind direction statistics for 2016	34
A.2	Wind speed and wind direction statistics for 2017	35
A.3	Wind speed and wind direction statistics for 2018	36
A.4	Wind speed and wind direction statistics for 2019	37
A.5	Wind speed and wind direction statistics for 2020	38
A.6	Wind speed and wind direction statistics for 2021	39
A.7	Wind speed and wind direction statistics for 2022	40
A.8	Wind speed and wind direction statistics for 2023	41
A.9	Wind speed and wind direction statistics for 2024	42
A.10	Weibull parameters for 2016	43
A.11	Weibull parameters for 2017	43
A.12	Weibull parameters for 2018	43
A.13	Weibull parameters for 2019	43
A.14	Weibull parameters for 2020	44
A.15	Weibull parameters for 2021	44
A.16	Weibull parameters for 2022	44
A.17	Weibull parameters for 2023	44
A.18	Weibull parameters for 2024	45

Figures

1.1	TNO's long-term offshore wind measurement campaign.....	11
3.1	Europlatform	15
3.2	Lidar unit at EPL	15
3.3	Monthly lidar data availability	18
4.1	Wind roses for the complete measurement campaign.....	19
4.2	Wind speed distributions.....	20
4.3	Weibull pdf of wind speed distribution at 141 m.....	21
4.4	Turbulence intensity at 63 m.....	22
4.5	Turbulence intensity at 91 m.....	22
4.6	Turbulence intensity at 116 m.....	22
4.7	Turbulence intensity at 141 m.....	22
4.8	Turbulence intensity at 166 m.....	22
4.9	Turbulence intensity at 191 m.....	22
4.10	Turbulence intensity at 216 m.....	22
4.11	Turbulence intensity at 241 m.....	22

4.12	Turbulence intensity at 266 m.....	23
4.13	Turbulence intensity at 291 m.....	23
4.14	Average wind speed and wind direction per height.....	24
4.15	Wind shear and veer as function of wind speed and direction.....	24
4.16	Wind shear and veer as function of the month-of-year.....	25
4.17	Wind shear and veer as function the hour-of-day.....	25
4.18	Wind shear and veer as function of wind speed.....	25
4.19	Wind shear and veer as function of wind direction.....	25
A.1	Wind roses for 2016.....	30
A.2	Wind roses for 2017.....	30
A.3	Wind roses for 2018.....	31
A.4	Wind roses for 2019.....	31
A.5	Wind roses for 2020.....	31
A.6	Wind roses for 2021.....	32
A.7	Wind roses for 2022.....	32
A.8	Wind roses for 2023.....	32
A.9	Wind roses for 2024.....	33
A.10	Wind speed distributions for 2016.....	34
A.11	Wind speed distributions for 2017.....	35
A.12	Wind speed distributions for 2018.....	36
A.13	Wind speed distributions for 2019.....	37
A.14	Wind speed distributions for 2020.....	38
A.15	Wind speed distributions for 2021.....	39
A.16	Wind speed distributions for 2022.....	40
A.17	Wind speed distributions for 2023.....	41
A.18	Wind speed distributions for 2024.....	42
A.19	Wind shear and veer as function of the month-of-year for 2016.....	46
A.20	Wind shear and veer as function of the month-of-year for 2017.....	46
A.21	Wind shear and veer as function of the month-of-year for 2018.....	46
A.22	Wind shear and veer as function of the month-of-year for 2019.....	46
A.23	Wind shear and veer as function of the month-of-year for 2020.....	47
A.24	Wind shear and veer as function of the month-of-year for 2021.....	47
A.25	Wind shear and veer as function of the month-of-year for 2022.....	47
A.26	Wind shear and veer as function of the month-of-year for 2023.....	47
A.27	Wind shear and veer as function of the month-of-year for 2024.....	48
A.28	Wind shear and veer as function the hour-of-day for 2016.....	49
A.29	Wind shear and veer as function the hour-of-day for 2017.....	49
A.30	Wind shear and veer as function the hour-of-day for 2018.....	49
A.31	Wind shear and veer as function the hour-of-day for 2019.....	49
A.32	Wind shear and veer as function the hour-of-day for 2020.....	50
A.33	Wind shear and veer as function the hour-of-day for 2021.....	50
A.34	Wind shear and veer as function the hour-of-day for 2022.....	50
A.35	Wind shear and veer as function the hour-of-day for 2023.....	50
A.36	Wind shear and veer as function the hour-of-day for 2024.....	51
A.37	Wind shear and veer as function of wind speed for 2016.....	52
A.38	Wind shear and veer as function of wind speed for 2017.....	52
A.39	Wind shear and veer as function of wind speed for 2018.....	52
A.40	Wind shear and veer as function of wind speed for 2019.....	52
A.41	Wind shear and veer as function of wind speed for 2020.....	53
A.42	Wind shear and veer as function of wind speed for 2021.....	53
A.43	Wind shear and veer as function of wind speed for 2022.....	53
A.44	Wind shear and veer as function of wind speed for 2023.....	53

A.45	Wind shear and veer as function of wind speed for 2024	54
A.46	Wind shear and veer as function of wind direction for 2016	55
A.47	Wind shear and veer as function of wind direction for 2017	55
A.48	Wind shear and veer as function of wind direction for 2018	55
A.49	Wind shear and veer as function of wind direction for 2019	55
A.50	Wind shear and veer as function of wind direction for 2020	56
A.51	Wind shear and veer as function of wind direction for 2021	56
A.52	Wind shear and veer as function of wind direction for 2022	56
A.53	Wind shear and veer as function of wind direction for 2023	56
A.54	Wind shear and veer as function of wind direction for 2024	57
A.55	Wind shear and veer as function of wind speed and direction for 2016.....	58
A.56	Wind shear and veer as function of wind speed and direction for 2017.....	58
A.57	Wind shear and veer as function of wind speed and direction for 2018.....	58
A.58	Wind shear and veer as function of wind speed and direction for 2019.....	59
A.59	Wind shear and veer as function of wind speed and direction for 2020.....	59
A.60	Wind shear and veer as function of wind speed and direction for 2021.....	59
A.61	Wind shear and veer as function of wind speed and direction for 2022.....	59
A.62	Wind shear and veer as function of wind speed and direction for 2023.....	60
A.63	Wind shear and veer as function of wind speed and direction for 2024.....	60

Abbreviations

EEZ	exclusive economic zone
EPL	Europlatform
GWO	Global Wind Organisation
HUET	helicopter underwater escape training
IEC	International Electrotechnical Commission
IECRE WE	IEC system for certification to standards relating to equipment for use in Renewable Energy applications – Wind Energy
ILAC MRA	International Laboratory Accreditation Cooperation Mutual Recognition Arrangement
ISO	International Organisation for Standardisation
kde	kernel density estimate
KNMI	Koninklijk Nederlands Meteorologisch Instituut (Royal Netherlands Meteorological Institute)
LEG	Lichteiland Goeree
MMIJ	meteorological mast IJmuiden
MoMM	mean of monthly means
MSL	mean sea level
NAO	North Atlantic Oscillation
OWEZ	Offshore Windpark Egmond aan Zee (Offshore wind farm Egmond aan Zee)
pdf	probability density function
RETL	Renewable Energy Testing Laboratory
RI&E	risico-inventarisatie en evaluatie (risk-assessment and evaluation)
RvA	Raad voor Accreditatie (Dutch Accreditation Council)
TI	Turbulence Intensity
TNO	Nederlandse Organisatie voor toegepast-natuurwetenschappelijk onderzoek (Netherlands Organisation for applied scientific research)
UTC	coordinated universal time
WRA	wind resource assessment

1 Introduction

The Netherlands has set clear ambitions to accelerate the energy transition. By 2050 all energy used in the country shall come from sustainable sources and offshore wind energy plays a vital role in the transition to a carbon-free energy supply [1]. The government has defined a roadmap for the Dutch offshore wind portfolio aiming to expand to 21 GW by 2032 [2]. By the end of 2023 an installed capacity of 4.7 GW was already achieved, surpassing the original goal of 4.5 GW [3]. Several wind farms with a combined capacity of 6.5 GW are currently under construction in the wind farm sites *Hollandse Kust West* and *IJmuiden Ver*. The Netherlands is moving ahead with almost yearly tendering rounds for upcoming development areas. Tenders for the *Nederwiek* wind farm site are expected to start in late 2025 [4].

To achieve such an ambitious realisation of operational offshore wind farms in the Dutch part of the North Sea, importance must be given to both spatial planning, and characterisation of the precious, valuable and volatile wind resource in order to ensure profitability and an overall sound business case. One crucial requirement to evaluate the financing of an offshore wind farm is therefore the wind resource assessment (WRA) of a given site. Accurate long-term offshore wind measurements allow for improved WRAs which reduce uncertainties and increase the financial success of these projects. This increases the trust between interested stakeholders including developers, consultants, the financial community, the government and policymakers. At the same time it allows the selection and identification of strategic locations.

TNO has been performing offshore wind measurement campaigns at strategic locations in the North Sea since 2011 with the installation and data management of both a 100-metre meteorological mast and a co-located lidar situated 75 km west of IJmuiden. From 2014 onwards, TNO has further organised wind measurement campaigns with lidars on offshore platforms for the Dutch Ministry of Economic Affairs and Climate Policy (now for the Ministry of Climate Policy and Green Growth). These campaigns are part of the *Wind op Zee* project to support the Dutch wind offshore roadmap. They consist of three longstanding locations: Lichteiland Goeree (LEG), Europlatform (EPL) and Wintershall platform K13-A. Since March 2023 a lidar has been deployed for wind measurements at a fourth platform, L2-FA-1, located north of the Frisian Islands (figure 1.1). Discussions with platform operators are currently ongoing with the aim of finding a fifth suitable measurement location in the vicinity of the wind farm development search area *Ten noorden van de Waddeneilanden*. TNO is accredited for performing the aforementioned wind measurements in accordance with IEC 61400-50-2 [5].

This report will focus on the wind conditions characterisation of the EPL platform, located about 60 km west from the coast of Hoek van Holland.

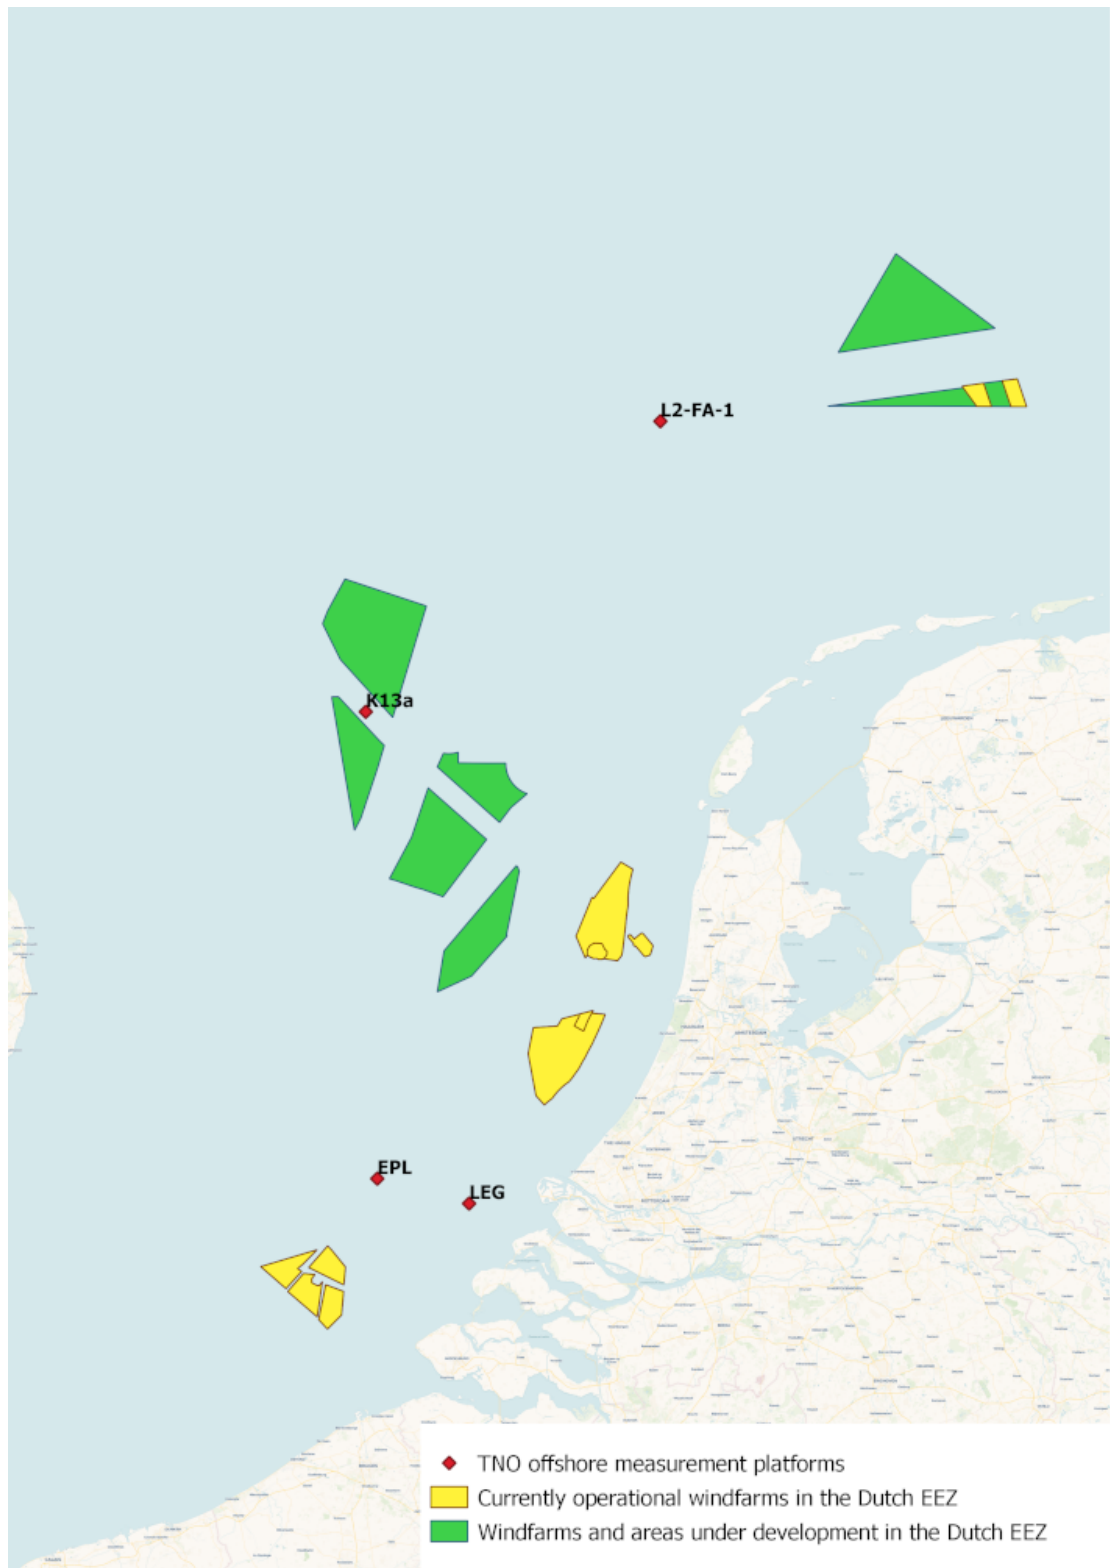


Figure 1.1: TNO's long-term offshore wind measurement campaign locations at Lichteiland Goeree (LEG), Europlatform (EPL), Wintershall platform K13-A (K13a) and L2-FA-1, along with wind farm development zones in the Dutch North Sea.

2 Wind measurement campaigns at the North Sea

2.1 TNO's leading role in wind condition measurement campaigns

Before the introduction of lidars in offshore wind resource assessments, meteorological masts have been widely used at TNO with examples such as the meteorological mast at IJmuiden (MMIJ), and the meteorological mast at the Offshore wind farm Egmond aan Zee (OWEZ).

Onshore measurement campaigns have also been part of the activities of TNO for more than 20 years, including independent ISO 17025 and IECRE based measurements (power performance, mechanical loads, meteorological measurements, remote sensing device verification and floating lidar verification) to support wind turbine prototype certification from small (330 kW) to larger turbines (>10 MW). During the measurement campaign, TNO is responsible for each part of the process: from selection of the instrumentation and planning the installation, to the purchase, validation, installation, and maintenance of the lidar, as well as analysing, reporting and dissemination of the data.

2.2 Open-access and public datasets

Since 2020 TNO has published annual reports on the wind conditions for the EPL location, see table 2.1. These reports are available at offshorewind-measurements.tno.nl. This report includes the specific wind conditions for the period 2016–2024 at the EPL platform. The present report has been updated with improved practices for deducing the wind direction, wind veer and wind shear.

Table 2.1: Publication history of wind conditions at EPL

Period	Report
2016–2019	TNO 2020 R10551 [6]
2016–2020	TNO 2021 R10919 [7]
2016–2021	TNO 2022 R10909 [8]
2016–2022	TNO 2023 R10578 [9]
2016–2023	TNO 2024 R11675 [10]

The data measured in the *Wind op Zee* project are retrieved and post-processed before making the information publicly accessible through the web-service nimbus.windopzee.net. Post-processed data are reported each month for verification purposes. Users can download the data after free registration.

To use *Wind op Zee* measurement data in publications, further research or commercial purposes, users must acknowledge the use of the data as:

1. citation to the instrumentation report *with the type of data used, location and date*:

```
author      = {Bergman, G. and Verhoef, J. P.},  
institution = {TNO},  
title       = {Europlatform lidar measurement campaign},  
subtitle    = {Instrumentation Report 2024},  
number      = {TNO 2024 R10960},  
date        = {2024-06-28},  
url         = {https://publications.tno.nl/publication/34642708/dWsxDcst/TNO-2024-R10960.pdf},
```

2. citation to this report:

```
author      = {Wouters, D. A. J. and van Dooren, M. F. and Fritz, E. K.  
              and Bot, E. T. G. and Verhoef, J. P. and Bergman, G. and van der Werff, P.A.},  
institution = {TNO},  
title       = {Offshore wind resources at the North Sea},  
subtitle    = {Europlatform, 2016\textendash2024},  
number      = {TNO 2025 R11110},  
date        = {2025-05-27},
```

The publication date at which the data have last been accessed must be indicated along the citations, e.g. “Last accessed May 2025”.

The data are shared in .csv format. In the case of the EPL measurement campaign please adhere to the following information:

- › offshorewind-measurements.tno.nl/en/measurement-locations/europlatform-epl/
- › For monthly files use: EPL-yyyy-mm.csv.
- › After a quarter of a year is completed the monthly files will be replaced by EPL-yyyy-Qx.csv.
- › After a year is completed the quarterly files will be replaced by a yearly file EPL-yyyy.csv.

3 Measurement campaign at EPL

3.1 Location, lidar installation and operation

The Europlatform (EPL) is located about 60 km from the coast of Hoek van Holland, see figure 1.1. It includes a helicopter pad and an accommodation deck (see figure 3.2). The platform is part of the North Sea Monitoring Network consisting of several permanent monitoring locations over the North Sea.

Since its installation in 2016, TNO has been conducting an ongoing measurement campaign at EPL, and has accumulated meteorological data, knowledge about installation practices, maintenance, replacement, and observations of weather conditions that have occurred at the site. Figure 3.2 shows the lidar at its location on the platform.

On this platform, the Dutch national weather service (KNMI) and Rijkswaterstaat, (both part of the Dutch Ministry of Infrastructure and Water Management) coordinate activities for collection of meteorological information (including the air pressure, wind speed and direction, air temperature, relative humidity and visibility) and oceanographic data (water level, temperature and height) as well.

The current instrumentation at EPL is a ZX300M lidar. The instrument measures wind profiles at up to ten different heights by conically emitting a laser beam into the air, even if an object blocks the laser beam at some positions (see [11] for the lidar specifications). Before the lidar was installed at the EPL platform, it was calibrated, see latest calibration report [12]. At EPL, the lidar is installed at the west side of the platform on an extension built between the landing and the deck, see figure 3.2. The lidar provides both wind speed and direction measurements at ten different heights between 63 m and 291 m above MSL. To ensure good quality measurements it is crucial to select the right location for the lidar on the platform. More detailed information about the positioning and installation of the lidar on the EPL platform is available in the instrumentation report [13].

The lidar measurement height and data acquisition configuration is chosen to be the same as at other measurement locations, i.e. the LEG, K13-A and L2-FA-1 platforms. The lidar manufacturer guarantees adequate data quality up to 300 m.

As defined by TNO's ISO 17025 quality system, each lidar should be serviced after one year of operation and replaced every two years. These periodic lidar replacements are logged in table 3.1. All operational aspects with respect to installing and maintaining the lidar are recorded in a logbook by the team responsible for the measurement campaign. These occurrences during the year 2024 are summarised in table 3.2.

3.2 Health and safety measures

Health, safety and environment are main priorities at TNO. TNO follows a strict programme to train the employees for the measurement campaigns. Additional agreed safety measures with

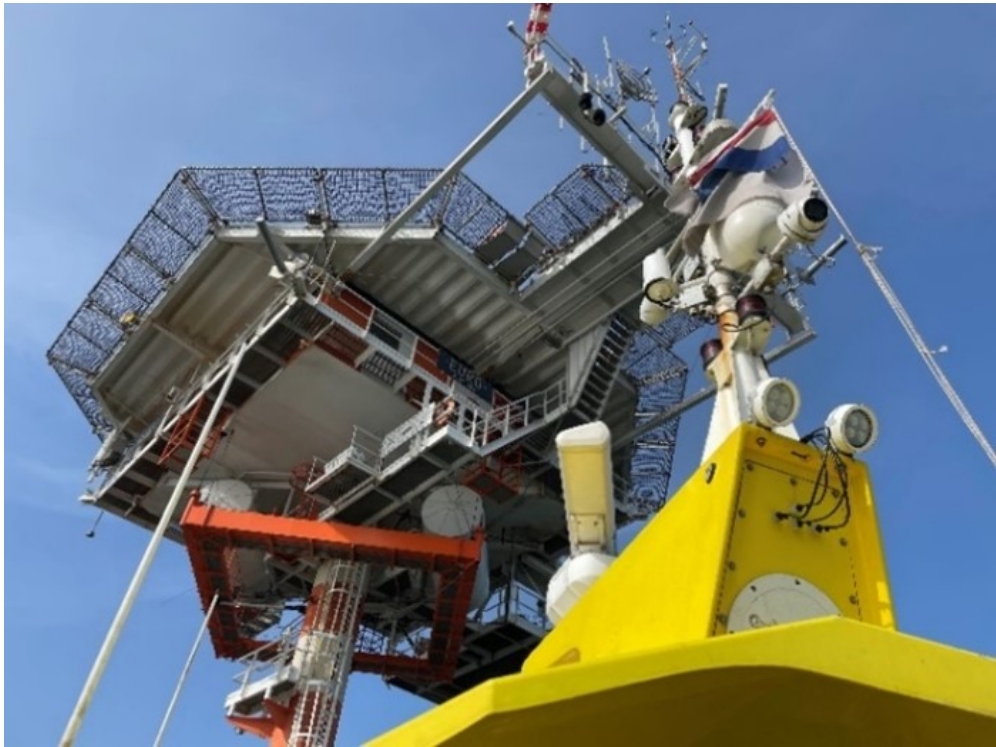


Figure 3.1: Europlatform



Figure 3.2: Lidar unit at EPL

Table 3.1: Replacements of lidars at the EPL platform

Lidar ID	Operational period	Reason for replacement
ZX308	10-05-2016 to 10-08-2018	First installation
ZX315	10-08-2018 to 23-10-2019	Power failure
ZX308	23-10-2019 to 22-03-2022	Periodic replacement
ZX315	22-03-2022 to 19-04-2024	Periodic replacement
ZX563	19-04-2024 to present	

Table 3.2: Down-time periods and actions taken at EPL platform during the year 2024

Date	Reason
19-04-2024	Replacement of lidar ZX315 with lidar ZX563
14-11-2024	Periodic maintenance performed on ZX563 and recorded in logbook. Replacement of glass window wiper. Compass measurement of platform orientation resulting in an offset of 8.3°, for which the data has been corrected retroactively.

Rijkswaterstaat for the safe installation of the frame and the lidar were:

- › A job-risk-assessment (AD-130, project RI&E) is made and signed by both parties involved.
- › Toolbox meetings among the teams to agree on the alignment of the preparation at the platform.
- › TNO employees have valid GWO certificates, proving that they know how to work safely. TNO employees working on the platform will wear fall-arrest systems, helmets and safety shoes.
- › TNO employees have valid HUET certificates (only in case of a helicopter visit).

3.3 Lidar performance assessment at EPL

Remote sensing devices bring many advantages such as ease of transportation and measurement capabilities beyond meteorological mast configurations. However, these devices are exposed to harsh environmental conditions offshore and therefore measurements can be impacted. The performance and quality of the data recorded by lidars during a measurement campaign can be impacted by defective or damaged sensors and cables, other system malfunctions, and also by severe meteorological events. All of these events can lower the data availability of the lidar. For this reason, the need for continuous quality assurance and control techniques is paramount during the measurement campaign. The heights considered are 63 m, 91 m, 116 m, 141 m, 166 m, 191 m, 216 m, 241 m, 266 m and 291 m, w.r.t. MSL.

An overview of the measured and recorded quantities by the lidar at EPL is shown in table 3.3. The data are measured on a 10-minute basis and timestamped at the start of each 10-minute interval. The data collection period started in 2016. This report considers the measurement period until 31 December 2024 at 23:50 UTC. The campaign is still ongoing, with future yearly assessments envisioned.

The annual lidar data availability at EPL is indicated in table 3.4. The data availability depends on the height of the measurements, and manufacturers will typically suggest usage of the lidar up to a certain height. On average, the data availability for heights up to 191 m is at least 75.8 %, while farther up to 241 m it decreases to 73.3 %, and finally to 69.1 % at the highest altitude of 291 m. For the year 2024, the data availability for heights up to 191 m is at least 91.5 %, and for the year 2025, the data availability for heights up to 191 m is at least 91.5 %.

Table 3.3: List of variables measured by the lidar. HXXX are the different measurement heights w.r.t. MSL: 63 m, 91 m, 116 m, 141 m, 166 m, 191 m, 216 m, 241 m, 266 m and 291 m

Acronym	Signal name	Units
EPL_batvoltage	battery voltage	V
EPL_temppcpu	CPU temperature inside the lidar	°C
EPL_humpod	relative humidity inside the lidar	%
EPL_bearing	lidar bearing	°
EPL_tilt	lidar tilt angle	°
EPL_pair	air pressure at lidar position	hPa
EPL_wsmet	wind speed measured by lidar meteo station	m/s
EPL_wdmet	wind direction measured by lidar meteo station	°
EPL_HXXX_npts	measuring points	-
EPL_HXXX_missed	missed points	-
EPL_HXXX_npackets	packets in fit	-
EPL_HXXX_Wd	wind direction	°
EPL_HXXX_Wshor_avg	horizontal wind speed average	m/s
EPL_HXXX_Wshor_std	horizontal wind speed standard deviation	m/s
EPL_HXXX_Wshor_min	horizontal wind speed minimum	m/s
EPL_HXXX_Wshor_max	horizontal wind speed maximum	m/s
EPL_HXXX_WsVer_avg	vertical wind speed average	m/s
EPL_HXXX_cs	CS	-
EPL_HXXX_BackScatter	back scatter	-

while farther up to 241 m it decreases to 86.6 %, and finally to 80.3 % at the highest altitude of 291 m. The decrease in data availability and coverage with increasing measurement height is typically caused by the optical scattering of the lidar's laser pulses as they travel through the air. The farther the laser pulse travels, the more scattering occurs, resulting in a lower intensity of the laser light reflected back to the lidar. In some situations, the concentration of aerosols in the air, which usually decreases with height, could play an additional role.

For a more detailed overview of the lidar availability, the monthly availability is plotted in figure 3.3. During the measurement campaign, data verification is performed at different levels with quality checks carried out on a daily basis, using daily plots. Lead engineers check the signals for deviations or failures to be able to react on a short notice. During these checks, no data filtering is applied on the data availability. As mentioned before, data availability refers to the number of valid data readings within an interval of 10 minutes.

There are complementary reports with data verification comparing with other measurements. In particular, a comparison against the Dutch Offshore Wind Atlas [14] examines the wind speed and direction measurement campaigns at eight offshore measurement locations distributed throughout the North Sea, including the EPL platform. The study focuses on comparing the wind shear and veer from 2012 to the first quarter of 2018 with the aim of better understanding the wind conditions at the North Sea.

Table 3.4: Annual lidar data availability. Availability > 85 % is highlighted in blue.

	63 m	91 m	116 m	141 m	166 m	191 m	216 m	241 m	266 m	291 m
2016	91.5	92.3	92.1	92.0	91.9	91.6	91.2	90.9	90.6	89.8
2017	48.6	48.7	48.7	48.5	48.4	48.1	47.9	47.7	47.5	47.1
2018	54.1	54.1	53.9	53.8	53.6	53.5	53.4	53.2	53.1	53.0
2019	48.4	48.4	48.4	48.3	48.1	47.7	47.3	46.8	45.9	44.9
2020	89.1	89.3	89.5	88.7	88.2	87.2	86.0	84.2	81.1	77.3
2021	88.4	87.8	87.5	86.4	85.6	84.1	82.5	80.2	75.8	71.5
2022	94.9	94.7	94.8	94.2	94.0	93.4	92.3	90.1	87.8	85.6
2023	94.3	94.9	94.9	93.6	92.6	91.3	90.0	87.2	84.2	80.5
2024	95.9	95.6	95.1	93.6	92.7	91.5	89.5	86.6	83.7	80.3
Overall	77.7	77.8	77.7	77.0	76.5	75.8	74.8	73.3	71.3	69.1

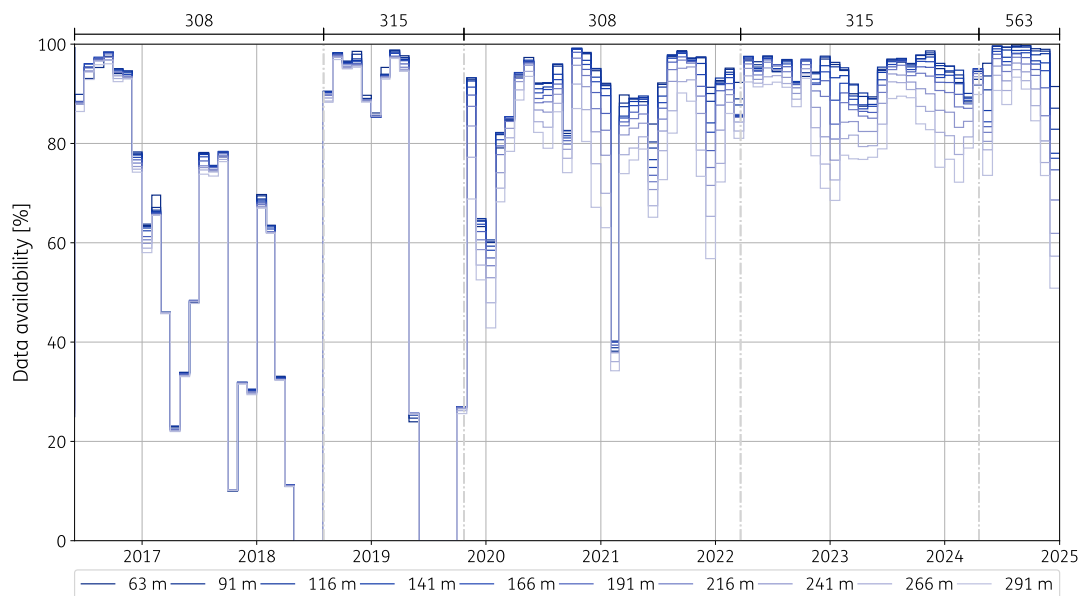


Figure 3.3: Monthly lidar data availability showing the lidar IDs and their operational periods.

4 Wind conditions at EPL

This section presents the results following an assessment of the weather conditions during the entire measurement campaign at EPL. The main meteorological characteristics are presented in the form of wind speed and wind direction distributions at various heights. Shear and veer are also assessed. The annual wind conditions are included in appendix A.

4.1 Distributions

For the presentation of the wind speed and wind direction distributions no filtering is applied besides the data rejection performed by the lidar itself.

The wind speed distribution is visualised by a kernel density estimate¹ (kde) in figure 4.2 along with its quartiles listed in table 4.1. Annual results are presented in section A.2. In order to mitigate seasonal bias as a result of incomplete years, the mean of monthly means (MoMM) is computed². A Weibull probability density function (pdf) is fitted to the wind speed frequency distribution³. The function is given by equation (4.1) and the resulting parameters are listed in table 4.2. Annual results are presented in section A.3. Figure 4.3 shows how well the resulting Weibull pdf matches the actual distribution (kde) for an example height⁴.

For the wind direction distribution the MoMM is computed too. The mean direction is computed as the average direction of the wind velocity⁵.

The wind speed and wind direction distributions can be visualised simultaneously in a wind rose, as shown in figure 4.1. Annual results are presented in section A.1.

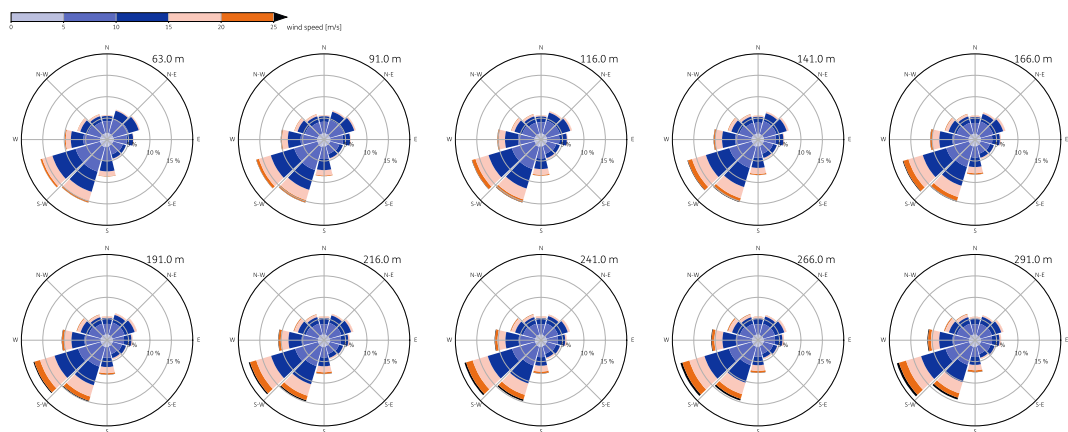


Figure 4.1: Wind roses for the complete measurement campaign

¹The kde uses a Gaussian kernel with a fixed 0.1 m/s bandwidth.

²First the data are categorised according to the 12 months of the year, for each month the mean is computed and finally the mean of the resulting values.

³The shape and scale parameters are obtained using maximum likelihood estimation.

⁴The measurement height closest to 141 m is chosen. This height is used as the hub height in section 4.3.

⁵The wind velocities are first averaged per month of the year. Then the 12 resulting vectors are averaged.

Table 4.1: Wind speed and wind direction statistics. The four quartiles of the wind speed distribution are listed, alongside the MoMM wind speed and wind direction. 'N' is the number of valid 10-minute average wind speed samples for each height.

Height m	N #	Wind speed					Wind direction
		Q ₁ m/s	median m/s	Q ₃ m/s	maximum m/s	MoMM m/s	MoMM °
63	351 125	5.78	8.67	11.94	33.05	9.07	237.8
91	351 346	5.91	8.93	12.40	33.92	9.38	237.2
116	350 866	5.98	9.08	12.67	34.63	9.58	237.2
141	347 882	6.04	9.21	12.90	35.46	9.76	237.5
166	345 687	6.09	9.31	13.09	36.05	9.90	237.9
191	342 349	6.13	9.39	13.25	36.86	10.03	238.4
216	337 936	6.19	9.45	13.40	37.86	10.15	238.8
241	331 093	6.23	9.52	13.52	38.94	10.25	239.3
266	322 068	6.25	9.56	13.61	40.37	10.34	239.7
291	311 959	6.21	9.50	13.60	41.12	10.34	240.4

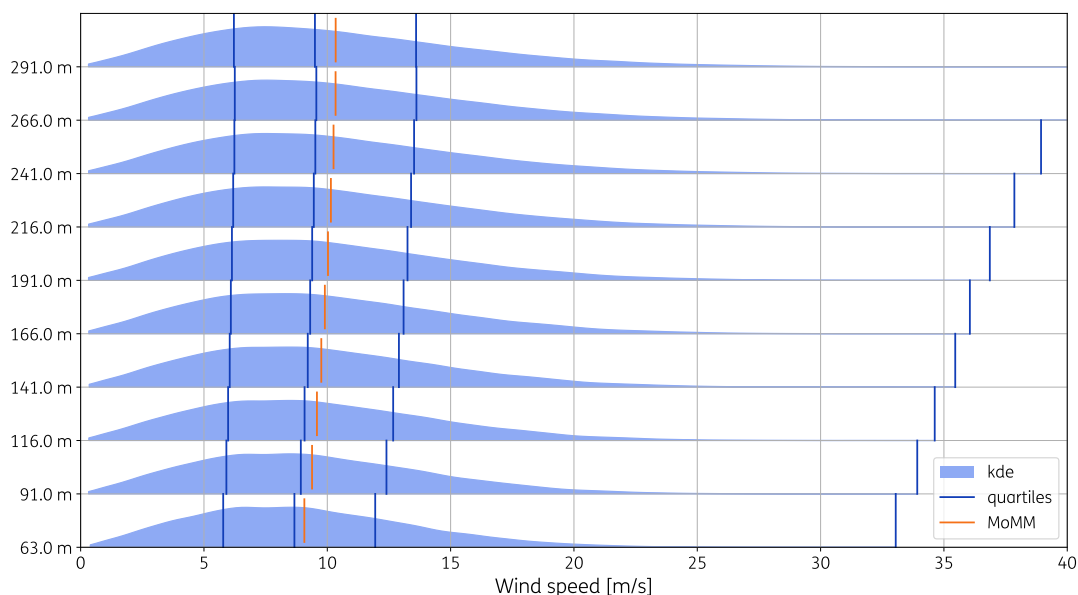
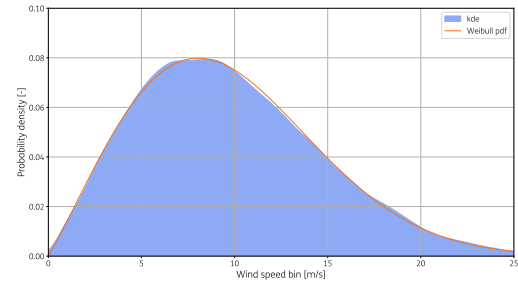


Figure 4.2: Wind speed distributions. The kde is shown with blue markers for the quartiles (Q₁, median, Q₃ and maximum) and an orange marker for the MoMM, as listed in table 4.1.

Table 4.2: Weibull parameters for the wind speed distributions at all heights

Height	Shape (k)	Scale (c)
m	–	m/s
63	2.163	10.28
91	2.133	10.62
116	2.106	10.84
141	2.081	11.03
166	2.058	11.19
191	2.038	11.33
216	2.023	11.45
241	2.010	11.56
266	1.996	11.64
291	1.977	11.63

**Figure 4.3:** Weibull pdf of wind speed distribution at 141 m

$$f(v; k, c) = \frac{k}{c} \left(\frac{v}{c}\right)^{k-1} \exp\left[-\left(\frac{v}{c}\right)^k\right] \quad (4.1)$$

where

- v wind speed (m/s), $v > 0$
- k shape parameter (dimensionless), $k > 1$
- c scale parameter (m/s), $c > 0$

4.2 Turbulence intensity

The turbulence intensity can be estimated from the wind speed data measured by a lidar⁶. The lidar provides an internally computed 10-minute average value for the turbulence intensity.

Figures 4.4 to 4.13 show the bin-wise mean turbulence intensity as a function of the wind speed for every measurement height. The error bars indicate the 95 % confidence interval. For the wind speed 1 m/s wide bins were used, centred on integer multiples of 1 m/s, ranging from 3 m/s to 25 m/s.

⁶The result will be different from the turbulence intensity measured by an anemometer, because a lidar cannot perform a point measurement of the horizontal wind speed.

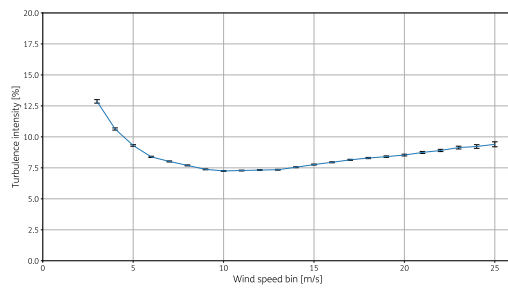


Figure 4.4: Turbulence intensity at 63 m

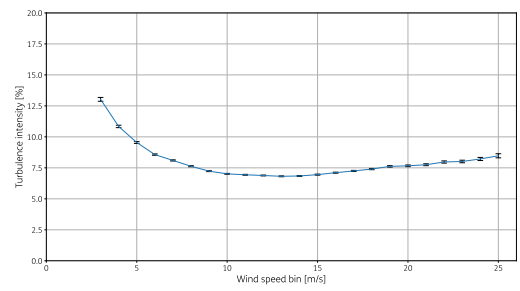


Figure 4.5: Turbulence intensity at 91 m

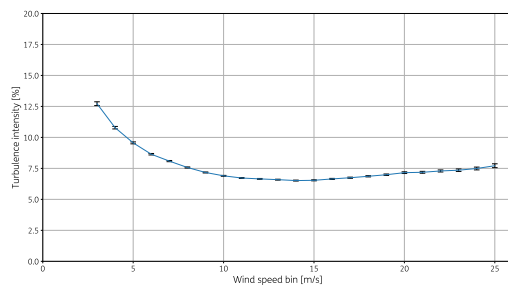


Figure 4.6: Turbulence intensity at 116 m

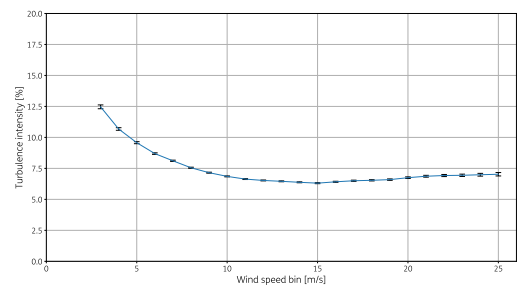


Figure 4.7: Turbulence intensity at 141 m

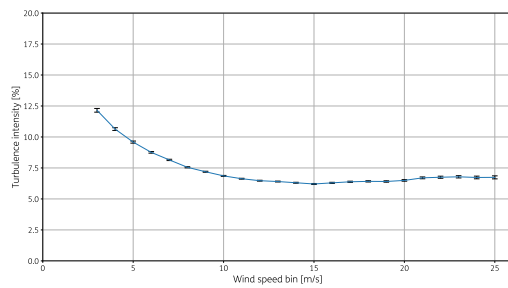


Figure 4.8: Turbulence intensity at 166 m

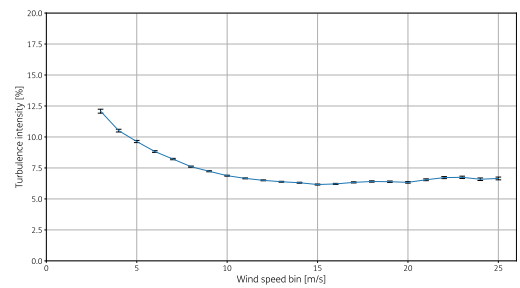


Figure 4.9: Turbulence intensity at 191 m

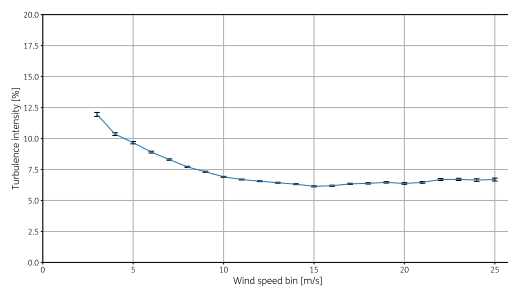


Figure 4.10: Turbulence intensity at 216 m

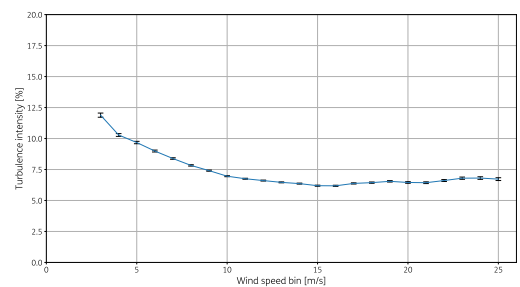


Figure 4.11: Turbulence intensity at 241 m

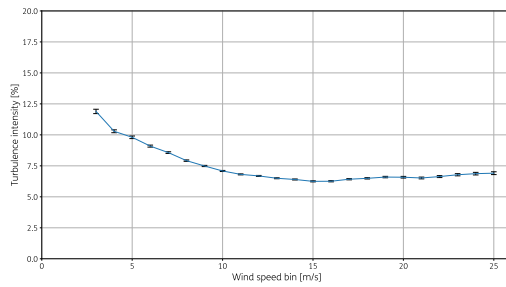


Figure 4.12: Turbulence intensity at 266 m

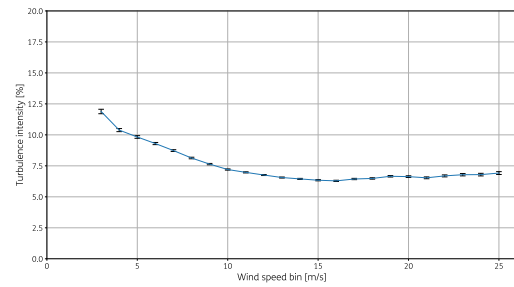


Figure 4.13: Turbulence intensity at 291 m

4.3 Wind shear and veer

When characterising the shear and veer, only the measurements across the swept area of a large offshore turbine rotor are included. For this purpose, a fictive wind turbine with a hub height of 150 m and a rotor radius of 110 m is assumed.

4.3.1 Data selection

Contrary to the unfiltered dataset used for the distributions in section 4.1, for the shear and veer analysis the following filters are applied in sequence.

1. Only the measurement heights in the range of 40 m to 260 m are considered. This range follows from our fictive wind turbine definition.
2. Wind speeds below 3 m/s are rejected⁷.
3. Incomplete wind speed and wind direction profiles are rejected, i.e., all wind speed and wind direction measurements must be valid across the selected height range.
4. Wind direction profiles with a range in excess of 90° are rejected⁸.

Figure 4.14 shows the MoMM values for the wind speed and wind direction for each height after application of these filters. The plot showing the average wind speed per height can be interpreted as an average wind shear profile. The plot showing the average wind direction per height is not representing an average veer profile, because the average wind direction is computed by vector averaging and thus weighted by the wind speed.

4.3.2 Modelling

The wind shear is modelled by the power law in equation (4.2). The wind veer is modelled by a linear profile fitted through the unit-vector averaged wind direction over height. These are typically reasonable representations of the 10-minute average wind profile.

$$v_z = v_H \left(\frac{z}{H} \right)^\alpha \quad (4.2)$$

⁷This threshold is based on the MEASNET procedure [15, clause 9.4].

⁸This is most commonly the result of a partially inverted profile due to the homodyne detection ambiguity in continuous-wave lidar measurements.

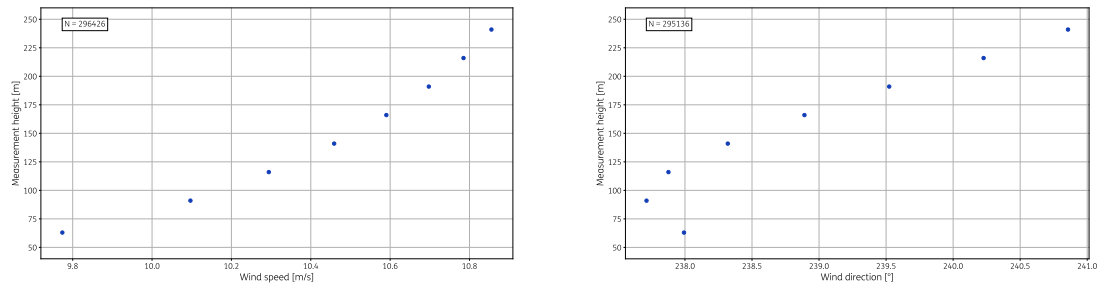


Figure 4.14: Average wind speed and wind direction (MoMM) of the dataset per height. 'N' is the number of 10-minute average samples remaining after filtering used to compute the MoMM values.

where

- v_z wind speed at height z (m/s)
- v_H wind speed at reference height H (m/s)
- z height (m)
- H reference height, e.g. hub height (m)
- α shear exponent (dimensionless)

The shear and veer are computed for each 10-minute average interval. Then the method of bins is applied to compute the mean values for the shear exponent and the veer rate, as well as the 95 % confidence interval.

Figures 4.16 to 4.19 show the shear and veer as a function of month of the year, hour of day, wind speed and wind direction. For the wind speed 1 m/s wide bins were used⁹, centred on integer multiples of 1 m/s, ranging from 3 m/s to 25 m/s. For the wind direction 15° wide bins were used, centred on integer multiples of 15°. Figure 4.15 shows shear and veer as a function of wind speed and wind direction. For these plots a bin count threshold of six samples (i.e. one hour of data) was used. Annual results are presented in section A.4.

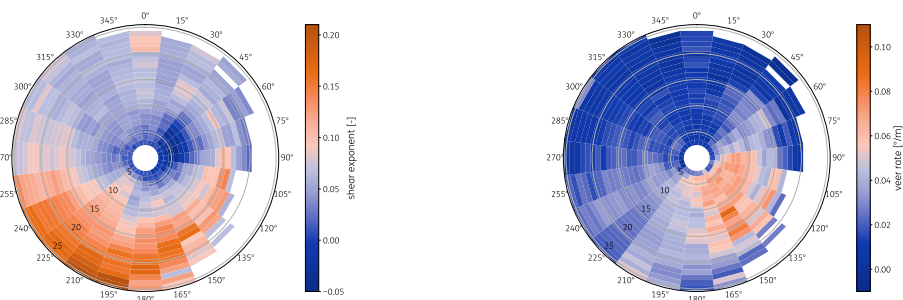


Figure 4.15: Wind shear and veer as function of wind speed and direction. The azimuth indicates the wind direction bin, the radius labels indicate the wind speed bin and the colour represents the mean value for the shear exponent (left) and veer rate (right).

⁹This follows the MEASNET procedure [15, clause 9.4].

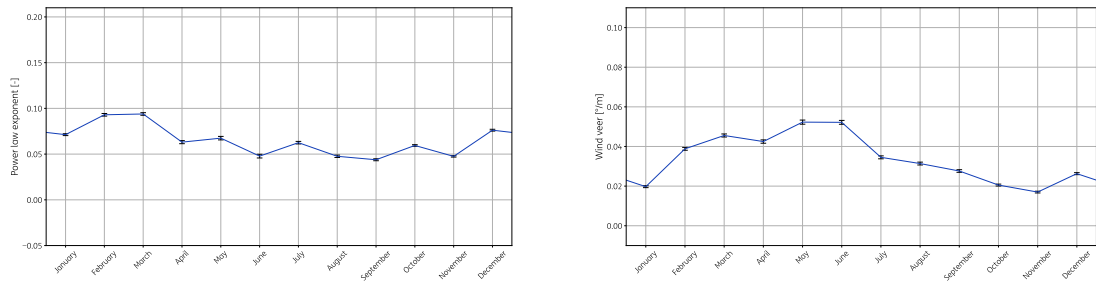


Figure 4.16: Wind shear and veer as function of the month-of-year

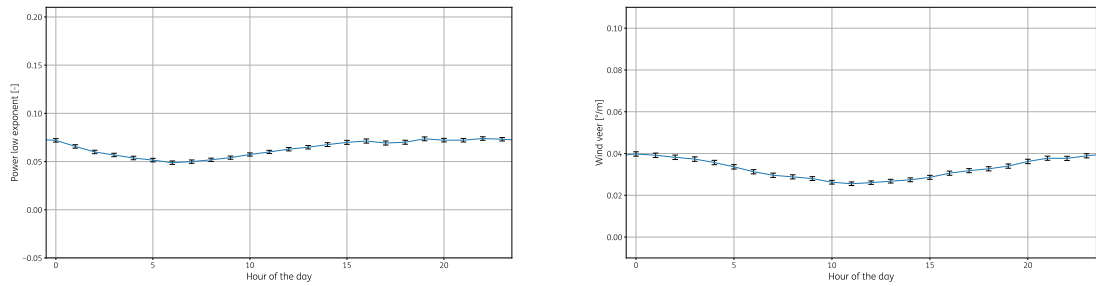


Figure 4.17: Wind shear and veer as function the hour-of-day

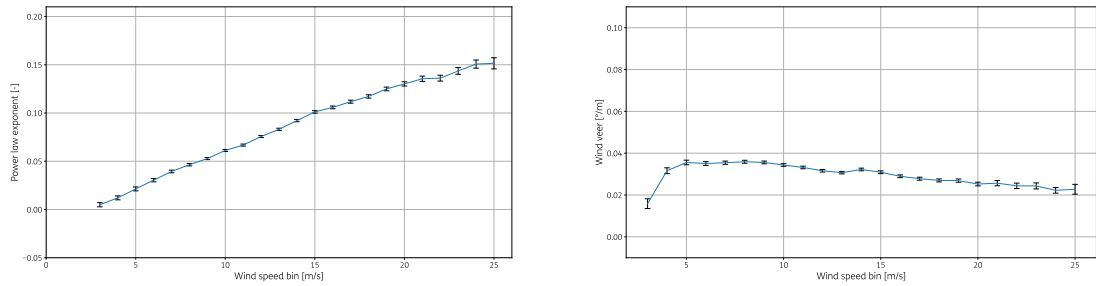


Figure 4.18: Wind shear and veer as function of wind speed

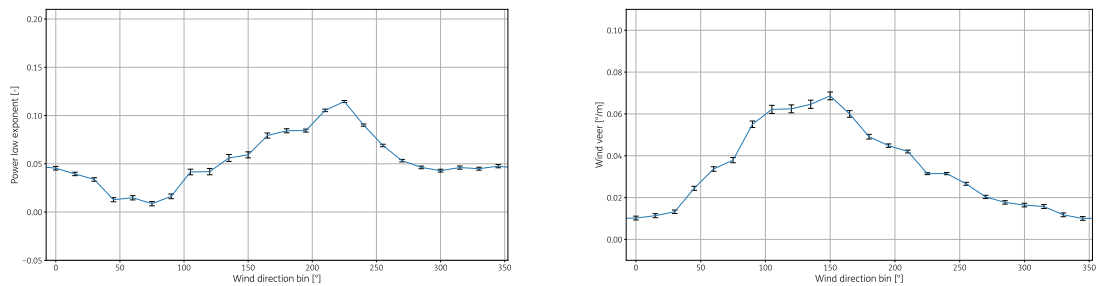


Figure 4.19: Wind shear and veer as function of wind direction

5 Conclusions and recommendations

This report refers to the measurement campaign at the EPL platform where a ZX300M lidar has been deployed, providing high quality data since 2016. The data are publicly available to be used for further purposes (offshorewind-measurements.tno.nl).

For the year 2024, the data availability for heights up to 191 m is at least 91.5 %, while farther up to 241 m it decreases to 86.6 %, and finally to 80.3 % at the highest altitude of 291 m.

At the EPL platform, the wind analysis for the 2016–2024 period shows that the wind profiles are dominated by the regional climate, mainly caused by the positive phase effect of North Atlantic Oscillation (NAO). The prevailing wind direction is from the south-west with a mean direction ranging from 237.2° to 240.4° across the different sensor heights (63 m to 291 m). The average wind speed ranges from 9.07 m/s at the lowest measurement height of 63 m up to 10.34 m/s at 291 m. The Weibull distribution, indicating the variability of the wind regime throughout the measurement period, shows a wind speed distribution with typical offshore scale (k) and shape (c) parameters ($k = 2.08$ and $c = 11.03$ m/s at 141 m height).

Measurement campaigns play a crucial role for feasibility studies of offshore wind sites as well as plant valuation. They are the basis for the financial decision to ensure the profitability of a wind farm. In addition, the measured data can be used for other applications in the energy sector, such as:

- › developing offshore wind atlases and models by using long-term and accurate wind datasets as reference points.
- › serving as a basis for the development and validation of high fidelity models. It is necessary to improve the accuracy over a wide range of site conditions, with sufficient resolution in both time and space.
- › improving and reducing uncertainties of the variability due to renewable resources and their increase penetration in the power sector. The adequate modelling of such power systems crucially depends on the accurate representation of the spatial and temporal characterisation of the weather conditions. Variability and uncertainty of the wind resource is translated into datasets that inherently bear the risk of being imperfect, inappropriate or incomplete. This might lead to errors in power system studies which in turn could result in either overstating or downplaying the possible role of wind energy in the future energy mix.
- › capturing extreme weather events for developers and wind turbine manufactures to help develop, certify and validate new models under site specific conditions.
- › studying periodical trends and occurrences in the data.

The present report does not tackle such applications as its aim is to solely present the measurement data from the EPL platform. TNO does, however, publish an additional annual report sketching a broader picture of the North Sea's wind climate, the most recent one being last year's (2023) report [16]. These annual reports provide a more in-depth analysis of the data and (partially) tackle the above-mentioned applications, based on data measured at the LEG, EPL, K13-A and L2-FA-1 platforms. The 2024 version of this overarching report will be released later this year.

Acknowledgements

The measurement campaign at the offshore platform EPL is carried out on the authority of the Ministry of Climate Policy and Green Growth of The Netherlands.

References

- [1] *New offshore wind farms*. Netherlands Enterprise Agency (RVO). Nov. 26, 2024.
- [2] R. A. A. Jetten. *Letter to Parliament on offshore wind energy 2030-2050*. English. Dutch Ministry of Economic Affairs and Climate (EZK). Sept. 16, 2022.
- [3] *Windparken op zee: Nederland ruim op schema, begin 2024 start tenderronde voor verdubbeling*. Dutch Ministry of Economic Affairs and Climate (EZK). Dec. 20, 2023.
- [4] *Nederwiek - General Information*. Dutch Ministry of Economic Affairs and Climate (EZK). Apr. 14, 2025.
- [5] **IEC 61400-50-2:2022-08**. *Wind energy generation systems – Part 50-2: Wind measurement – Application of ground-mounted remote sensing technology*. Aug. 2022.
- [6] I. Gonzalez-Aparicio, J. P. Verhoef, and G. Bergman. *Offshore wind energy deployment in the North Sea by 2030: long-term measurement campaign Europlatform, 2016-2019*. **TNO 2020 R10551**. TNO, July 6, 2020.
- [7] I. Gonzalez-Aparicio et al. *Offshore wind energy deployment in the North Sea by 2030: long-term measurement campaign*. EPL, 2016–2020. **TNO 2021 R10919**. TNO, July 1, 2021.
- [8] A. Pian et al. *Offshore wind energy deployment in the North Sea by 2030: long-term measurement campaign*. EPL, 2016–2021. **TNO 2022 R10909**. TNO, July 18, 2022.
- [9] J. A. Vitulli et al. *Offshore wind energy deployment in the North Sea by 2030: long-term measurement campaign*. EPL, 2016–2022. **TNO 2023 R10578**. TNO, June 27, 2023.
- [10] D. A. J. Wouters et al. *Offshore wind resources at the North Sea*. Europlatform, 2016–2023. **TNO 2024 R11675**. TNO, Dec. 16, 2024.
- [11] *ZX300M Offshore Wind Lidar for Floating Devices*. ZX Lidars. 2025.
- [12] C. Liu and G. Bergman. *Verification of the Wind@Sea lidar system ZX563 at the EWTW test site near meteorological mast MM6*. **TNO 2024 R10316**. TNO, Mar. 1, 2024.
- [13] G. Bergman and J. P. Verhoef. *Europlatform lidar measurement campaign. Instrumentation Report 2024*. **TNO 2024 R10960**. TNO, June 28, 2024.
- [14] G. A. Venkitachalam. *High Altitude Wind Resource Assessment. A study of the North Sea wind conditions using the Dutch Offshore Wind Atlas*. TNO, 2020.
- [15] *Evaluation of site-specific wind conditions*. Version 3. MEASNET, Sept. 2022.
- [16] E. T. G. Bot, C. B. H. Eeckels, J. P. Verhoef, and D. A. J. Wouters. *Offshore wind resource in the Dutch North Sea. Longterm measurement campaign and understanding wind conditions, 2023*. **TNO 2024 R11678**. TNO, Dec. 16, 2024.

Appendix A

Annual wind conditions during the campaign at EPL

A.1 Wind rose

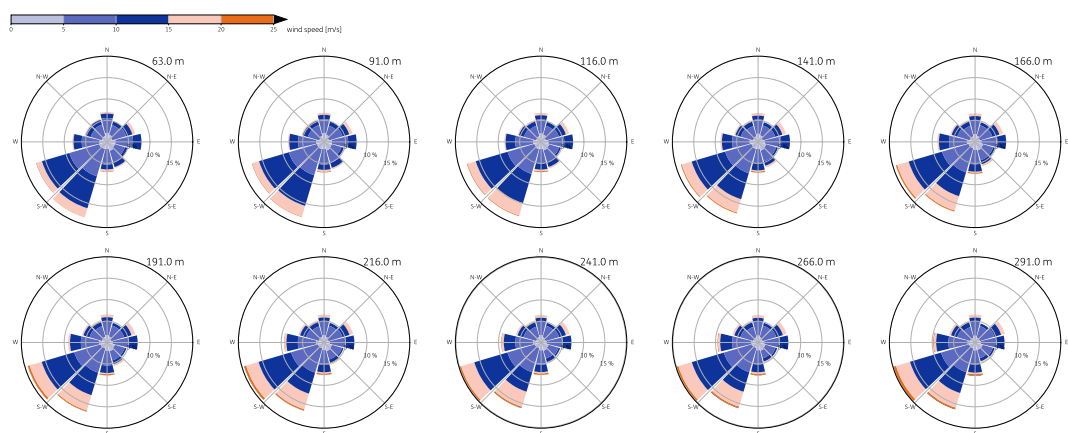


Figure A.1: Wind roses for 2016

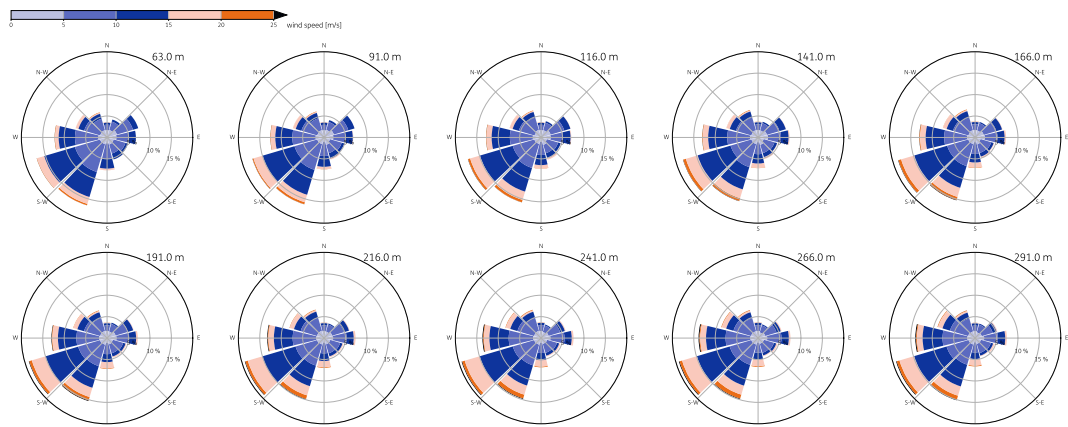


Figure A.2: Wind roses for 2017

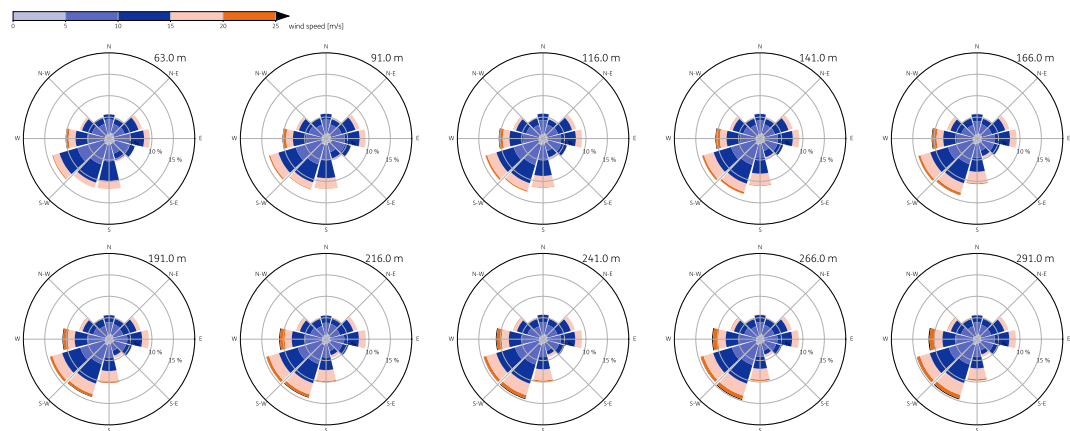


Figure A.3: Wind roses for 2018

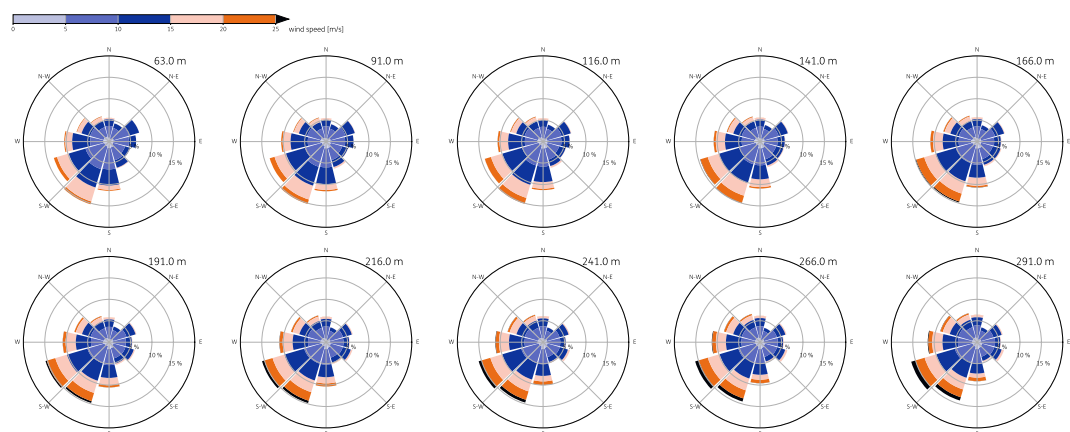


Figure A.4: Wind roses for 2019

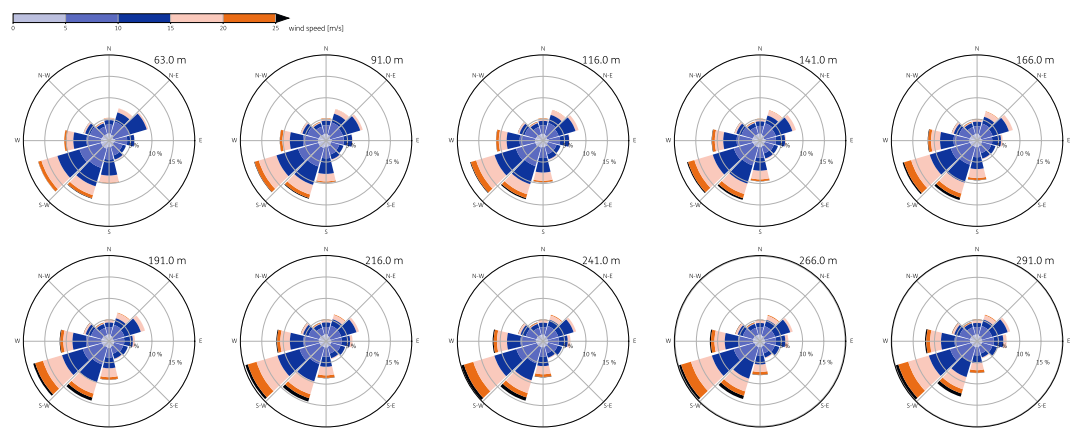


Figure A.5: Wind roses for 2020

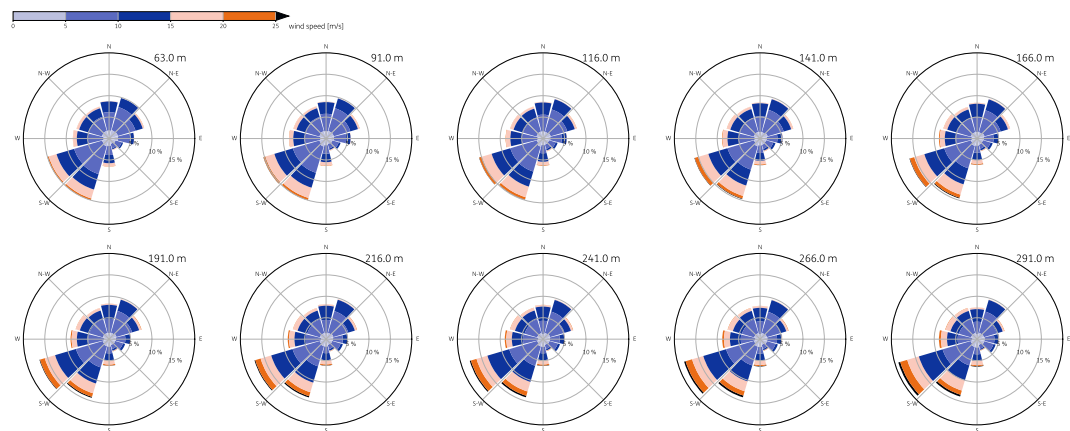


Figure A.6: Wind roses for 2021

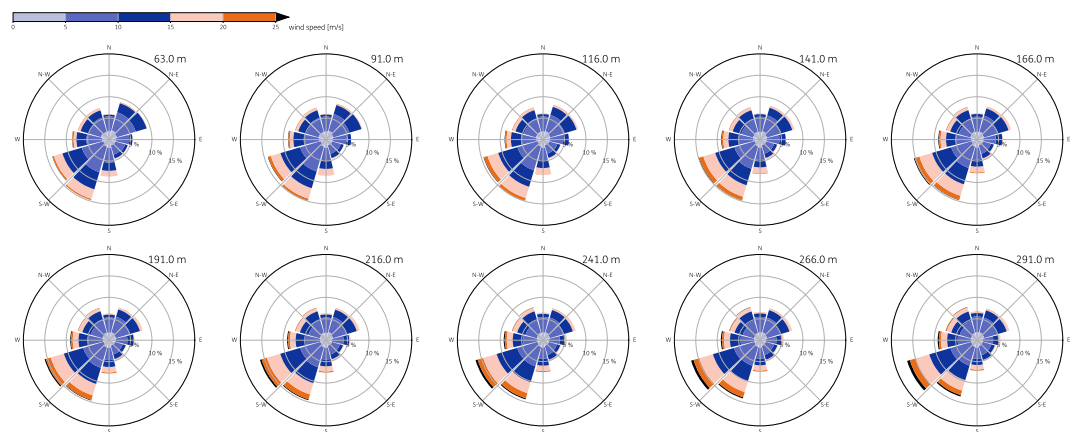


Figure A.7: Wind roses for 2022

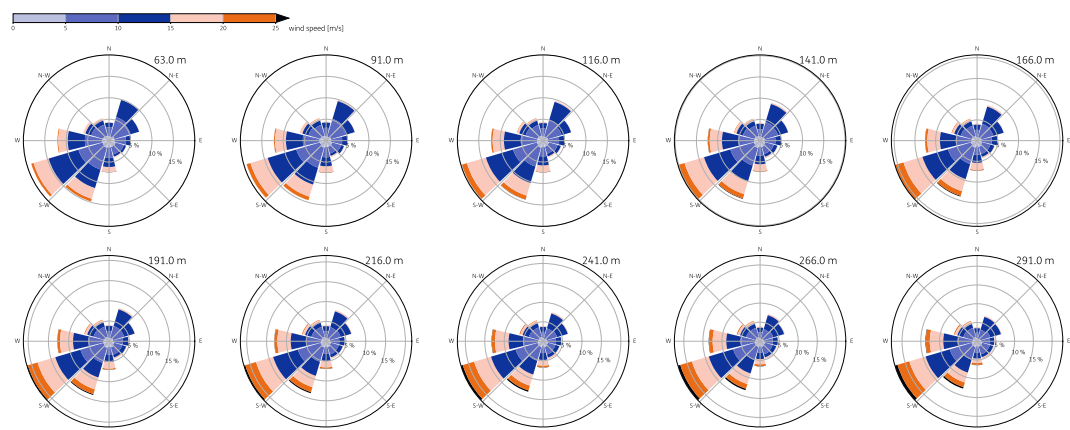


Figure A.8: Wind roses for 2023

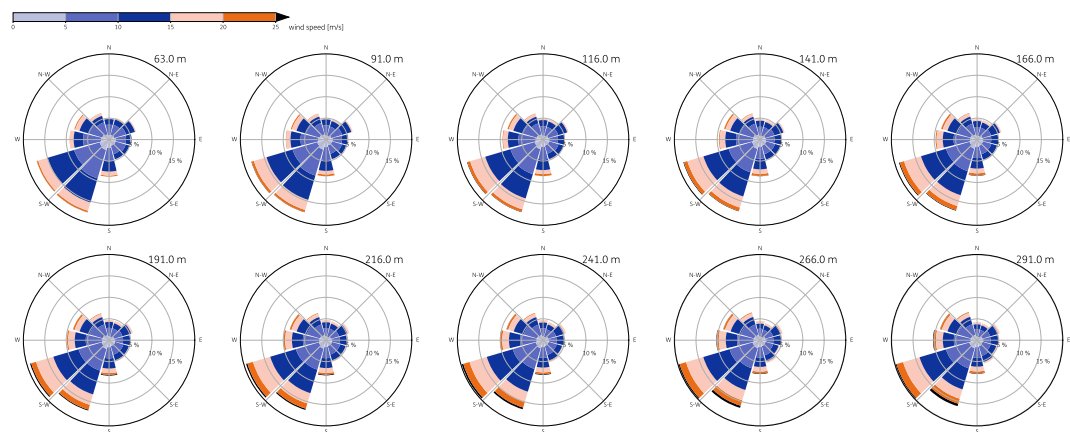


Figure A.9: Wind roses for 2024

A.2 Wind speed and direction statistics

Table A.1: Wind speed and wind direction statistics for 2016

Height m	Wind speed						Wind direction
	N #	Q ₁ m/s	median m/s	Q ₃ m/s	maximum m/s	MoMM m/s	MoMM °
63	28 315	5.47	8.23	11.05	30.48	8.68	254.8
91	28 591	5.52	8.35	11.40	31.23	9.12	260.3
116	28 504	5.58	8.43	11.60	32.34	9.43	263.7
141	28 485	5.63	8.49	11.73	31.85	9.61	265.3
166	28 449	5.69	8.52	11.85	31.81	9.72	265.8
191	28 355	5.72	8.56	11.93	31.90	9.79	265.5
216	28 237	5.75	8.59	11.97	32.48	9.83	265.7
241	28 134	5.80	8.61	12.00	32.03	9.90	266.5
266	28 057	5.83	8.62	12.03	32.64	9.94	266.7
291	27 802	5.89	8.64	12.08	33.03	9.97	266.2

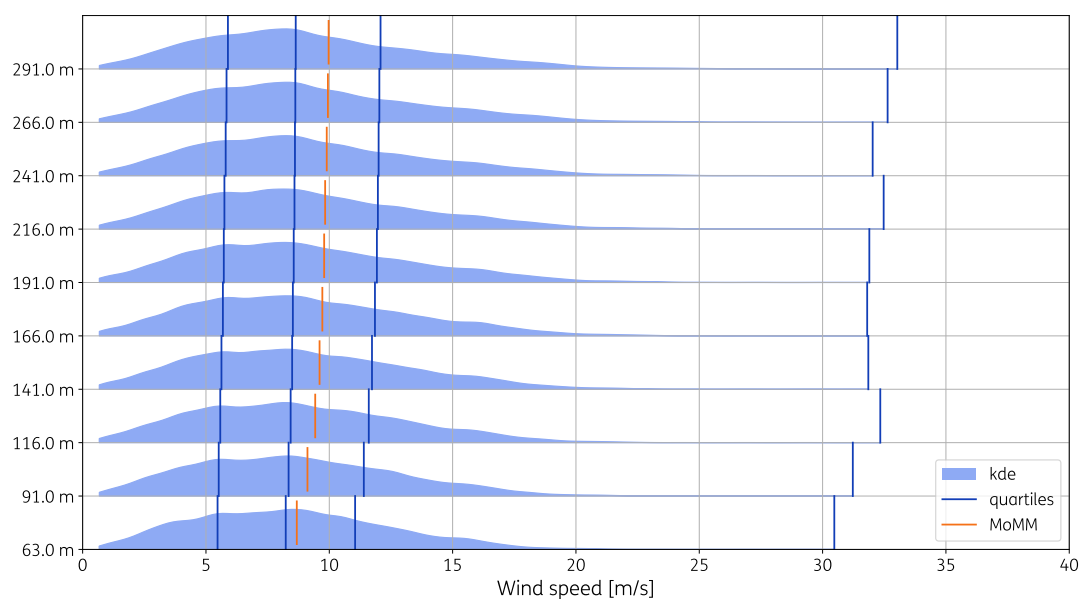


Figure A.10: Wind speed distributions for 2016

Table A.2: Wind speed and wind direction statistics for 2017

Height	Wind speed						Wind direction
	N	Q ₁	median	Q ₃	maximum	MoMM	MoMM
m	#	m/s	m/s	m/s	m/s	m/s	°
63	25 560	5.45	8.22	11.37	27.03	8.94	237.1
91	25 619	5.52	8.45	11.92	27.63	9.24	236.5
116	25 581	5.56	8.57	12.24	29.24	9.43	237.1
141	25 506	5.58	8.66	12.45	29.52	9.57	238.0
166	25 437	5.60	8.70	12.60	29.70	9.68	238.9
191	25 294	5.64	8.74	12.69	31.37	9.77	239.6
216	25 156	5.70	8.78	12.78	32.01	9.84	240.7
241	25 063	5.75	8.79	12.82	32.13	9.89	241.8
266	24 946	5.80	8.82	12.86	32.08	9.94	242.5
291	24 766	5.87	8.85	12.88	32.28	9.98	242.7

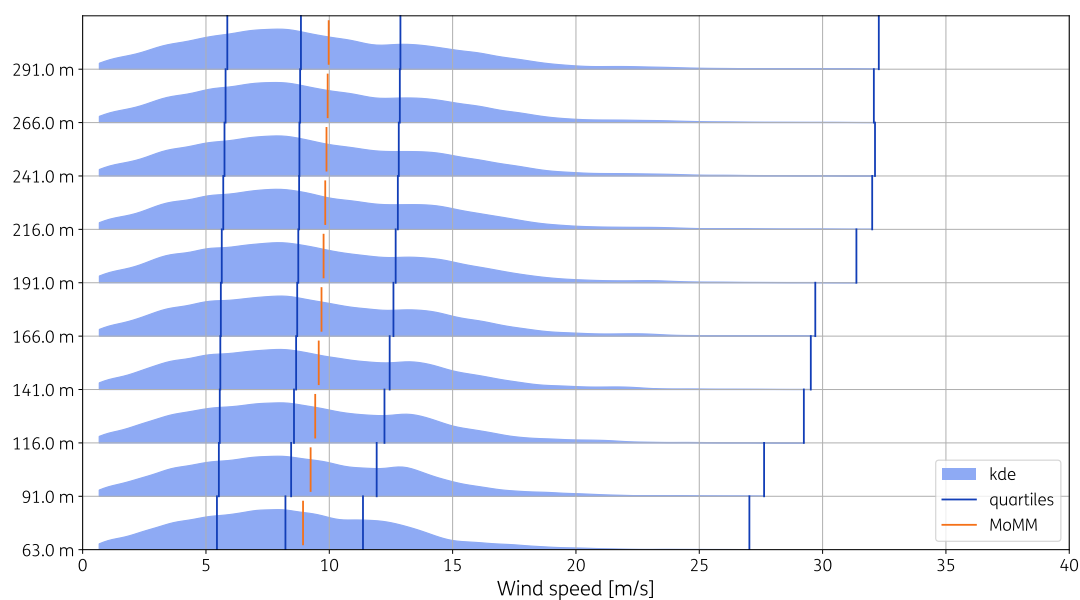


Figure A.11: Wind speed distributions for 2017

Table A.3: Wind speed and wind direction statistics for 2018

Height	Wind speed						Wind direction
	N	Q ₁	median	Q ₃	maximum	MoMM	MoMM
m	#	m/s	m/s	m/s	m/s	m/s	°
63	28 411	6.51	9.26	12.41	31.99	9.67	186.0
91	28 422	6.64	9.46	12.76	32.76	9.97	188.7
116	28 333	6.73	9.60	12.95	33.20	10.15	191.6
141	28 283	6.79	9.69	13.09	33.37	10.28	194.1
166	28 190	6.84	9.77	13.22	33.73	10.40	197.1
191	28 127	6.87	9.84	13.33	34.29	10.51	199.5
216	28 044	6.93	9.90	13.43	34.79	10.60	201.7
241	27 973	6.95	9.93	13.52	35.27	10.66	203.9
266	27 897	6.98	9.94	13.58	35.50	10.70	205.7
291	27 831	6.99	9.94	13.62	35.99	10.73	207.3

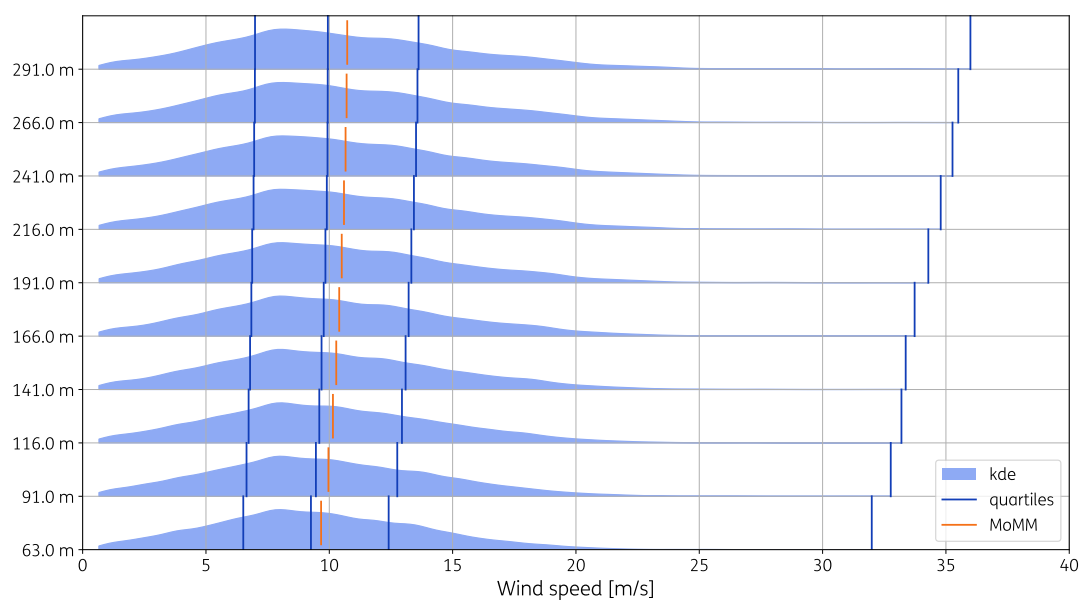


Figure A.12: Wind speed distributions for 2018

Table A.4: Wind speed and wind direction statistics for 2019

Height	Wind speed						Wind direction
	N	Q ₁	median	Q ₃	maximum	MoMM	MoMM
m	#	m/s	m/s	m/s	m/s	m/s	°
63	25 422	6.62	9.30	12.55	26.89	9.69	230.9
91	25 439	6.73	9.55	13.04	27.67	9.97	230.3
116	25 457	6.77	9.68	13.40	28.06	10.15	230.9
141	25 379	6.81	9.78	13.67	28.33	10.30	231.7
166	25 276	6.86	9.87	13.90	28.76	10.45	233.0
191	25 086	6.91	9.94	14.07	31.59	10.58	234.1
216	24 885	6.93	9.96	14.26	34.07	10.69	235.1
241	24 576	6.95	10.00	14.39	34.62	10.79	236.1
266	24 140	6.93	10.00	14.47	34.94	10.85	237.2
291	23 598	6.87	9.94	14.50	35.00	10.85	239.0

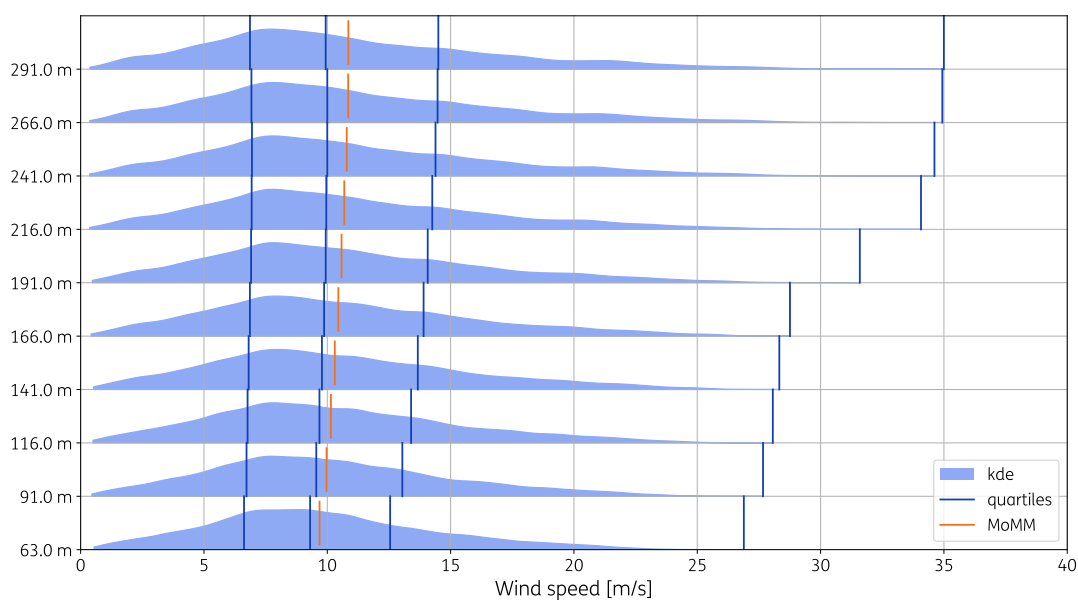


Figure A.13: Wind speed distributions for 2019

Table A.5: Wind speed and wind direction statistics for 2020

Height	Wind speed						Wind direction
	N	Q ₁	median	Q ₃	maximum	MoMM	MoMM
m	#	m/s	m/s	m/s	m/s	m/s	°
63	46 938	5.91	9.28	12.78	28.99	9.77	230.1
91	47 089	6.05	9.54	13.27	30.89	10.08	229.5
116	47 160	6.13	9.68	13.58	31.85	10.28	229.5
141	46 764	6.19	9.81	13.87	33.23	10.47	230.1
166	46 465	6.21	9.91	14.10	34.13	10.63	230.4
191	45 965	6.24	10.02	14.29	36.28	10.78	230.9
216	45 335	6.28	10.11	14.47	37.66	10.92	231.5
241	44 352	6.31	10.17	14.60	38.94	11.05	232.3
266	42 732	6.31	10.23	14.73	40.37	11.17	233.0
291	40 764	6.25	10.15	14.73	41.12	11.17	234.5

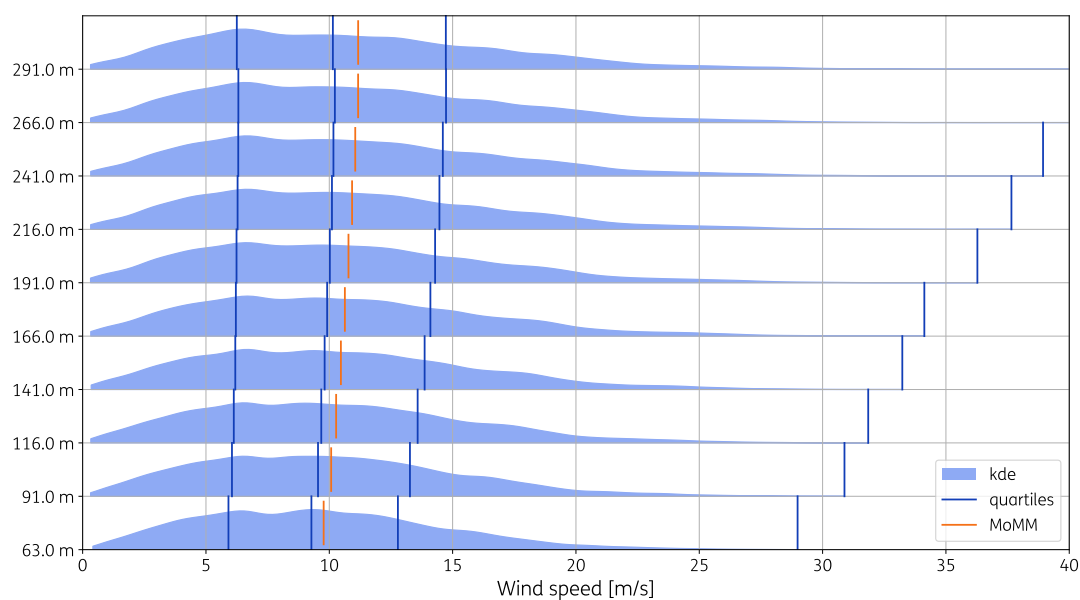


Figure A.14: Wind speed distributions for 2020

Table A.6: Wind speed and wind direction statistics for 2021

Height	Wind speed						Wind direction
	N	Q ₁	median	Q ₃	maximum	MoMM	MoMM
m	#	m/s	m/s	m/s	m/s	m/s	°
63	46 471	5.47	8.11	11.10	26.98	8.57	260.5
91	46 160	5.61	8.37	11.43	28.06	8.84	259.6
116	46 005	5.70	8.51	11.65	29.03	9.03	258.5
141	45 425	5.77	8.64	11.84	29.75	9.20	257.8
166	44 976	5.81	8.75	12.02	30.60	9.34	257.3
191	44 205	5.82	8.84	12.18	31.48	9.47	256.9
216	43 359	5.86	8.92	12.31	32.13	9.59	255.8
241	42 128	5.90	9.00	12.45	32.81	9.72	255.6
266	39 830	5.89	9.04	12.60	33.28	9.84	254.1
291	37 603	5.80	8.94	12.59	33.57	9.86	252.8

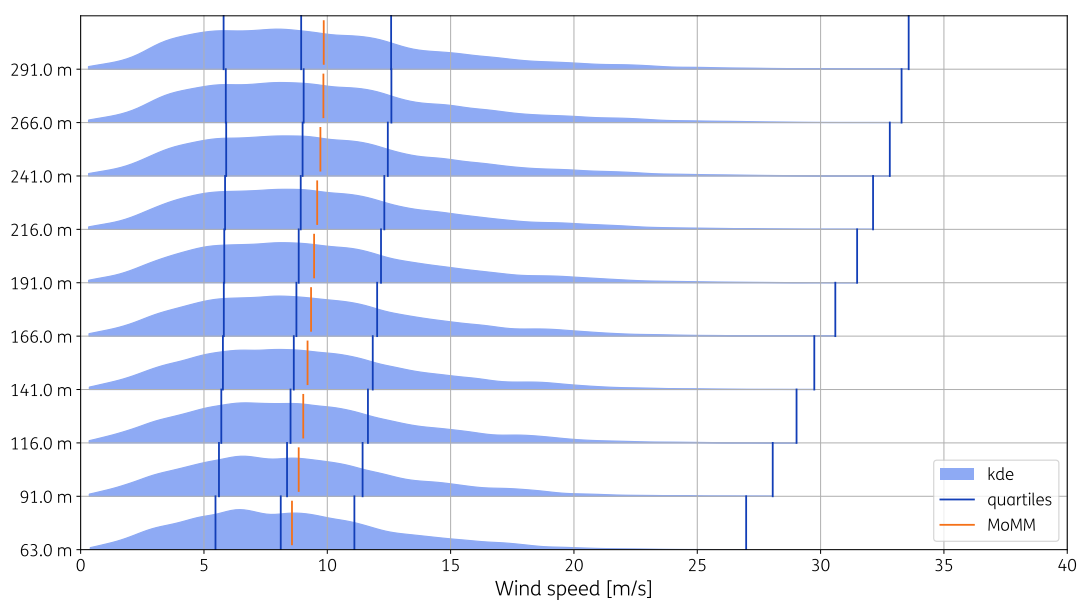


Figure A.15: Wind speed distributions for 2021

Table A.7: Wind speed and wind direction statistics for 2022

Height	Wind speed						Wind direction
	N	Q ₁	median	Q ₃	maximum	MoMM	MoMM
m	#	m/s	m/s	m/s	m/s	m/s	°
63	49 889	5.42	8.05	11.42	32.52	8.72	242.2
91	49 762	5.53	8.34	11.93	33.92	9.07	241.5
116	49 835	5.59	8.51	12.23	34.63	9.27	241.4
141	49 520	5.63	8.67	12.46	35.46	9.45	241.4
166	49 382	5.66	8.76	12.64	36.05	9.59	241.5
191	49 106	5.70	8.85	12.80	36.86	9.72	241.6
216	48 492	5.74	8.92	12.99	37.86	9.84	242.2
241	47 381	5.79	8.97	13.15	38.32	9.97	242.9
266	46 136	5.80	9.02	13.26	38.75	10.07	243.7
291	44 999	5.78	8.99	13.21	38.99	10.09	245.3

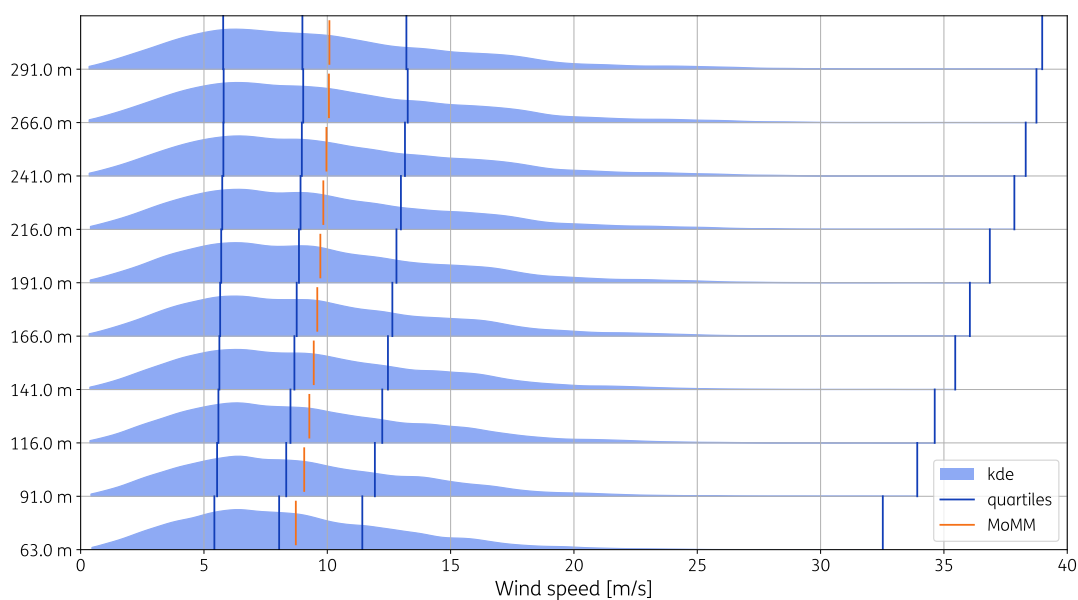


Figure A.16: Wind speed distributions for 2022

Table A.8: Wind speed and wind direction statistics for 2023

Height	Wind speed						Wind direction
	N	Q ₁	median	Q ₃	maximum	MoMM	MoMM
m	#	m/s	m/s	m/s	m/s	m/s	°
63	49 571	5.96	9.07	12.61	33.05	9.48	243.4
91	49 859	6.13	9.38	13.05	33.91	9.81	243.1
116	49 865	6.24	9.57	13.33	34.17	10.04	242.7
141	49 205	6.33	9.75	13.61	33.78	10.25	242.5
166	48 651	6.41	9.91	13.85	34.05	10.44	242.4
191	47 995	6.49	10.05	14.03	34.48	10.62	242.5
216	47 281	6.57	10.16	14.21	35.12	10.77	242.6
241	45 823	6.63	10.29	14.39	35.41	10.93	242.5
266	44 236	6.62	10.36	14.50	35.47	11.04	242.5
291	42 300	6.57	10.28	14.50	35.81	11.07	243.2

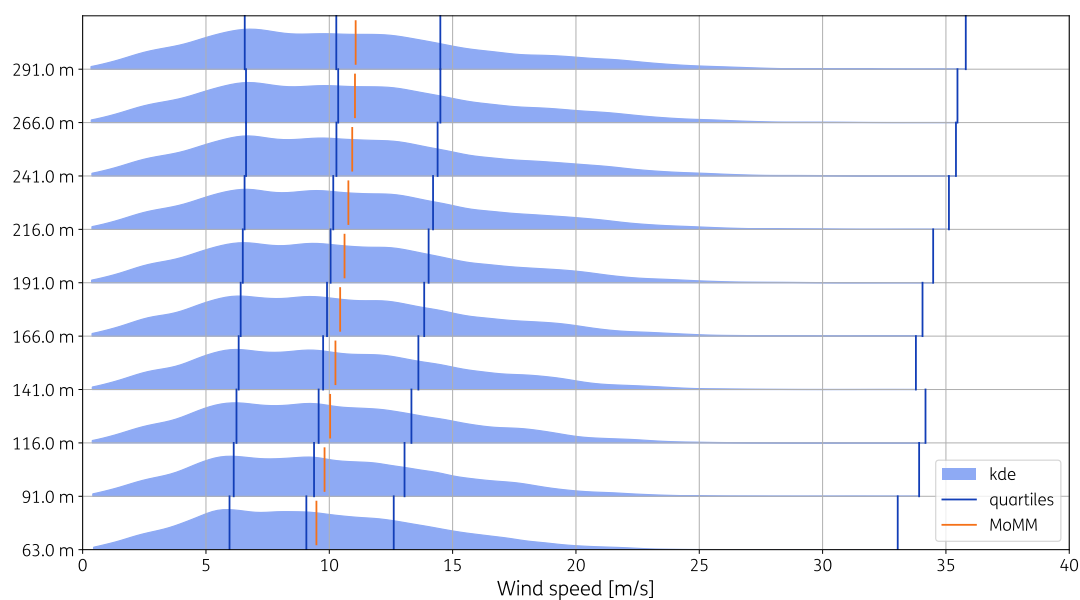


Figure A.17: Wind speed distributions for 2023

Table A.9: Wind speed and wind direction statistics for 2024

Height	Wind speed						Wind direction
	N	Q ₁	median	Q ₃	maximum	MoMM	MoMM
m	#	m/s	m/s	m/s	m/s	m/s	°
63	50 548	5.80	8.75	12.00	30.42	9.15	237.5
91	50 405	5.97	9.09	12.47	31.87	9.50	237.0
116	50 126	6.06	9.27	12.77	32.82	9.72	236.7
141	49 315	6.15	9.46	13.05	33.49	9.94	236.7
166	48 861	6.21	9.60	13.26	33.76	10.10	236.9
191	48 216	6.26	9.71	13.46	34.11	10.26	237.6
216	47 147	6.33	9.81	13.65	34.26	10.44	238.2
241	45 663	6.40	9.88	13.79	34.81	10.59	238.7
266	44 094	6.43	9.91	13.90	35.91	10.71	239.2
291	42 296	6.36	9.82	13.81	36.25	10.70	239.7

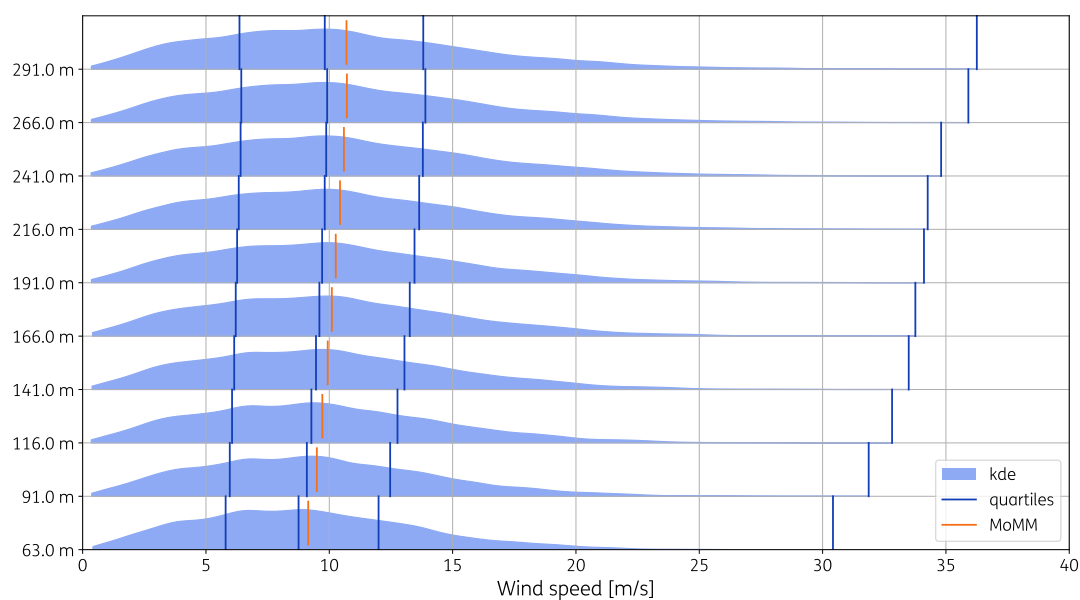


Figure A.18: Wind speed distributions for 2024

A.3 Wind speed distribution

Table A.10: Weibull parameters for 2016

Height	Shape (k)	Scale (c)
m	–	m/s
63	2.289	9.56
91	2.251	9.77
116	2.224	9.94
141	2.201	10.06
166	2.179	10.16
191	2.164	10.26
216	2.152	10.32
241	2.148	10.38
266	2.145	10.43
291	2.143	10.47

Table A.11: Weibull parameters for 2017

Height	Shape (k)	Scale (c)
m	–	m/s
63	2.177	9.65
91	2.134	9.99
116	2.096	10.19
141	2.066	10.34
166	2.038	10.46
191	2.016	10.55
216	2.008	10.63
241	2.004	10.69
266	2.006	10.74
291	2.010	10.79

Table A.12: Weibull parameters for 2018

Height	Shape (k)	Scale (c)
m	–	m/s
63	2.377	10.76
91	2.350	11.04
116	2.331	11.23
141	2.307	11.37
166	2.288	11.50
191	2.271	11.61
216	2.256	11.70
241	2.244	11.78
266	2.235	11.83
291	2.227	11.86

Table A.13: Weibull parameters for 2019

Height	Shape (k)	Scale (c)
m	–	m/s
63	2.304	11.05
91	2.266	11.41
116	2.221	11.63
141	2.184	11.82
166	2.152	11.99
191	2.121	12.14
216	2.088	12.27
241	2.058	12.38
266	2.029	12.44
291	1.998	12.46

Table A.14: Weibull parameters for 2020

Height	Shape (k)	Scale (c)
m	–	m/s
63	2.087	10.89
91	2.051	11.24
116	2.018	11.46
141	1.991	11.68
166	1.967	11.84
191	1.949	11.99
216	1.936	12.14
241	1.927	12.24
266	1.918	12.33
291	1.897	12.28

Table A.15: Weibull parameters for 2021

Height	Shape (k)	Scale (c)
m	–	m/s
63	2.152	9.70
91	2.128	10.00
116	2.113	10.20
141	2.095	10.39
166	2.078	10.54
191	2.058	10.67
216	2.043	10.80
241	2.029	10.94
266	2.000	11.04
291	1.962	11.02

Table A.16: Weibull parameters for 2022

Height	Shape (k)	Scale (c)
m	–	m/s
63	2.078	9.82
91	2.046	10.20
116	2.018	10.43
141	1.994	10.62
166	1.972	10.77
191	1.950	10.90
216	1.934	11.02
241	1.919	11.14
266	1.905	11.22
291	1.889	11.21

Table A.17: Weibull parameters for 2023

Height	Shape (k)	Scale (c)
m	–	m/s
63	2.209	10.75
91	2.187	11.12
116	2.165	11.37
141	2.141	11.61
166	2.118	11.81
191	2.099	11.99
216	2.083	12.16
241	2.069	12.31
266	2.049	12.41
291	2.017	12.40

Table A.18: Weibull parameters for 2024

Height	Shape (k)	Scale (c)
m	–	m/s
63	2.156	10.27
91	2.134	10.66
116	2.107	10.90
141	2.085	11.14
166	2.063	11.32
191	2.048	11.49
216	2.037	11.65
241	2.023	11.77
266	2.009	11.85
291	1.986	11.79

A.4 Wind shear and veer

A.4.1 Wind shear and veer as function of the month

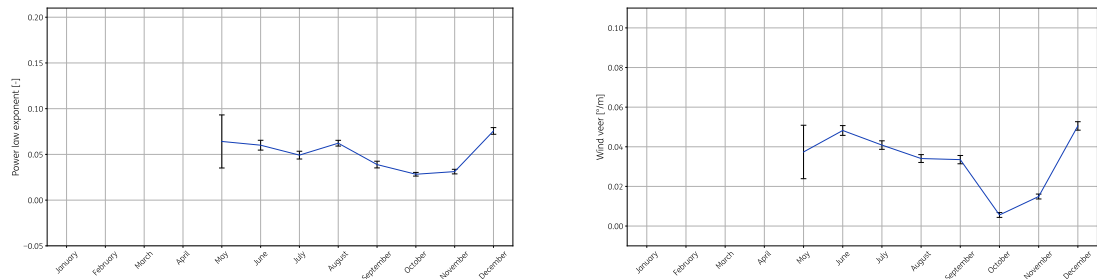


Figure A.19: Wind shear and veer as function of the month-of-year for 2016

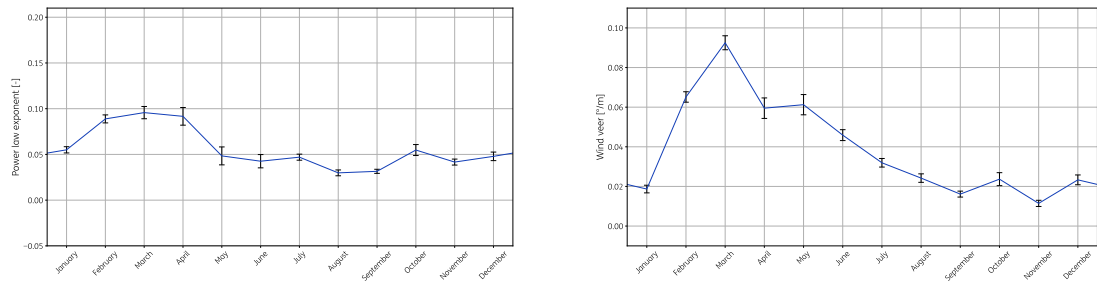


Figure A.20: Wind shear and veer as function of the month-of-year for 2017

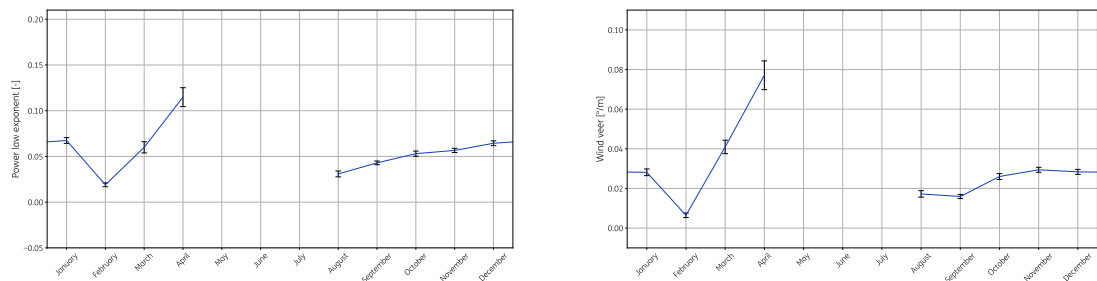


Figure A.21: Wind shear and veer as function of the month-of-year for 2018

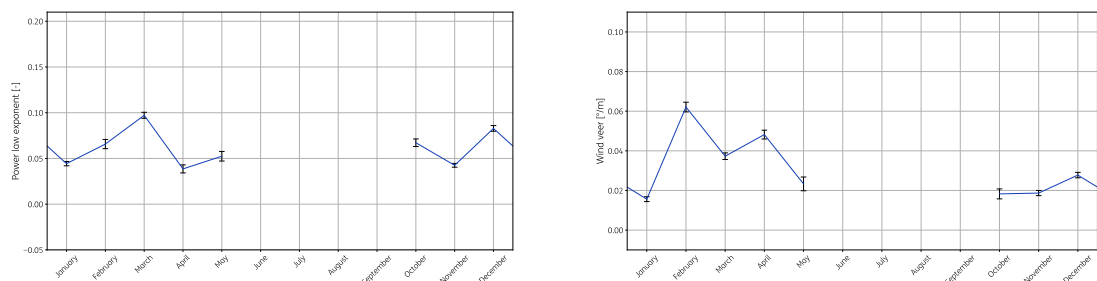


Figure A.22: Wind shear and veer as function of the month-of-year for 2019

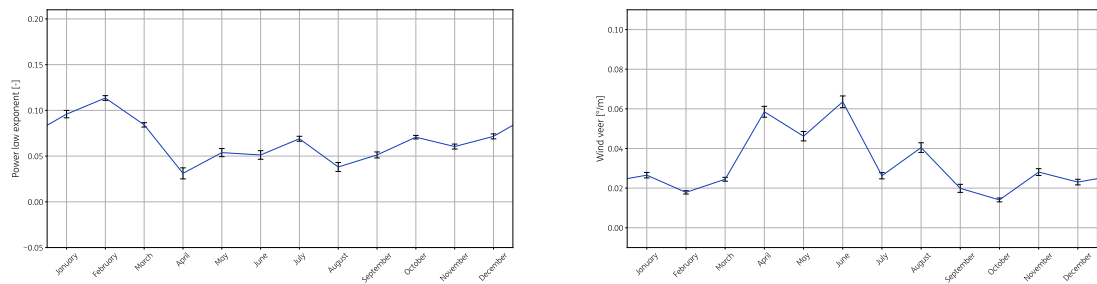


Figure A.23: Wind shear and veer as function of the month-of-year for 2020

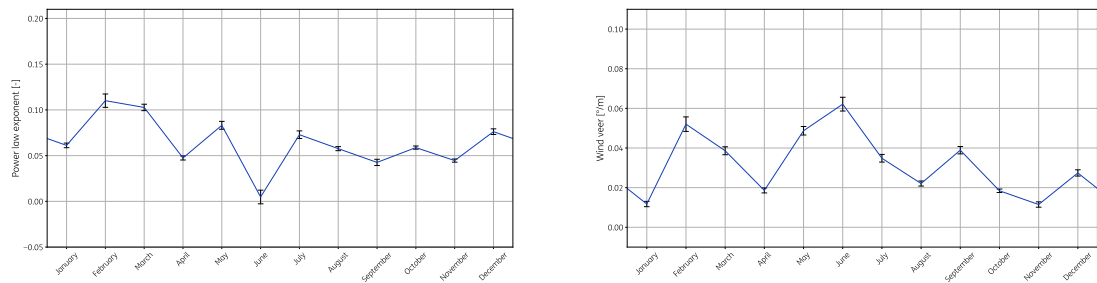


Figure A.24: Wind shear and veer as function of the month-of-year for 2021

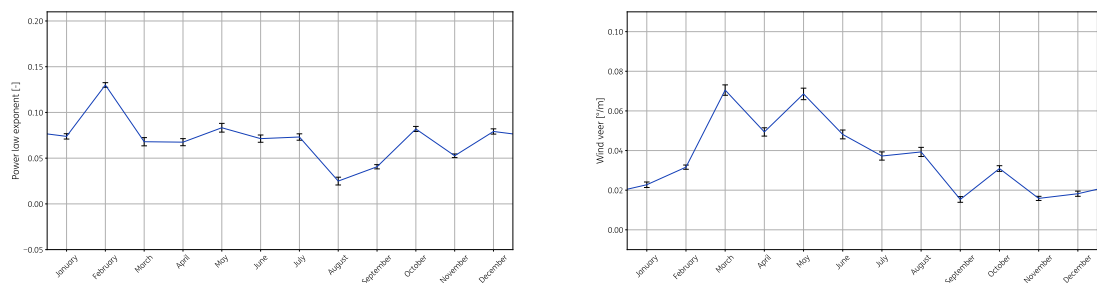


Figure A.25: Wind shear and veer as function of the month-of-year for 2022

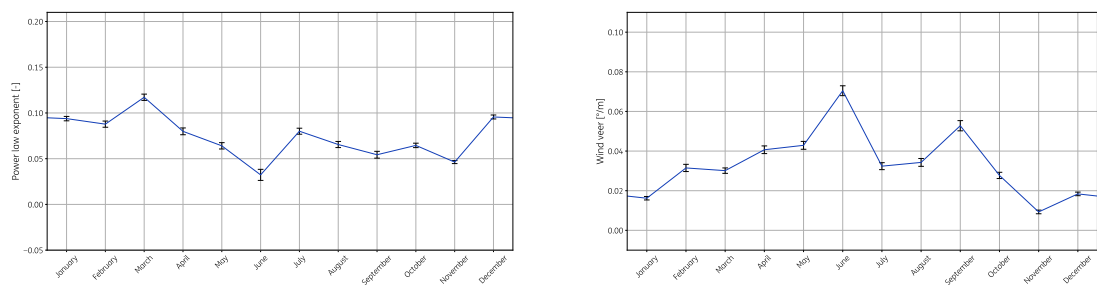


Figure A.26: Wind shear and veer as function of the month-of-year for 2023

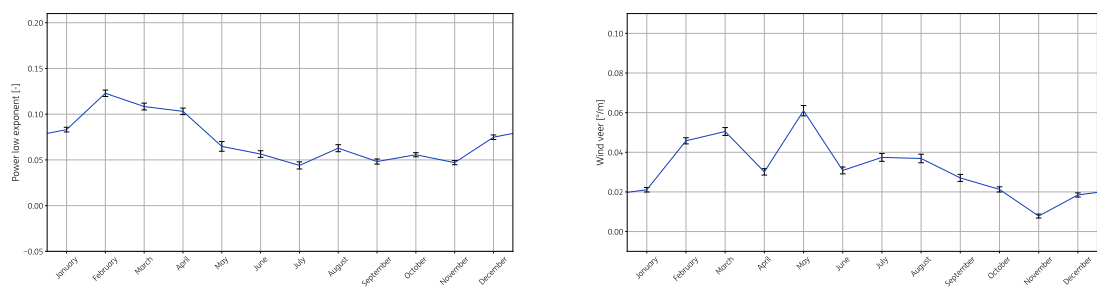


Figure A.27: Wind shear and veer as function of the month-of-year for 2024

A.4.2 Wind shear and veer as function of hour

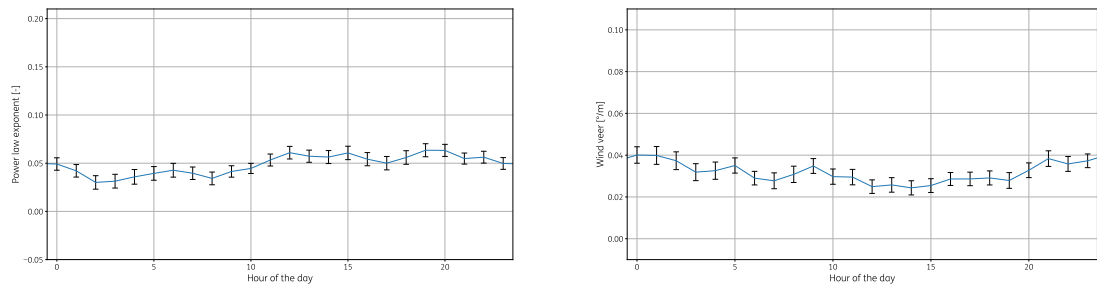


Figure A.28: Wind shear and veer as function the hour-of-day for 2016

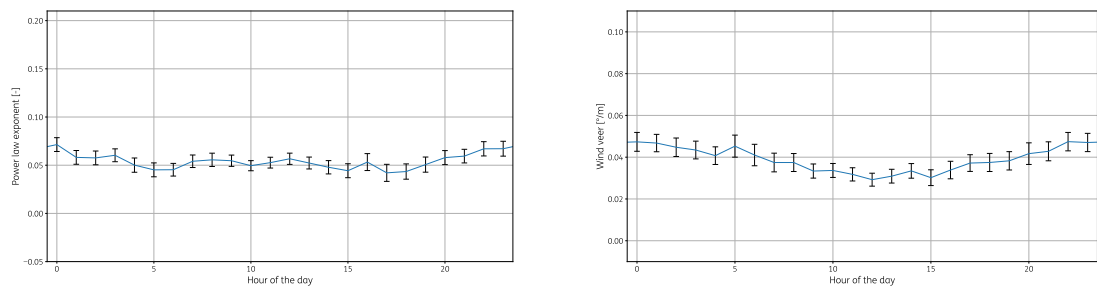


Figure A.29: Wind shear and veer as function the hour-of-day for 2017

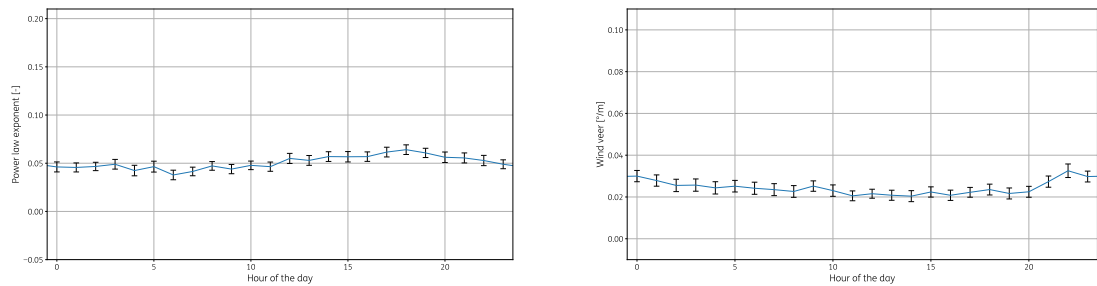


Figure A.30: Wind shear and veer as function the hour-of-day for 2018

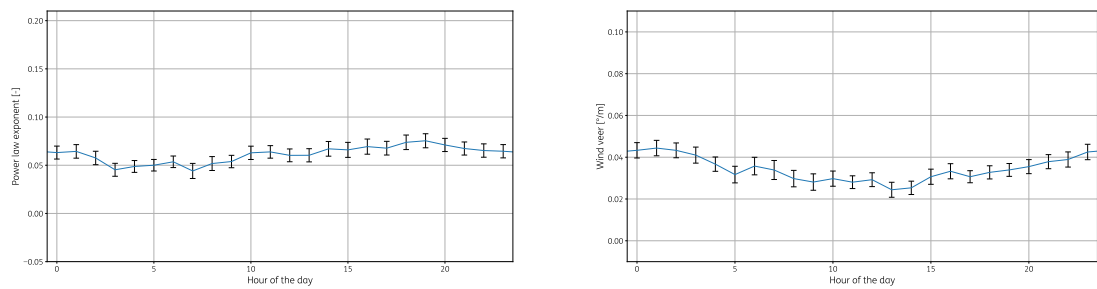


Figure A.31: Wind shear and veer as function the hour-of-day for 2019

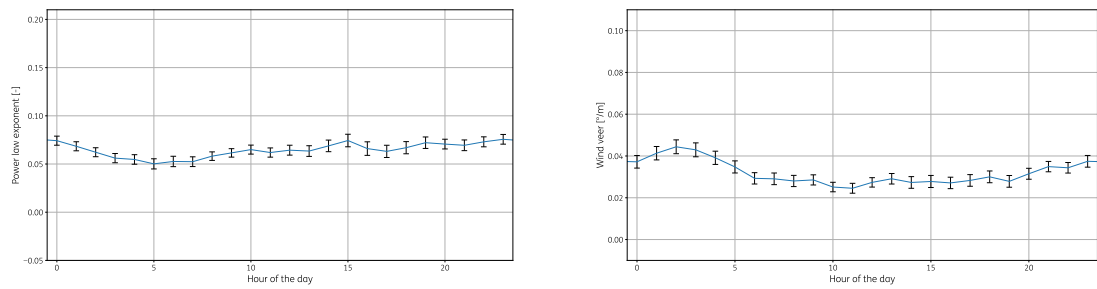


Figure A.32: Wind shear and veer as function the hour-of-day for 2020

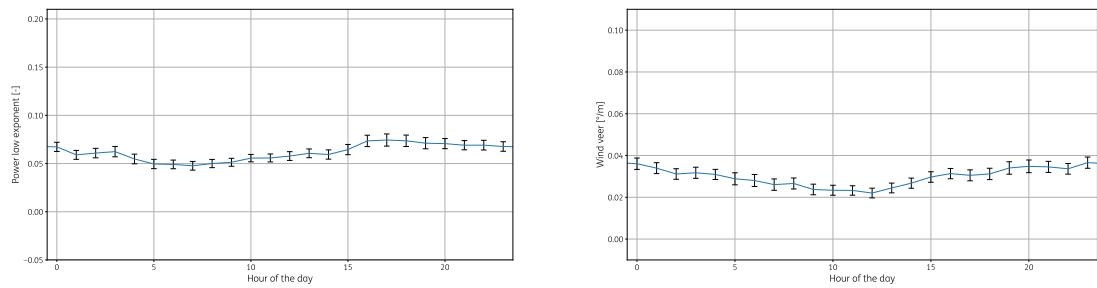


Figure A.33: Wind shear and veer as function the hour-of-day for 2021

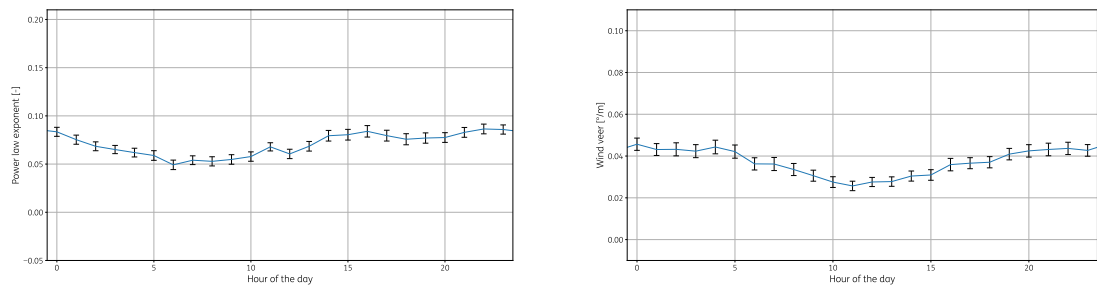


Figure A.34: Wind shear and veer as function the hour-of-day for 2022

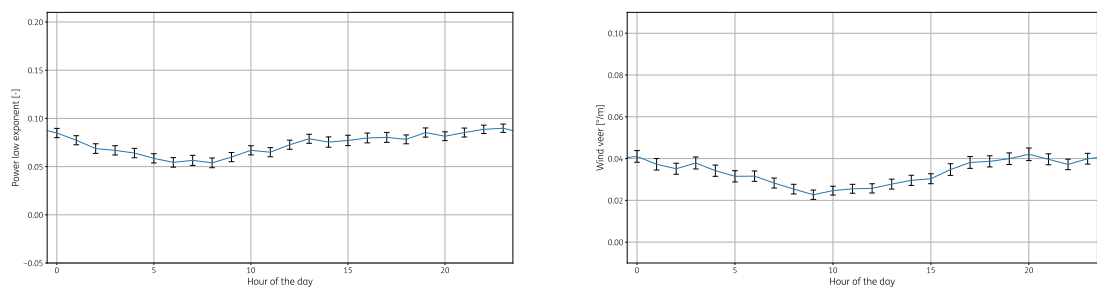


Figure A.35: Wind shear and veer as function the hour-of-day for 2023

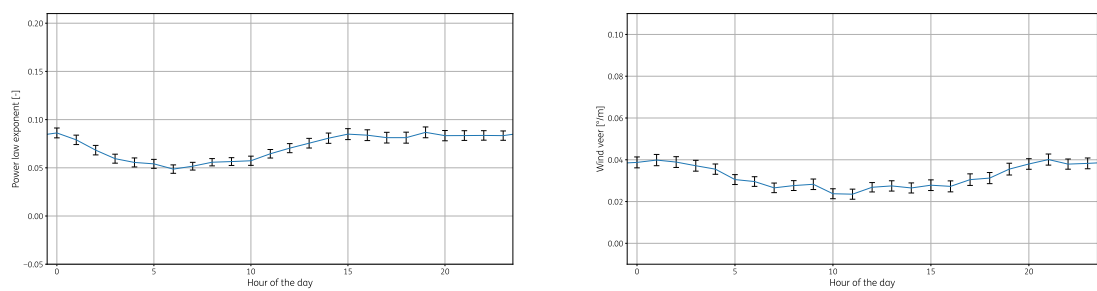


Figure A.36: Wind shear and veer as function the hour-of-day for 2024

A.4.3 Wind shear and veer as function of wind speed

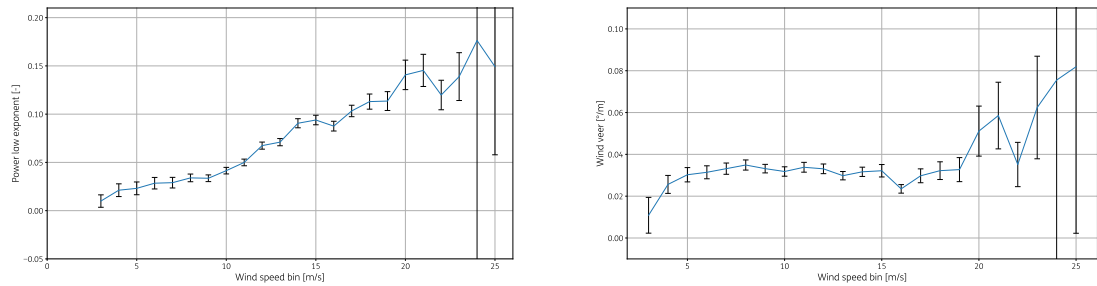


Figure A.37: Wind shear and veer as function of wind speed for 2016

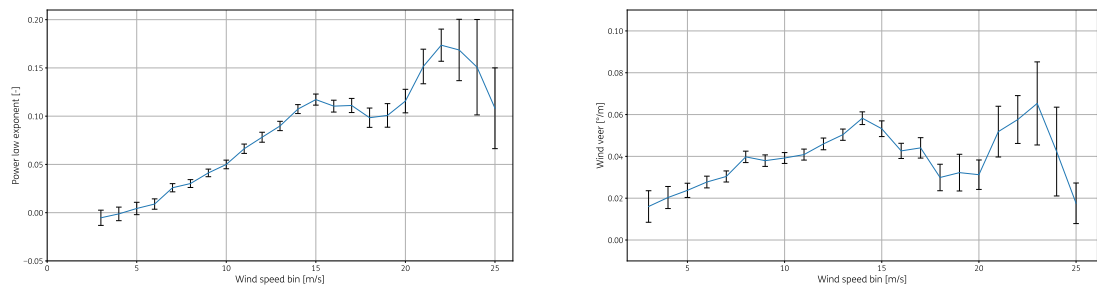


Figure A.38: Wind shear and veer as function of wind speed for 2017

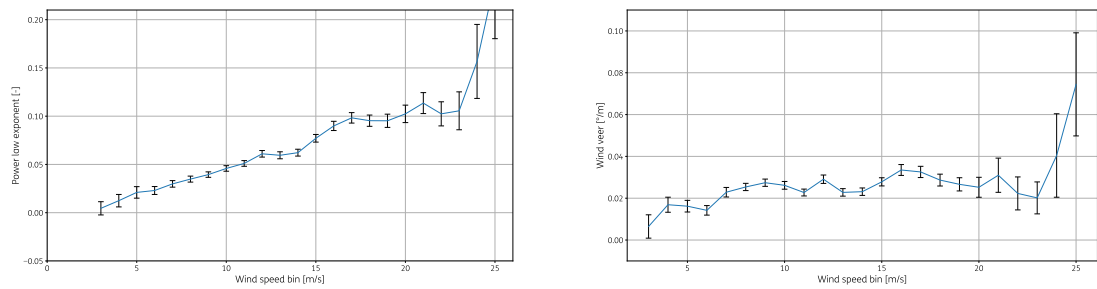


Figure A.39: Wind shear and veer as function of wind speed for 2018

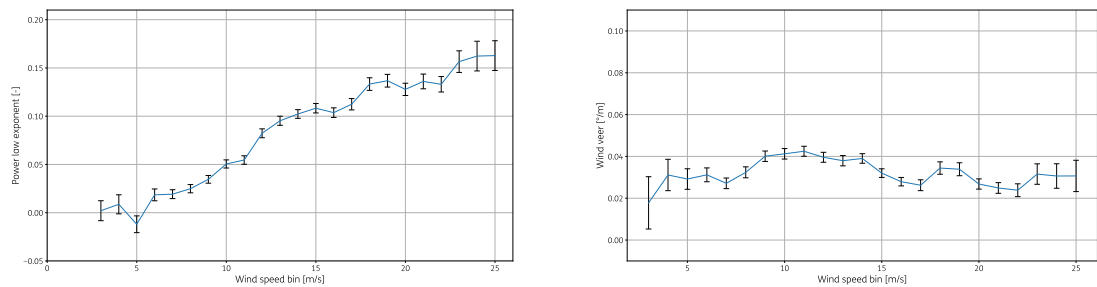


Figure A.40: Wind shear and veer as function of wind speed for 2019

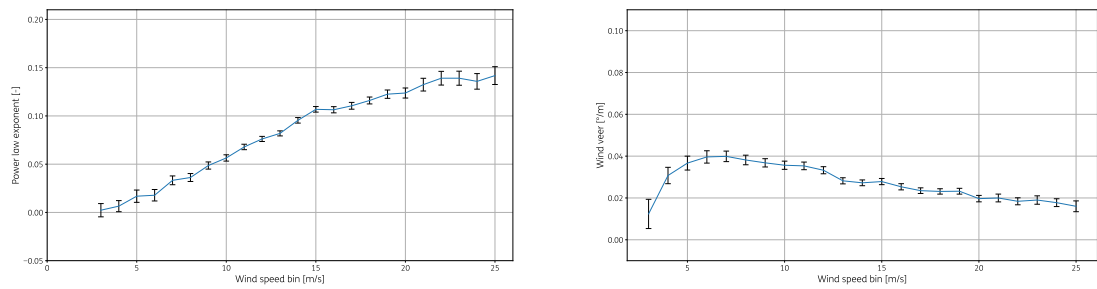


Figure A.41: Wind shear and veer as function of wind speed for 2020

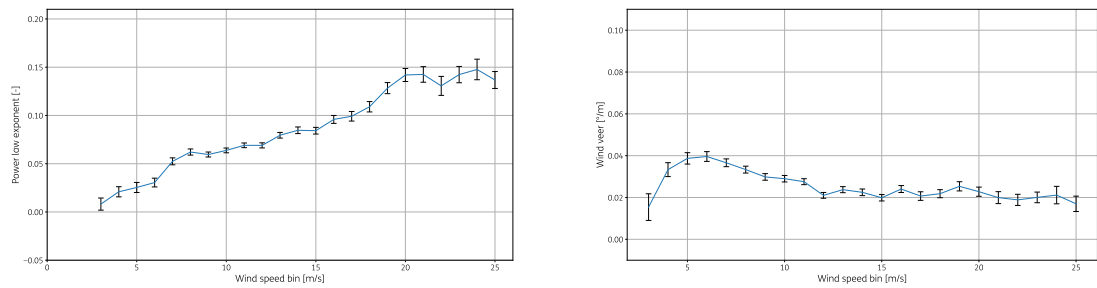


Figure A.42: Wind shear and veer as function of wind speed for 2021

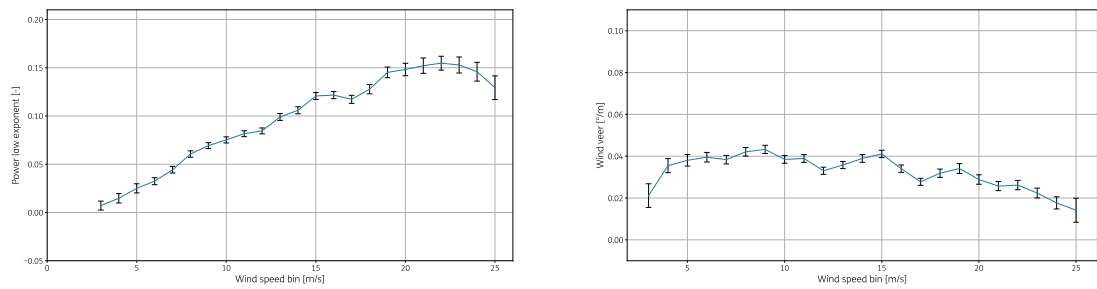


Figure A.43: Wind shear and veer as function of wind speed for 2022

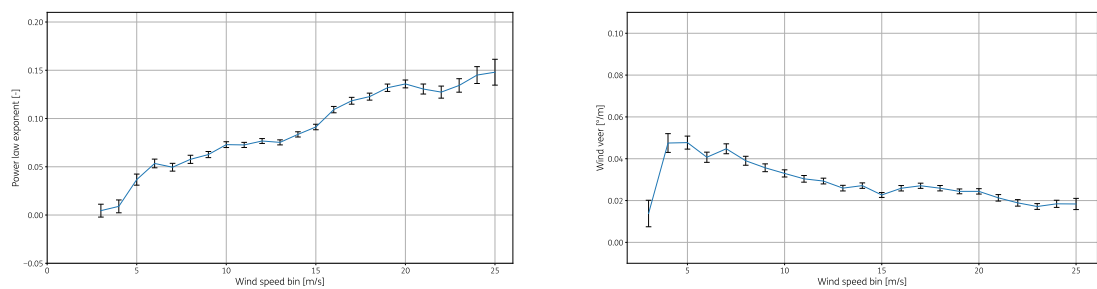


Figure A.44: Wind shear and veer as function of wind speed for 2023

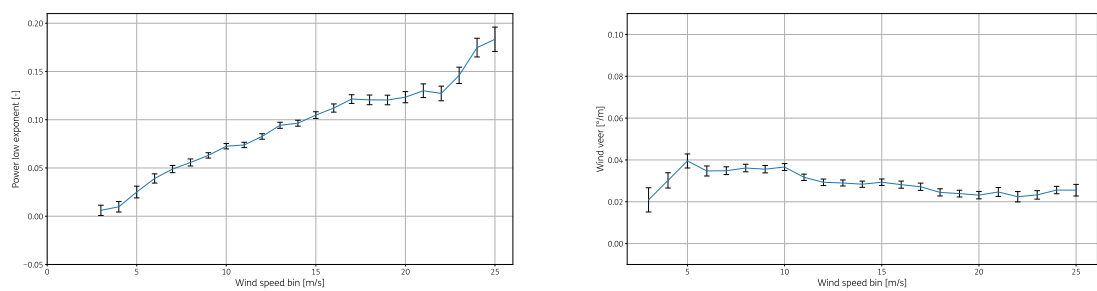


Figure A.45: Wind shear and veer as function of wind speed for 2024

A.4.4 Wind shear and veer as function of wind direction

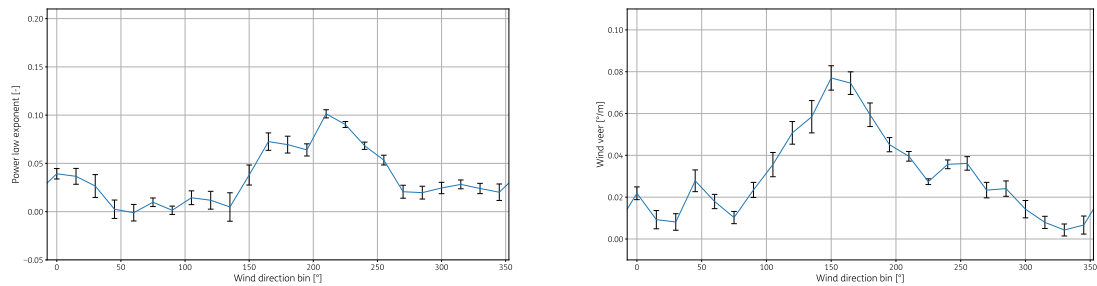


Figure A.46: Wind shear and veer as function of wind direction for 2016

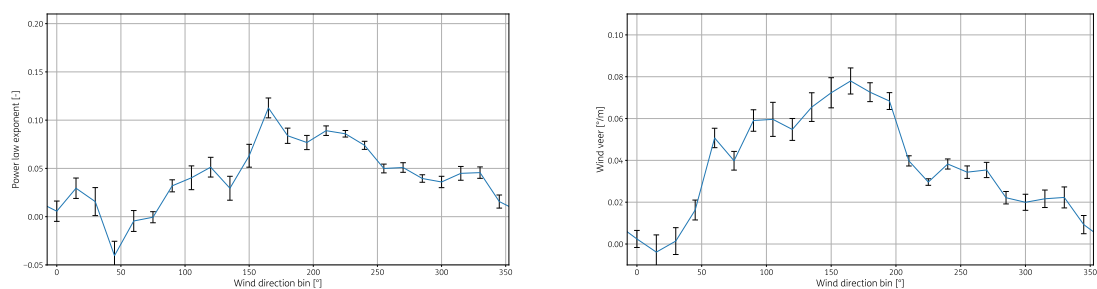


Figure A.47: Wind shear and veer as function of wind direction for 2017

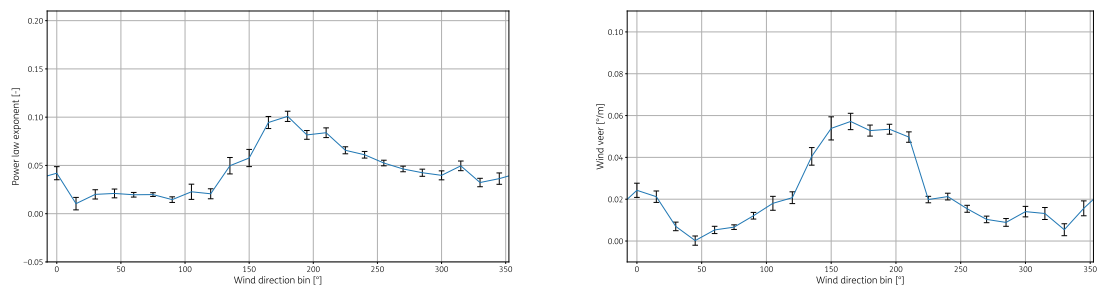


Figure A.48: Wind shear and veer as function of wind direction for 2018

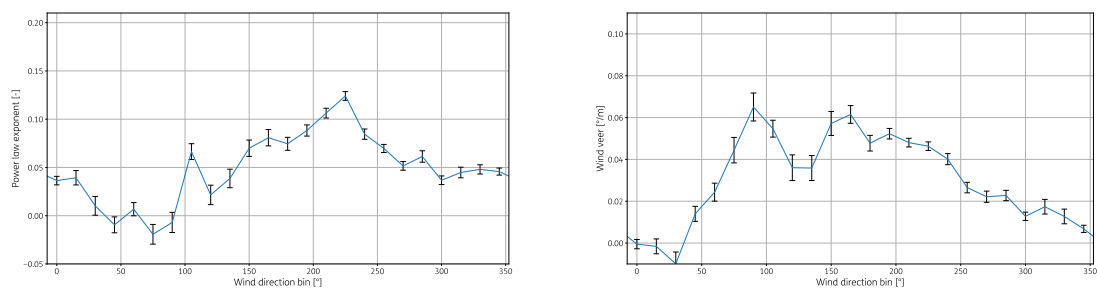


Figure A.49: Wind shear and veer as function of wind direction for 2019

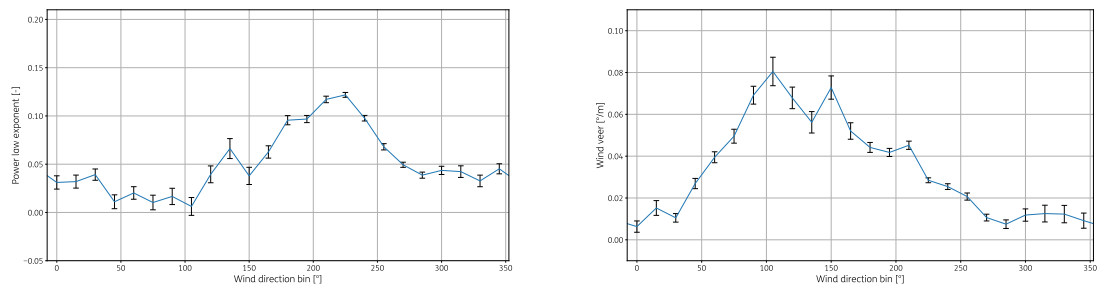


Figure A.50: Wind shear and veer as function of wind direction for 2020

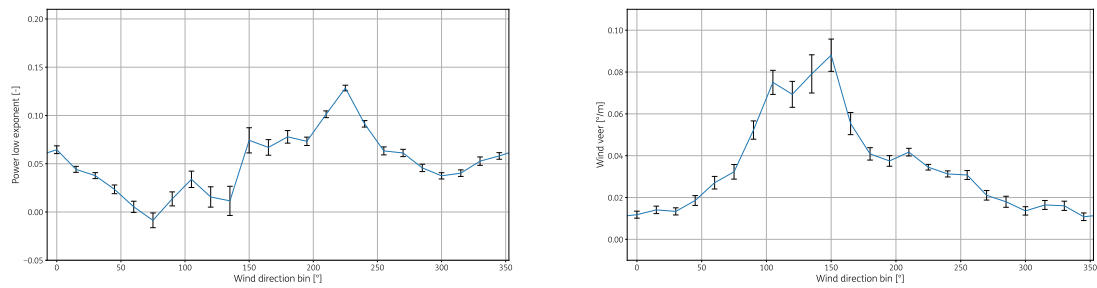


Figure A.51: Wind shear and veer as function of wind direction for 2021

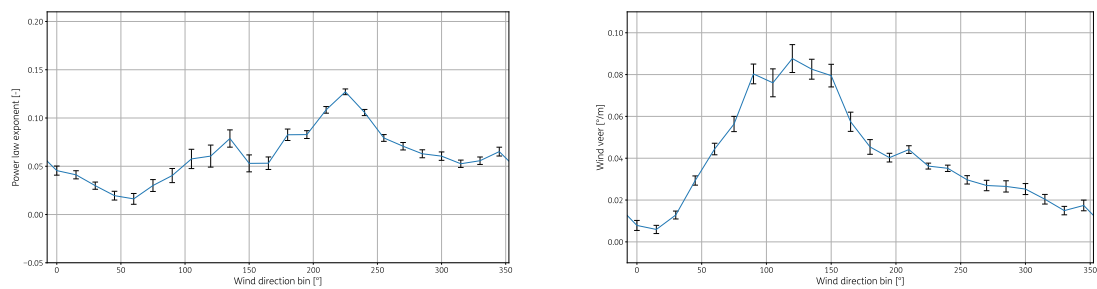


Figure A.52: Wind shear and veer as function of wind direction for 2022

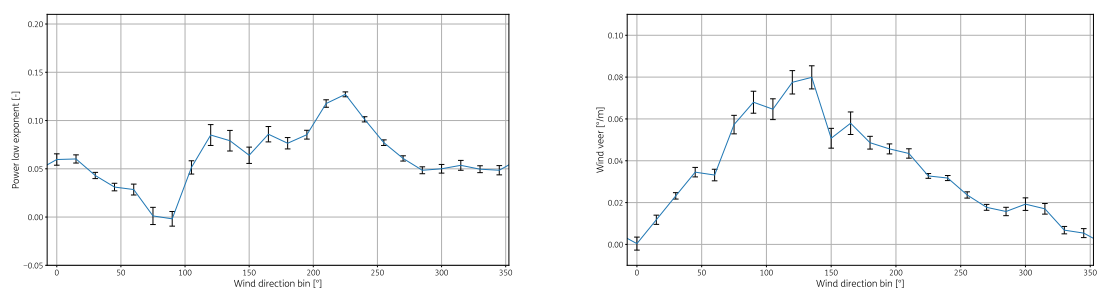


Figure A.53: Wind shear and veer as function of wind direction for 2023

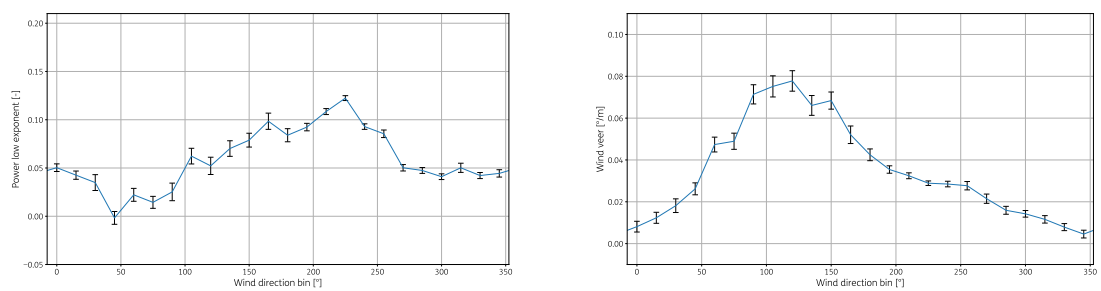


Figure A.54: Wind shear and veer as function of wind direction for 2024

A.4.5 Wind shear and veer as function of wind speed and wind direction

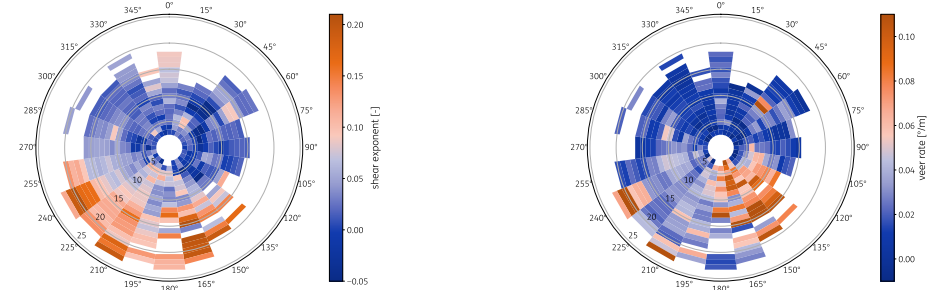


Figure A.55: Wind shear and veer as function of wind speed and direction for 2016

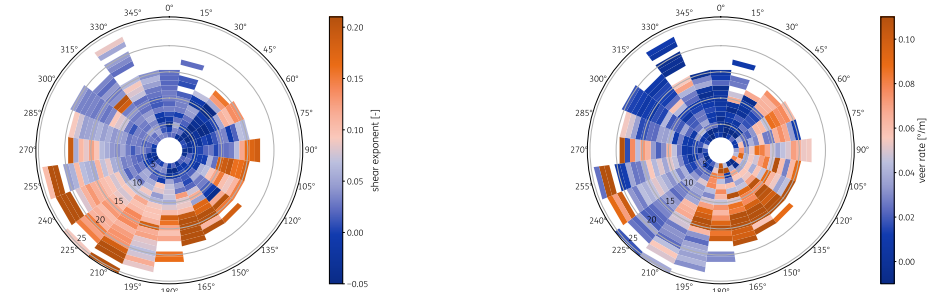


Figure A.56: Wind shear and veer as function of wind speed and direction for 2017

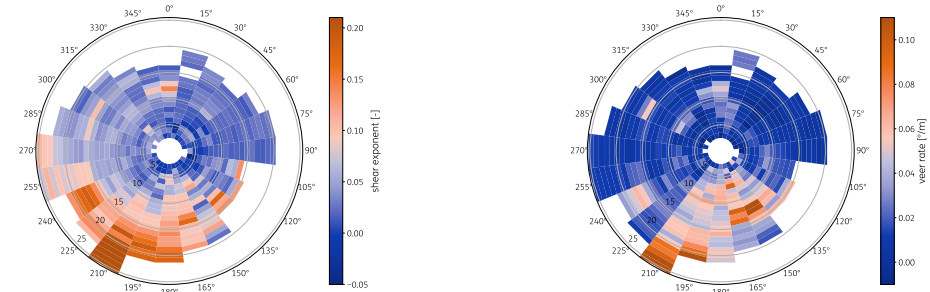


Figure A.57: Wind shear and veer as function of wind speed and direction for 2018

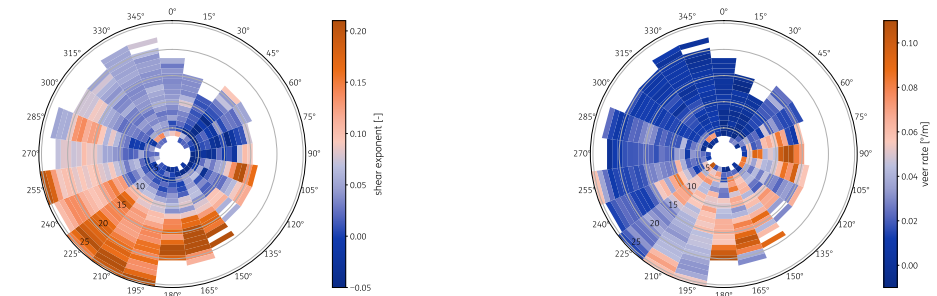


Figure A.58: Wind shear and veer as function of wind speed and direction for 2019

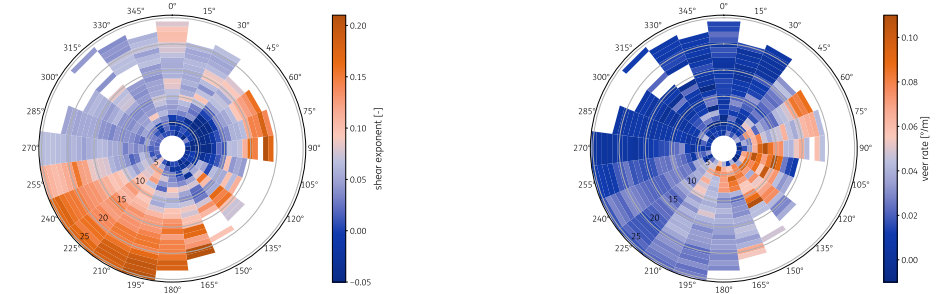


Figure A.59: Wind shear and veer as function of wind speed and direction for 2020

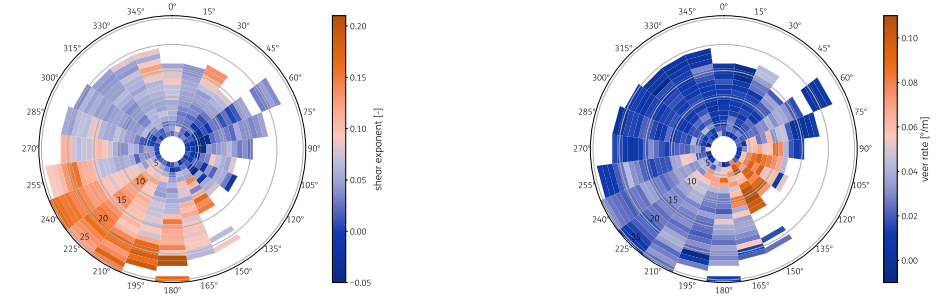


Figure A.60: Wind shear and veer as function of wind speed and direction for 2021

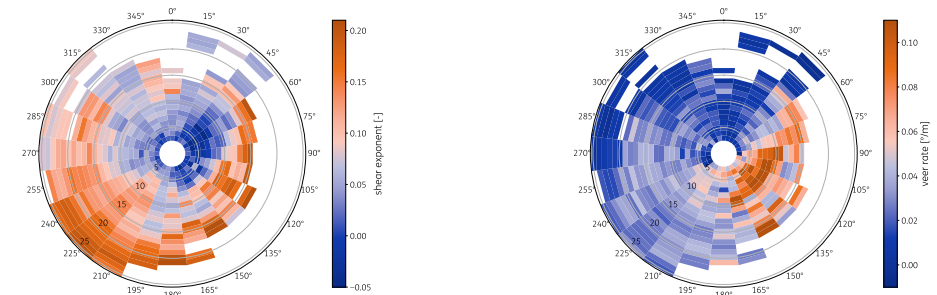


Figure A.61: Wind shear and veer as function of wind speed and direction for 2022

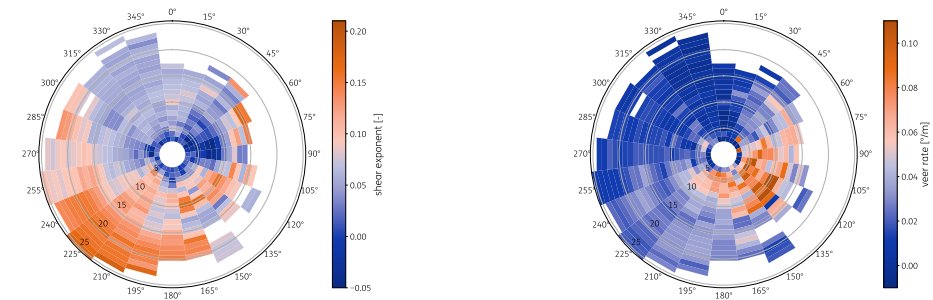


Figure A.62: Wind shear and veer as function of wind speed and direction for 2023

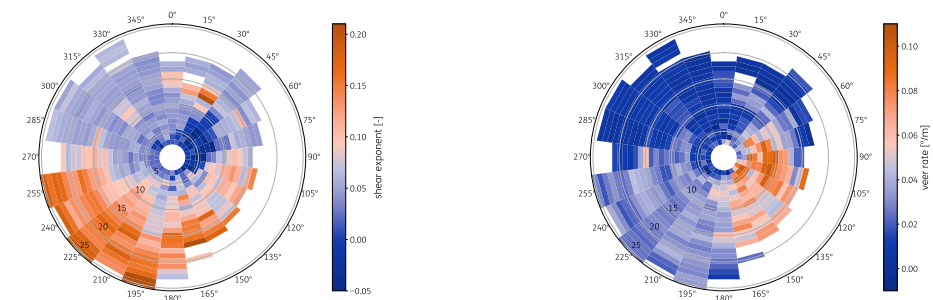


Figure A.63: Wind shear and veer as function of wind speed and direction for 2024

Energy & Materials Transition

Westerduinweg 3
1755 LE Petten
www.tno.nl