



Intercloud Architecture Framework for Interoperability and Integration

Release 2, Draft Version 0.7

Yuri Demchenko, Canh Ngo, Marc X. Makkes, Rudolf Strijkers

1 July 2013

<http://staff.science.uva.nl/~demch/worksinprogress/sne2012-techreport-12-05-intercloud-architecture-draft07.pdf>

Abstract

This report presents on-going research to develop the Intercloud Architecture Framework (ICAF) that addresses interoperability and integration issues in multi-provider multi-domain heterogeneous Cloud based infrastructure services and applications provisioning, including integration and interoperability with the legacy infrastructure services. Cloud technologies are evolving as a common way of infrastructure services and resources virtualisation and provisioning on-demand. In this way, they bring applications and infrastructure services mobility and physical/hardware platform independency to the existing distributed computing and networking technologies. The report refers to existing standards in Cloud Computing, in particular, recently published NIST Cloud Computing Reference Architecture (CCRA). The proposed Intercloud Architecture Framework defines five complimentary components addressing Intercloud interoperability and integration: multi-layer Cloud Services Model (CSM) that combines commonly adopted cloud service models, such as IaaS, PaaS, SaaS, with the underlying resources virtualisation layers and upper access and delivery layer; Intercloud Control and Management Plane (ICCMP) that supports cloud based applications interaction; Intercloud Federation Framework (ICFF), Intercloud Operation Framework (ICOF), and Intercloud Security Framework.

The current version incorporates recent developments on defining the ICFF basic operational model and architecture patterns that includes customer side federation and provider side federation models.

The report briefly presents the architectural framework for cloud based infrastructure services provisioned on-demand being developed by authors that can be used as a basis for building multilayer cloud services integration framework that can allow optimised provisioning of both computing, storage and networking resources. The proposed architecture is intended to provide a conceptual model for developing Intercloud middleware and in this way will facilitate clouds interoperability and integration.

Table of Contents

1	Introduction	3
2	Cloud Standardisation Overview	3
2.1	IEEE Intercloud Working Group (IEEE P2302)	4
2.2	ITU-T Focus Group on Cloud Computing	4
2.3	NIST Cloud Computing related standards	4
2.4	ITU-T Cloud Network Infrastructure Model	5
2.5	Extending Cloud definition and CCRA to address Intercloud issues	6
3	General use cases for ICAF	7
4	ICAF Definition and Requirements	9
5	Multi-Layer Cloud Services Model (CSM)	11
5.1	Moving from the proprietary cloud services model to the layered model	11
5.2	Definition of inter-layer interfaces	12
6	Intercloud Control and Management Plane	13
7	Intercloud Federation Framework (ICFF)	15
7.1	General Federated Cloud Infrastructure Model	15
7.2	ICFF definition and components	15
7.2.1	Cloud Service Broker	16
7.2.2	Service registry	17
7.2.3	Identity Provider	17
7.3	Intercloud Federation Operational Patterns	17
7.3.1	Roles and Actors	17
7.3.2	Customer side and Provider side Federations	18
8	Intercloud Operation Framework	20
8.1	Intercloud Operations Framework Model	20
8.2	RORA Model	20
9	Abstract Model for Cloud based Infrastructure Services Provisioning	22
9.1	General model	22
9.2	Virtual Infrastructure Composition and Management Layer	23
9.3	Infrastructure Services Modeling Framework	24
9.3.1	Resource Modeling	24
9.3.2	Virtual Resource Lifecycle	25
10	Security Infrastructure for Federated Intercloud Infrastructure Services	26
11	Implementation Status and Suggestions	27
12	Summary and Future Development	27
13	References	28

1 Introduction

Cloud Computing technologies [1, 2] are emerging as infrastructure services for provisioning computing and storage resources on-demand in a simple and uniform way and may involve multi-provider and multi-domain resources, including integration with the legacy services and infrastructures. In this way, clouds represent a new step in evolutionary computing and communication technologies development chain by introducing a new type of services and a new abstraction layer for the general infrastructure services virtualisation (similar to utilities) and mobility. Current development of the cloud technologies demonstrate movement to developing Intercloud models, architectures and integration tools that could allow integrating cloud based infrastructure services into existing enterprise and campus infrastructures, on one hand, and provide common/interoperable environment for moving existing infrastructures and infrastructure services to virtualised cloud environment. More complex and enterprise oriented use of cloud infrastructure services will require developing new service provisioning and security models that could allow creating complex project and group oriented infrastructures provisioned on-demand and across multiple providers.

Cloud based virtualisation allows for easy upgrade and/or migration of enterprise application, including also the whole IT infrastructure segments. This brings significant cost saving comparing to traditional infrastructure development and management that requires lot of manual work.

Cloud based applications operate as regular applications in particular using modern SOA Web Services platforms for services and applications integration, however their composition and integration into distributed cloud based infrastructure will require a number of functionalities and services that can be jointly defined as Intercloud Architecture.

This report presents on-going research at the University of Amsterdam to develop the Intercloud Architecture Framework (ICAF) that should address problems with multi-domain heterogeneous cloud based applications integration and interoperability, including integration and interoperability with legacy infrastructure services, and to facilitate interoperable and measurable intra-provider infrastructures and clouds federation. The papers refers to the architectural framework for provisioning Cloud Infrastructure Services On-Demand [3] being developed by authors as a result of cooperative efforts in a number of currently running projects such as GEANT3 [4] and GEYSERS [5], that provides a basis for defining the proposed Intercloud architecture. This report summarises numerous discussions, developments and experimentations in a number of other projects the SNE group of the University of Amsterdam is involved.

The report is organised as follows. Section 2 provides overview and detailed analysis of the on-going standardisation activities at NIST and IEEE that have direct relation with and provide a basis for the proposed ICAF. Section 3 describes basic use cases for defining ICA. Section 4 summarises the requirements and defines the main components of the proposed Intercloud architecture. Section 5 describes the proposed multi-layer cloud services model. Sections 6-8 consequently introduce basic functionality of the Intercloud Control and Management Plane, Intercloud Federation Framework, and Intercloud Operation Framework. Section 9 describes the abstract model for cloud based infrastructure services provisioning that also include the Virtual Infrastructure Composition and Management layer and Infrastructure Services Modelling Framework. Section 10 provides information about current implementation status and suggestions for future developments.

2 Cloud Standardisation Overview

For the purpose of this paper, in this section we provide detailed analysis of the related standards by National Institute of Standards and Technology (NIST) that define the Cloud Computing technology and Cloud Computing Reference Architecture, and IEEE standardisation activity to define Intercloud Interoperability and Federation framework. Suggestions are provided for the required extensions in the context of the proposed Intercloud Architecture.

At this stage of our research, we don't provide overview of the standards that define internal cloud management, components design and communications. This category of standards is well presented by DMTF, SNIA and OGF standards that correspondingly define standards for Open Virtual Machine Format (OVF) [7], Cloud Data Management Interface (CDMI) [8], and Open Cloud Computing Interface (OCCI)

[9]. These standards are commonly accepted by industry and provide a basis for intra-provider infrastructure operation and services delivery to customers.

2.1 IEEE Intercloud Working Group (IEEE P2302)

IEEE P2302 Working Group recently published a draft Standard on Intercloud Interoperability and Federation (SIIF) [10] that proposes an architecture that defines topology, functions, and governance for cloud-to-cloud interoperability and federation.

Topological elements include clouds, roots, exchanges (which mediate governance between clouds), and gateways (which mediate data exchange between clouds). Functional elements include name spaces, presence, messaging, resource ontologies (including standardized units of measurement), and trust infrastructure. Governance elements include registration, geo-independence, trust anchor, and potentially compliance and audit.

However, the proposed approach has a limited scope by attempting to address a hypothetical scenario when all resources and applications are located and run in multiple clouds and they need to be federated similar to Content Distribution Network (CDN) [11]. The proposed architecture tries to replicate the CDN approach but doesn't address the generic problems with interoperability and integration of the heterogeneous multi-domain and multi-provider cloud base infrastructure.

The proposed in [12] solutions use extended XMPP protocol as a base for the Intercloud protocol, what requires creating an Intercloud root that will interact with exchange hosts in each cloud domain to support communications, trust management and identity federation.

The proposed architecture originated from the position paper published by Cisco in 2009 [13] that tried to leverage the basic routing and messaging Internet protocols such as BGP, OSPF, XMPP to address Intercloud integration and interoperability.

The limitation of the proposed architecture and approach is that it tries to closely imitate Internet approach in building hierarchical interconnected infrastructure for Internet protocol based services to support Intercloud communication. But actually there is no need for such additional Intercloud layer or infrastructure because cloud applications and infrastructure can use all Internet technologies directly to support intra-provider communications and user-customer-provider or inter-provider communications, given the appropriate network virtualisation and address translation technologies are used. Cloud technologies provide a virtualisation platform for IT and network services and allow for the entire infrastructure instantiation together with related protocols and core infrastructure services related to control and management functions.

2.2 ITU-T Focus Group on Cloud Computing

The ITU-T Focus Group on Cloud Computing (FG-Cloud) [14] was established to identify the telecommunication aspects, i.e. the transport via telecommunications networks, security aspects of telecommunications, service requirements, etc., in order to support cloud services/applications and suggest the further studies and ITU-T standardization activities.

As a result of its chartered operation in 2010-2011, the FG-Cloud published the Technical Report (Part 1 to 7) [15] that presents taxonomies, use cases, functional, cloud infrastructure and reference architecture definition, cloud security. The reports also analyse the cloud technology benefits from telecommunication perspectives and discuss scenarios with inter-cloud peering, federation and brokering.

2.3 NIST Cloud Computing related standards

NIST is active in fostering cloud computing practices that support interoperability, portability, and security requirements that are appropriate and achievable for important usage scenarios. Since first publication of the currently commonly accepted NIST Cloud definition in 2008, NIST is leading wide internationally recognised activity on defining conceptual and standard base in Cloud Computing, which has been resulted in publishing the following documents that create a solid base for cloud services development and offering:

- NIST SP 800-145, A NIST definition of cloud computing[1]
- NIST SP 500-292, Cloud Computing Reference Architecture, v1.0 [2]

- DRAFT NIST SP 800-146, Cloud Computing Synopsis and Recommendations [16]
- NIST SP500-291 NIST Cloud Computing Standards Roadmap [17]

NIST SP 800-145 document defines Cloud Computing in the following way:

“Cloud computing is a model for enabling ubiquitous, convenient, on-demand network access to a shared pool of configurable computing resources (e.g., networks, servers, storage, applications, and services) that can be rapidly provisioned and released with minimal management effort or service provider interaction. This cloud model promotes availability and is composed of five essential characteristics (on-demand self-service, broad network access, resource pooling, rapid elasticity, measured Service), 3 service/provisioning models. (Software as a Service (SaaS), Platform as a Service (PaaS), Infrastructure as a Service (IaaS)), 4 deployment models (public, private, community, hybrid clouds).”

The IaaS service model is defined in the following way:

“The capability provided to the consumer is to provision processing, storage, networks, and other fundamental computing resources where the consumer is able to deploy and run arbitrary software, which can include operating systems and applications. The consumer does not manage or control the underlying cloud infrastructure but has control over operating systems, storage, deployed applications, and possibly limited control of select networking components (e.g., host firewalls).”

Figure 2.1 presents a high level view of the NIST Cloud Computing Reference Architecture (CCRA), which identifies the major actors (Cloud Consumer, Cloud Service Provider, Cloud Auditor, Cloud Broker, and Cloud Carrier), their activities and functions in cloud computing. A cloud consumer may request cloud services from a cloud provider directly or via a cloud broker. A cloud auditor conducts independent audits and may contact the others to collect necessary information.

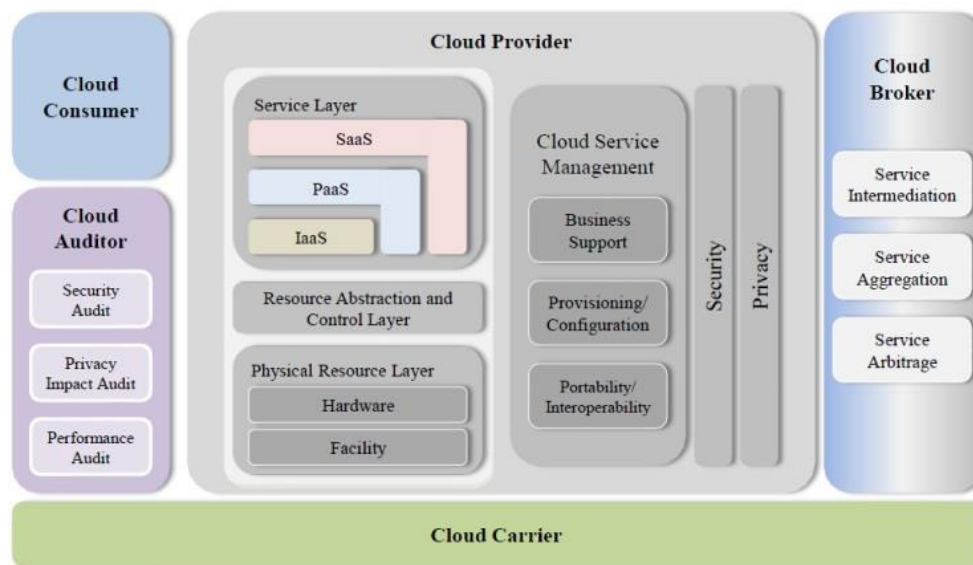


Figure 2.1. NIST Cloud Computing Reference Architecture (CCRA) [2]

The proposed architecture is suitable for many purposes where network performance is not critical but needs to be extended with explicit network services provisioning and management when the cloud applications are critical to network latency like in case of enterprise applications, business transactions, crisis management, etc.

2.4 ITU-T Cloud Network Infrastructure Model

As a result of its chartered operation in 2010-2011, the FG-Cloud published the Technical Report (Part 1 to 7) [14] that presents taxonomies, use cases, functional, cloud infrastructure and reference architecture definition, cloud security. The report also analyses the cloud technology benefits from telecommunication perspectives and discusses scenarios with inter-cloud peering, federation and brokering.

The document “Part 2: Functional requirements and reference architecture” defines the layered Cloud computing architecture that includes the following layers:

- Resources and network layer (including physical resources, pooling and orchestration, pooling and virtualisation)
- Cloud services layer (including basic cloud services IaaS, PaaS, SaaS and also Orchestration service)
- Access layer (including endpoint functions and inter-cloud functions,) where the role of network service providers is defined as to provide inter-cloud transport network
- User layer (including user functions, partner functions, administration functions).

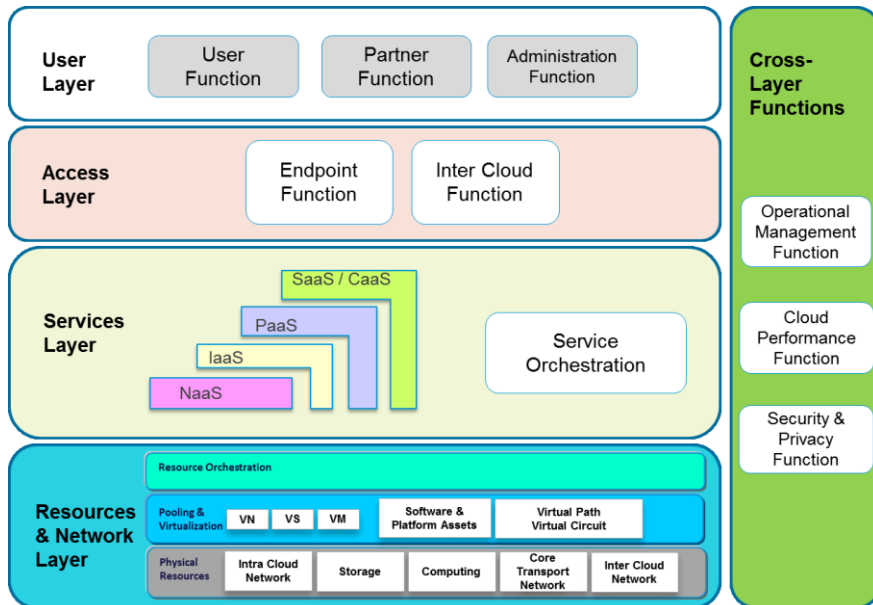


Figure 2.2. ITU-T Reference model for Cloud Services [15]

The document “Part 3: Requirements and framework architecture of cloud infrastructure” provides well-defined general requirements to cloud infrastructure from the point of view of the telecom providers. The proposed cloud infrastructure definition is based on the convergence principle recently adopted by telecom industry that uses “one wire” concept for convergence of service traffic, storage traffic, backup traffic, and management traffic.

The document proposes the model for cloud network infrastructure that includes core transport network, intra-cloud network, and intercloud network. Issues related to network interface cards (NIC) virtualisation and virtual machines migration are discussed. The document provides suggestions for cloud network topology design and definition of the virtualised network components such as cloud switch and cloud routes. General use cases for ICAF

2.5 Extending Cloud definition and CCRA to address Intercloud issues

NIST CCRA and Cloud Computing definition are well suited for describing service and business or operational relations, however it has limited applicability for design purposes and defining basic functional components and related interfaces between component services and functional layers.

Despite that the recently published CCRA includes Cloud Carrier as representing typical role of the telecom operators that can provide network connectivity as a 3rd party service, there is no well-defined service model how this can be done. The IaaS cloud service model doesn’t include explicitly provisioning of the controlled network services and infrastructure. The reason for this is that cloud computing has been developed primarily for provisioning storage and computing resources and in assumption that network connectivity is provided as ubiquitous Internet connectivity. However, this situation presents serious limitations for large scale use of cloud in enterprise applications that require guaranteed network connectivity QoS and low network latency, in particular.

Another limitation of the current CCRA is that it is not suitable for defining required security infrastructure and its integration with main Cloud services or infrastructure that can be potentially multilayer and multi-domain.

The following extension/improvement should be made to at least Cloud IaaS model to meet requirements of the wide range of the critical enterprise services (other service models such as PaaS, SaaS should also allow management of network related parameters):

- Define layered cloud services model that is suitable for defining main inter-layer and inter-service (functional) interfaces
- Define resources and services virtualisation as one of cloud features (where virtualisation includes resources abstraction, pooling, composition, instantiation, orchestration, and lifecycle management)
- Include improved network services definition capable of provisioning required QoS and allowing control from user run applications.
- Define infrastructure services as a new type of services that include the following attributes/features:
 - Topology describing computing, storage resources and interconnecting them network infrastructure
 - Infrastructure/topology description format that allows topology transformation operations for infrastructure control and optimization (e.g., homomorphic, isomorphic, QoS, energy aware etc.)

In the context of the above definition, cloud infrastructure may include:

- Internal cloud provider infrastructure which is provided as a services, and
- External or Intercloud infrastructure that can be provided by either cloud operator or network services provider.

In relation to business/operational aspects, the CCRA should be extended to address the following features:

- Better definition of the Cloud Carrier role, operational model and interaction with other key actors;
- Extend a set of basic roles with such roles typical for telecom operators/providers as Cloud/infrastructure Operator, and split Customer role on Customer and User as representing customer organization and end-user.

3 General use cases for ICAF

The three basic use cases for Intercloud Architecture can be considered:

(1) Enterprise IT infrastructure migration to cloud and evolution that will require both integration of the legacy infrastructure and cloud based components, and move from general cloud infrastructure services to specialised private cloud platform services;

(2) large project-oriented scientific infrastructures including dedicated transport network infrastructure that need to be provisioned on-demand [18];

(3) IT infrastructure disaster recovery that requires not only data backup but also the whole supporting infrastructure restoration/setup on possibly new computer/cloud software or hardware platform.

The networking research area itself introduces another use case for wide spread “cloud + network” infrastructure to support small and medium scientific experiments for testing new protocols and network dynamics that are too small for super computers but too big for desktop systems. All use cases should allow the whole infrastructure of computers, storage, network and other utilities to be provisioned on-demand, physical platform independent and allow integration with local persistent utilities and legacy services and applications.

Figures 2.1 illustrates the typical example of building e-Science or enterprise collaborative infrastructure based on the defined scientific or enterprise workflow that includes campus/enterprise proprietary infrastructure and cloud based computing and storage resources, instruments, visualization system, interconnecting network infrastructure, and users represented by user clients.

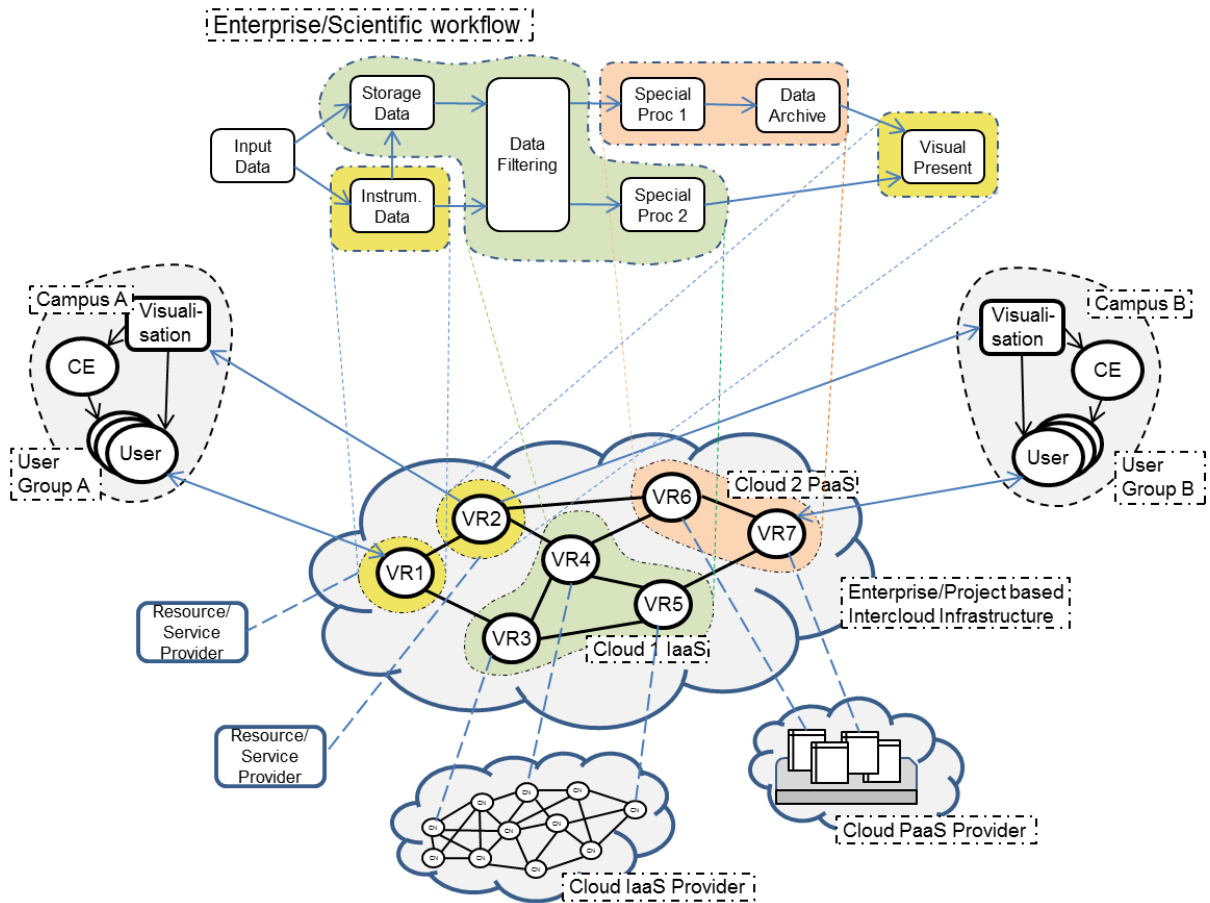


Figure 2.1. Enterprise or project oriented collaborative cloud based infrastructure including IaaS (VR3-VR5) and PaaS (VR6, VR7) cloud infrastructure segments, separate virtualised resources or services (VR1, VR2) and two interacting campuses A and B.

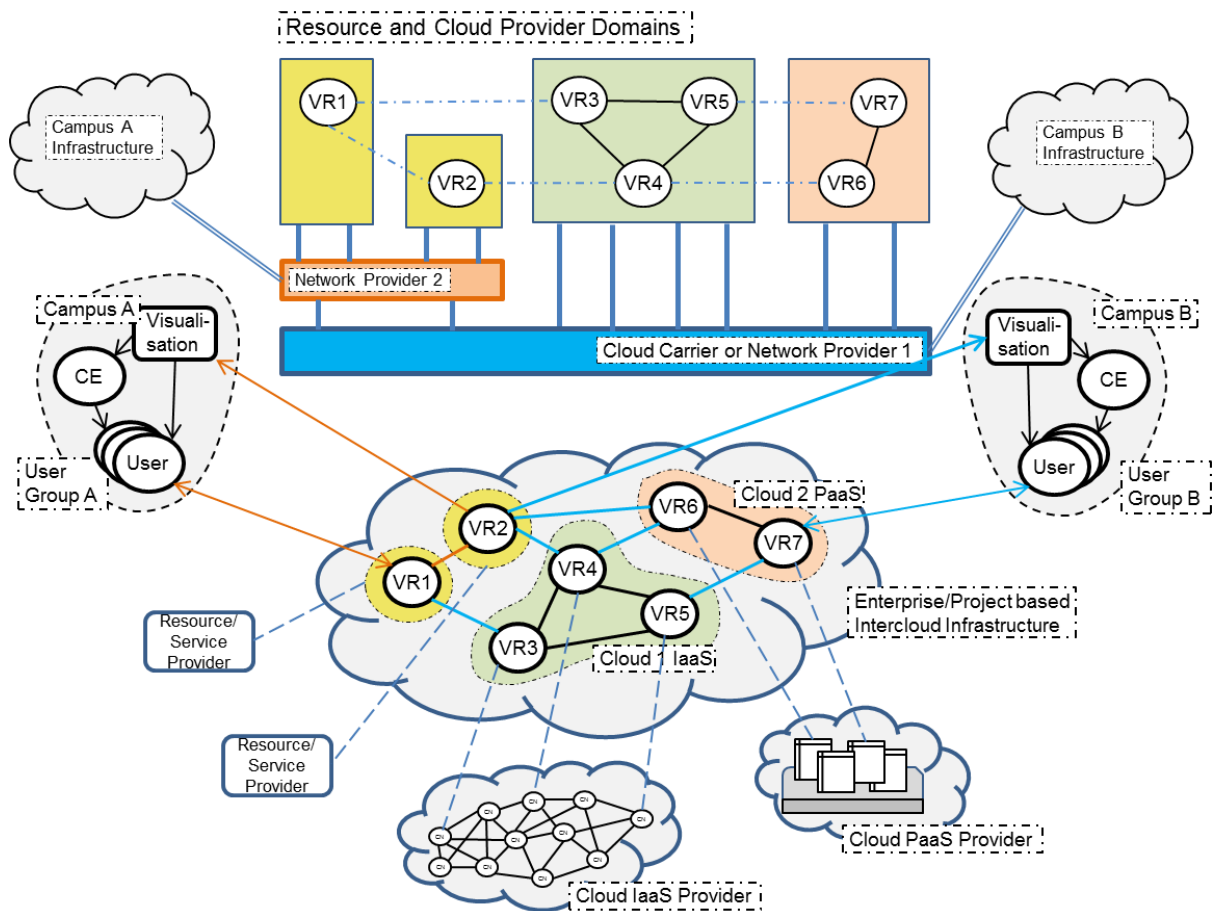


Figure 2.2. Required network interconnecting infrastructure that can be provided either single Cloud Carrier or together with the regular network provider.

The figures also illustrates a typical case when two different types of cloud services such as IaaS and PaaS based need to interoperate to allow consistent hybrid cloud infrastructure control and management.

4 ICAF Definition and Requirements

The proposed Intercloud Architecture should address the interoperability and integration issues in the current and emerging heterogeneous multi-domain and multi-provider clouds that could host modern and future critical enterprise and e-Science infrastructures and applications, including integration and interoperability with legacy campus/enterprise infrastructure.

The proposed ICAF should address the following goals, challenges and requirements:

- ICAF should support communication between cloud applications and services belonging to different service layers (vertical integration), between cloud domains and heterogeneous platforms (horizontal integration).
 - Be compatible and provide multi-layer integration of existing Cloud service models – IaaS, PaaS, SaaS and Apps clouds
- ICAF should provide a possibility that applications could control infrastructure and related supporting services at different service layers to achieve run-time optimization (Intercloud control and management functions).
 - Common Intercloud Control Plane and signalling for better cloud services and network integration

- ICAF should support cloud services/infrastructures provisioning on-demand and their lifecycle management, including composition, deployment, operation, and monitoring, involving resources and services from multiple providers.
- Provide a framework for heterogeneous inter-cloud federation
- Facilitate interoperable and measurable intra-provider infrastructures
- Explicit/Guaranteed intra- and inter-Cloud network infrastructure provisioning (as NaaS service model)
- Support existing Cloud Provider operational and business models and provide a basis for new forms of infrastructure services provisioning and operation

The proposed ICAF should use the reach experience of the Grid and Internet community and possibly following the same architecture patterns as Internet and Grid/OGSA, including provide functionalities for creating VO based infrastructures

Following the above requirements, we define the following complimentary components of the proposed Intercloud Architecture:

(1) Multilayer Cloud Services Model (CSM) for vertical cloud services interaction, integration and compatibility that defines both relations between cloud service models (such as IaaS, PaaS, SaaS) and other required functional layers and components of the general cloud based services infrastructure;

(2) Intercloud Control and Management Plane (ICCMP) for Intercloud applications/infrastructure control and management, including inter-applications signaling, synchronization and session management, configuration, monitoring, run time infrastructure optimization including VM migration, resources scaling, and jobs/objects routing;

(3) Intercloud Federation Framework (ICFF) to allow independent clouds and related infrastructure components federation of independently managed cloud based infrastructure components belonging to different cloud providers and/or administrative domains; this should support federation at the level of services, business applications, semantics, and namespaces, assuming necessary gateway or federation services;

(4) Intercloud Operation Framework (ICOF) which includes functionalities to support multi-provider infrastructure operation including business workflow, SLA management, accounting. ICOF defines the basic roles, actors and their relations in sense of resources operation, management and ownership. ICOF requires support from and interacts with both ICCMP and ICFF.

(5) Intercloud Security Framework (ICSF) that provides a basis for secure operation of all components of the Intercloud infrastructure. In this respect ICSF should provide a basis for integration of the security services between different CSM layers and all participating cloud service providers.

At this stage of research, we define only multi-layer Cloud Services Model that can be built using modern SOA technologies re-factored to support basic cloud service models as discussed below and in the following section. Future research on ICCMP will try to leverage the technologies of User Programmable Private Networks (UPVN) [19], and general Internet technologies such as provided by CDN [11] and Generalized Multi-Protocol Label Switching (GMPLS) [20].


The ICFF will extend current cloud federation concept [21] and leverage existing platforms for federated network access and federated identity management widely used for multi-domain and multi-provider infrastructure integration [22, 23].

The ICOF definition will include analysis of the TeleManagement Forum (TMF) documents related to eTOM and Operational Support Systems [24], Service Delivery Framework (SDF) [25]. ICOF will also evaluate an approach for market-oriented allocation of resources in clouds [26]. A market concept and environment allows participants to locate providers or consumers with the right offers, while the banking system ensures the financial transactions pertaining to agreements and are carried out between participants. The role of the broker performs the same function in such a market as in any other market, and can provide substantial benefits for customers if the market and broker can operate in an automated fashion.

5 Multi-Layer Cloud Services Model (CSM)

5.1 Moving from the proprietary cloud services model to the layered model

Figure 2.3, a illustrates current relation between basic cloud service models IaaS, PaaS, SaaS that expose in most cases standard based interface to user services or applications but actually use proprietary interface to the physical provider platform. However in case of multiple heterogeneous cloud services integration in one integrated infrastructure or application (as illustrated by Figure 2.1), cloud services from different service models and layers need to interact. This motivates definition of the layered cloud services model with interlayer interfaces that is depicted in Figure 2.3, b.

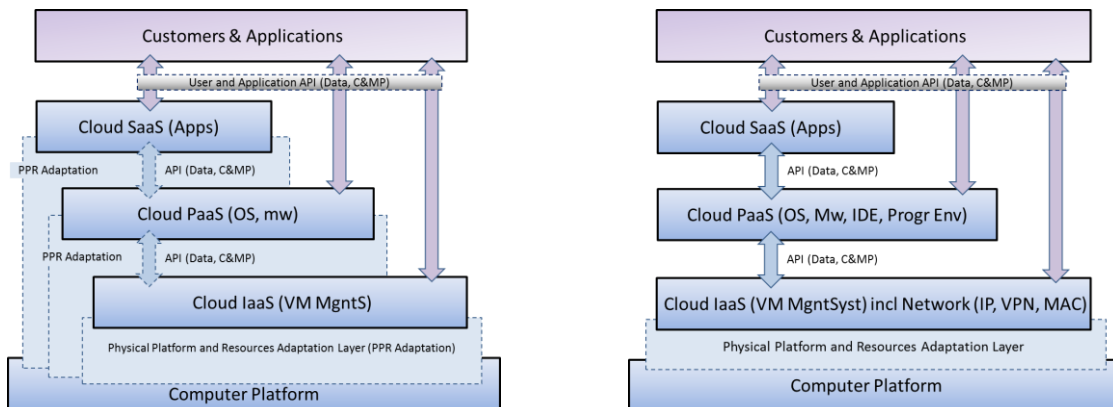

(a) Current relation between cloud service models (b) Intended layered cloud service models

Figure 2.3. Migration from proprietary internal cloud platform interfaces to inter-layer interfaces.

Figure 2.4 illustrates the CSM layers definition and related functional components in a typical cloud infrastructure. It shows that the basic cloud service models IaaS, PaaS, SaaS that expose in most cases standard based interfaces to user services or applications, but actually use proprietary interfaces to the physical provider platform. In this respect the proposed model can be used for the inter-layer interfaces definition.

In the proposed CSM the following layers are defined including user client or application at the top (numbering from bottom up, see Fig. 2.4):

(C6) User/customer side resources and services located in and provided by the customer's enterprise or campus network to support their integration with the cloud based infrastructure; these may include identity management, infrastructure administration, data services and visualization.

(C5) Access/Delivery infrastructure hosting components and functions to provide access to cloud services/resources and interconnect multiple cloud domains; cloud federation services are located at this layer.

(C4) Cloud services layer that may include different type of cloud services IaaS, PaaS, SaaS that are exposed to upper customer faced layer via standard interfaces while potentially using non-standard internal and lower facing interfaces.

(C3) Cloud virtual resources composition and orchestration layer that is represented by the Cloud Management Software (including such platforms as OpenNebula, OpenStack, or others) and may include additional services for combined inter-cloud infrastructure composition and orchestration.

(C2) Cloud virtualisation layer (e.g. represented by VMware, Xen or KVM as virtualisation platforms; or using custom virtualisation platform for non-computer resources).

(C1) Physical platform (PC hardware, storage, network, and network infrastructure); to interface with the virtualisation layer the physical resources layer may provide special adaptors' functionality.

Note. Layer acronyms use prefix "C" to denote their relation to clouds.

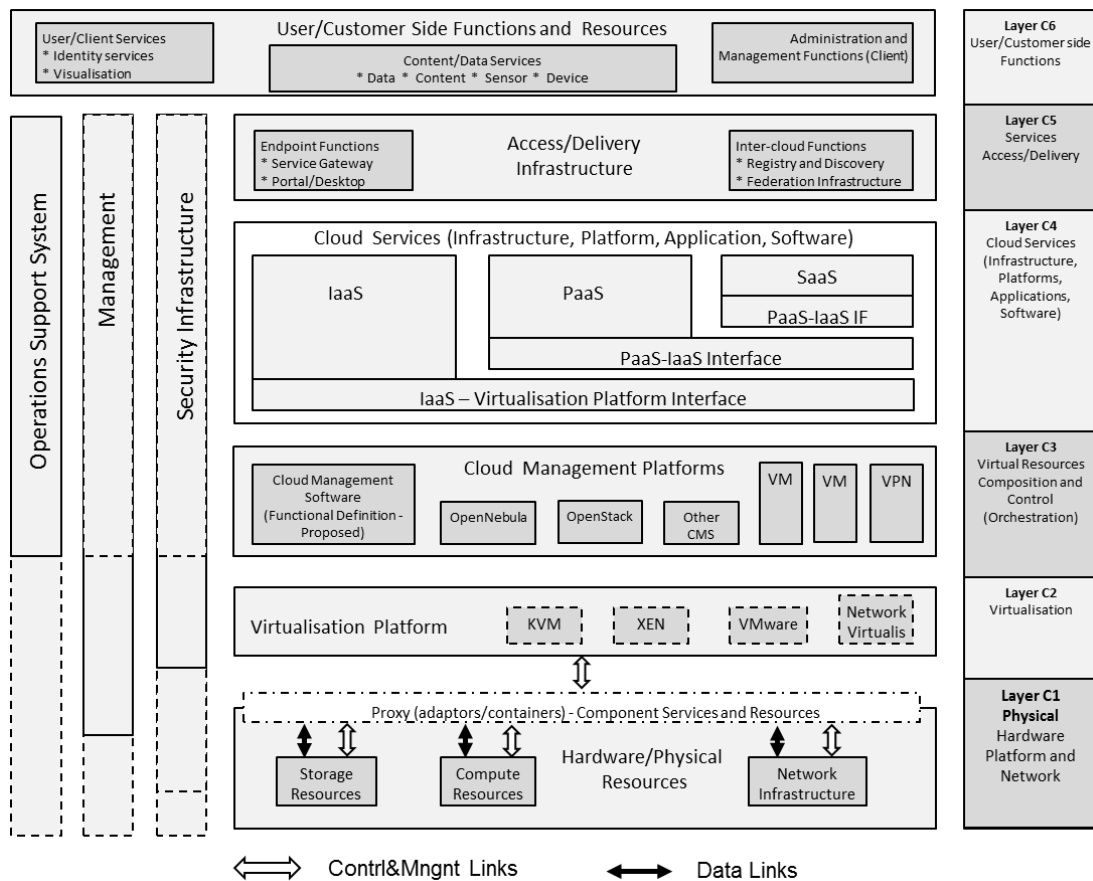


Figure 2.4. Reference Multilayer Cloud Services Model (CSM).

The three vertical planes or cross-layer infrastructures are defined to group related functionality in all CSM layers:

- Control and Management Plane which functionality is defined by Intercloud Control and Management Plane.
- Operations Support System represented by Intercloud Operations Framework.
- Security Infrastructure that is defined in as Intercloud Security Framework.

5.2 Definition of inter-layer interfaces

This section will provide suggestions about functional definition of inter-layer interfaces.

The section will investigate a possibility to re-use experiences from the GEYSERS architecture definition.

Figure 2.5 below illustrates a set of interfaces both that are currently defined for cloud services and their possible grouping to allow cross-layer communication in multilayer cloud services stack.

To be added.

6 Intercloud Control and Management Plane

This section will formulate requirements to Intercloud control and management protocols, functional components and interfaces. The main scenario should allow upper layer applications and processes to control underlying layers of the cloud infrastructure or platform. Figure 2.6 illustrate a scenario of IaaS and PaaS cloud domains communication that should use standard interfaces and proprietary interfaces.

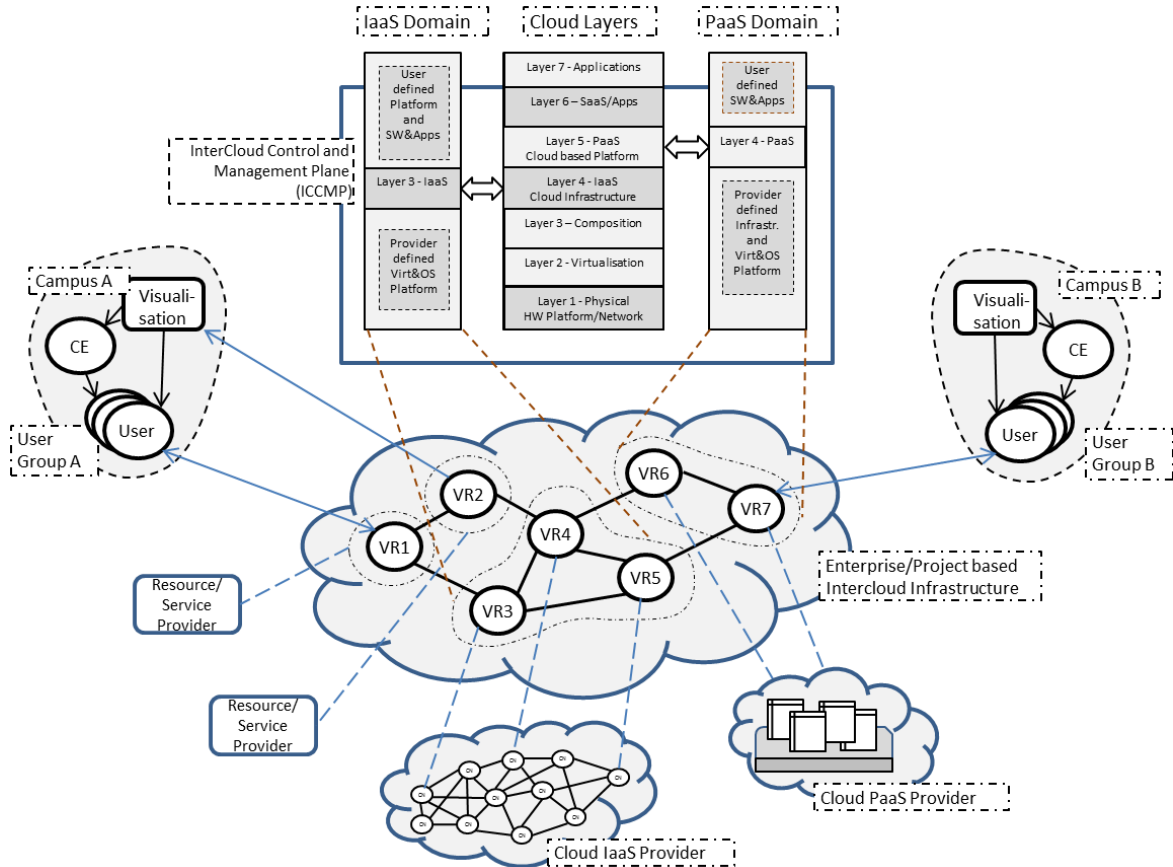


Figure 2.6. Intercloud Control and Management Plane providing single control and management domain to heterogeneous inter-cloud infrastructure.

Figure 2.7 illustrates a case when two different cloud/segments domain IaaS and PaaS need to interact allowing applications from one domain to control underlying virtualised resources and infrastructure in another domain. Upper layer interfaces are typically standardised and can use e.g. OCCI interface, while lower layer interfaces controlling internal provider virtualised and physical resources may be non-standard or proprietary. The role of ICCMP is to provide logical and functional interface between different cloud service layers running in different cloud domains. This provides another motivation for the standardisation of such interlayer interfaces; otherwise they can be implemented as part of user applications.

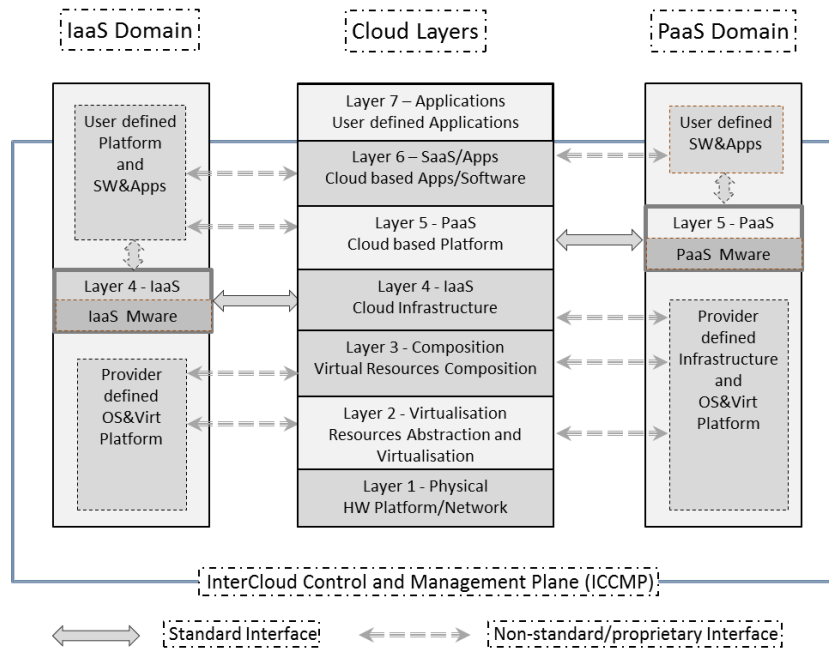


Figure 2.7. Example of the IaaS and PaaS cloud domains communication that uses standard interfaces and proprietary interfaces

ICCMP supports inter-cloud signalling, monitoring, dynamic configuration and synchronisation of the distributed heterogeneous clouds.

The main functional components include

- Cloud Resource Manager
- Network Infrastructure Manager
- Virtual Infrastructure composition and orchestration
- Services and infrastructure lifecycle management (that can be also a part of the composition and orchestration layer).

The ICCMP Interfaces should support the following functionalities:

- Inter-/cross-layer control and signalling
- Monitoring
- Location
- Topology aware infrastructure management
- Configuration and protocols management.

Based on the GEYSERS project implementation (see section VIII) we can suggest the GMPLS [19] as an appropriate technology for building ICCMP control plane that allows network infrastructure optimisation for the required compute and storage resources assigned to network nodes [20]. However, management functionalities will require development of new interfaces.

7 Intercloud Federation Framework (ICFF)

7.1 General Federated Cloud Infrastructure Model

Figure 2.8 illustrates the general concept of the cloud/Intercloud federation that allows integrating two or more independent cloud domains (e.g., related to different cloud providers) into one federated Intercloud infrastructure. Cloud federation model suggests existence of explicit or implicit Intercloud federation infrastructure that includes a number of functional components together with supporting protocols and interfaces:

- Service and Trust Brokers
- Service Registry and Discovery
- Federated Identity Provider (FedIDP) playing a role of the Federated Attribute Authority
- Policy Authority and optionally Trust Third Party (TTP)
- Intercloud gateway (GW) that provides translation of the requests, protocols and data formats between cloud domains.

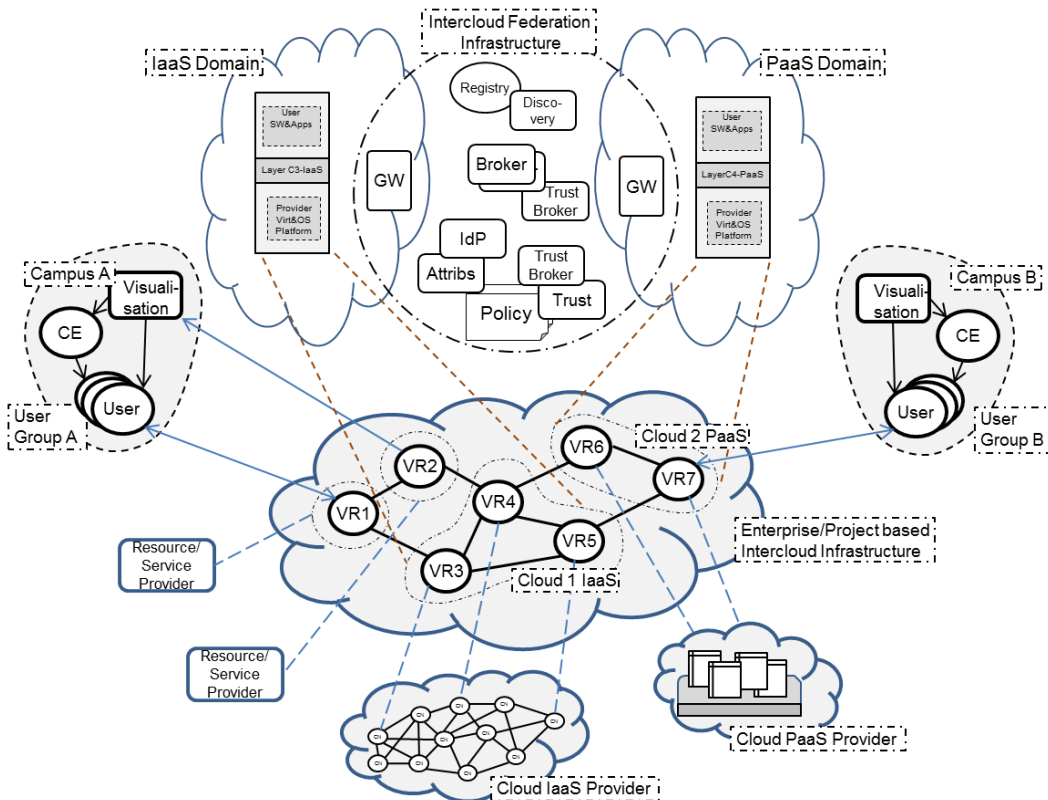


Figure 2.8. Main components of the Intercloud Federation Framework.

7.2 ICFF definition and components

The proposed ICFF allows clouds from different administrative domains to create a federation. The federation allows for end-users to access cloud services from multiple domains without need to obtain a separate identity, while services remain under control of their original operator or home provider.

The Intercloud Federation Framework is responsible for coordinating allocation of resources in a unified way. Figure 2.9 illustrates the main components of the federated Intercloud Architecture, specifically underlying the Intercloud gateway function (GW) that provides translation of the requests, protocols and

data formats between cloud domains. At the same time the federated Intercloud infrastructure requires a number of functionalities, protocols and interfaces to support its operation:

- Service and Trust Brokers
- Service Registry
- Service Discovery
- Identity provider (IDP), including attributes management
- Service and/or inter-domain gateway.

Correspondingly, the ICFF interfaces should support the following functionalities:

- Names and attributes resolution, translation and management (if/as needed)
- Publishing and subscription
- Discovery
- Trust/key management
- Service, infrastructure and federation itself lifecycle management.

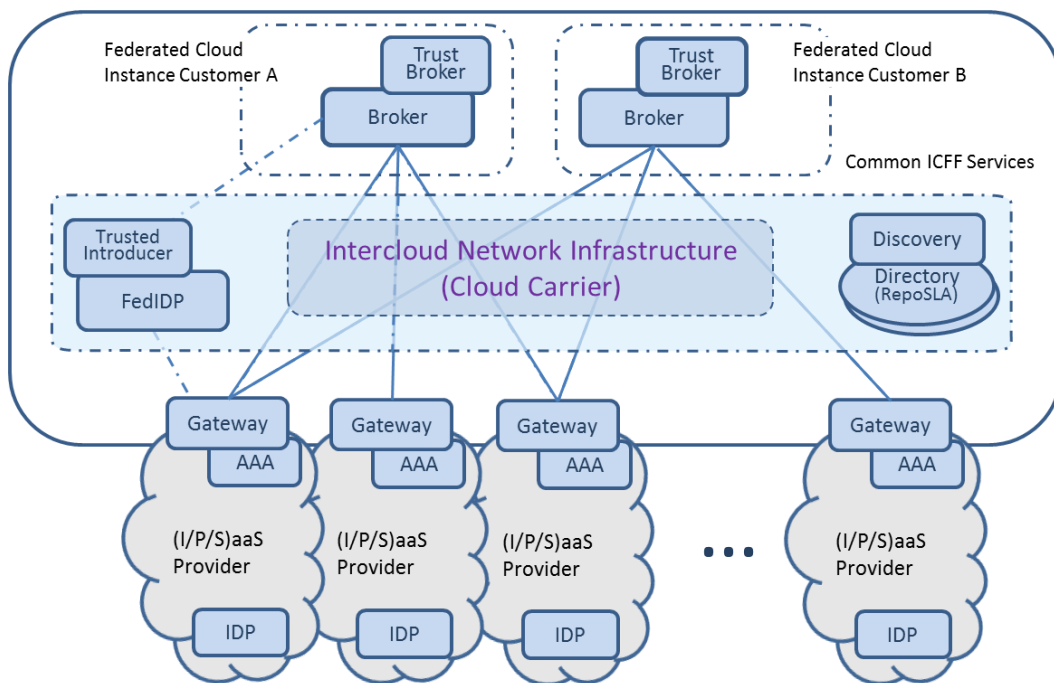


Figure 2.9. Intercloud federation infrastructure.

The following federation related issues must be addressed in the further ICFF definition:

- Federation, delegation and trust management
- Single Sign On (SSO) and session credentials management
- Attributes management in federations, attributes validation , mapping and translation
- Federation governance, including federation lifecycle management.

The ICFF can be built using existing platforms for federated network access and federated identity management widely used for multi-domain and multi-provider infrastructure integration [22, 23, 24].

7.2.1 Cloud Service Broker

To overcome these shortcomings of decentralized non-coordinated allocation of resources with in multi-provider multi-domain heterogeneous cloud services, we introduce a service broker to solve allocation of resources. We identify the broker as the key component for federation, which does not have to be exclusive.

The role and responsibility of the service broker is to solve the resource brokering problem defined as: "allocation of resources across the multiple cloud resources such as computational clusters, parallel supercomputers, storage clusters that belong to different administrative domains".

The service broker has interaction with both customers and providers to allocate and de-allocation resources across multiple cloud providers on behalf of the customers. Having a broker allocate resources on behalf will simplify administration for cloud providers, as cloud providers only have to do accounting for service brokers, instead for every customer. Service broker brings benefits of having a unified interface to all cloud providers in the federation what facilitates also interoperability between different participating clouds.

7.2.2 Service registry

The service registry is a directory where cloud providers can publish information about available services IaaS, SaaS and PaaS, that includes details about services, their interfaces and availability as well as Service Level Agreements and associated policies. The broker can query service registry information and negotiate SLA and policy with the clients, including allocation in a specific cloud provider.

7.2.3 Identity Provider

ICFF operates across security domains, which are involving different cloud entities, from cloud providers to cloud consumers [2]. In this context, ICFF needs to support and integrate with the identity and trust management for these entities for both provider and customer sides.

The dynamic resource provisioning in the collaboration scenarios of cloud providers require the trust management to carry out trust establishments between them. The trust management in the ICFF needs to support following requirements:

- Dynamic trust establishment between indirect cloud entities: Current relationships between cloud entities often rely on SLAs, which are mostly suitable for direct relationships. ICFF scenarios require a cloud provider or cloud consumer could connect to other unknown entities, through a chain of direct SLA relationships, which is known as dynamic trust relationship [38].
- Interoperate and extend standardized mechanisms on multi-domain identity management and trust management, which are SAML [39], OAuth2 [40], to support on-demand provisioned clouds.
- A fine-grained trust management policy language.

ICFF should take into account federated identity management in its operation management:

- Compatible with existing public identity management systems.
- Interoperate between identity management with the on-demand access control services to manage cloud resources.

7.3 Intercloud Federation Operational Patterns

7.3.1 Roles and Actors

We define the following main actors and roles adopting the Resource-Ownership-Role-Action (RORA) model proposed in [32]:

- Cloud Service Provider (CSP) as entity providing cloud based services to customers, on their request and based on the business agreement that is expressed as Service Level Agreement (SLA). We need to admit specifics of business relation in clouds due to the fact that majority of cloud services are self-services and they are governed under general or individualized SLA.
- Cloud Broker is an entity that may play a role of the third party in offering cloud service adding value of negotiating with many CSPs or customer groups and in some cases managing complex multi-provider services.

- Cloud Service Operator and/or Integrator is a new emerging role of the company that provides a value added service of integrating services from multiple cloud providers and delivering them to the customer.
- Customer (like enterprise or university)
- User is an end-user consuming cloud based services; in cloud services provisioning.

Other roles such as Cloud Carrier and Cloud Auditor are defined in the NIST standards [1].

Typically, federation membership is managed by IDP hosted by customer or user home organization. In case of the dynamic federation that can be initiated by the user, a new IDP will be created as a part of the provisioned cloud based infrastructure. The following are assumption about what basic services and mechanism the new dynamically created IDP will possess or inherit:

- Instantiated from the CSP IDP and by creation is federated with the other user IDP's where user is a member;
- The created dynamic trust federation will use the dynamic IDP as a trust proxy or a broker in case if user processes run across multiple CSP resources or services.

7.3.2 Customer side and Provider side Federations

We define the two general use cases for federating cloud resources on the provider side or creating federated multi-provider infrastructures and services to deliver federated cloud services to the customer.

Figure 2.10 illustrates two cases when (a) cloud based services and/or infrastructure needs to be integrated/federated with the existing user accounts and enterprise infrastructure, or (b) or cloud based public services can use external IdP and in this way already existing user accounts with the single or multiple 3rd party IDP (such as Google+/GooglePlay, Facebook, Microsoft, or other open IDP).

Figure 2.11 illustrates the major actors and their relation in the provider side federation to share and outsource cloud resources when providing a final service to the customer.

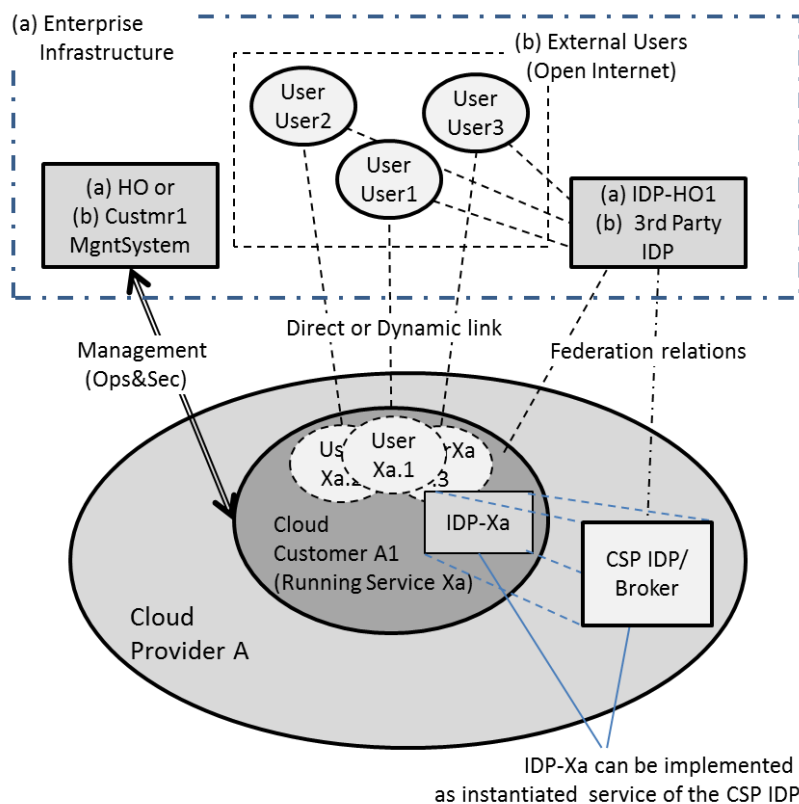


Figure 2.10. Customer/user side federation for delivery of the federated cloud services to enterprise customers.

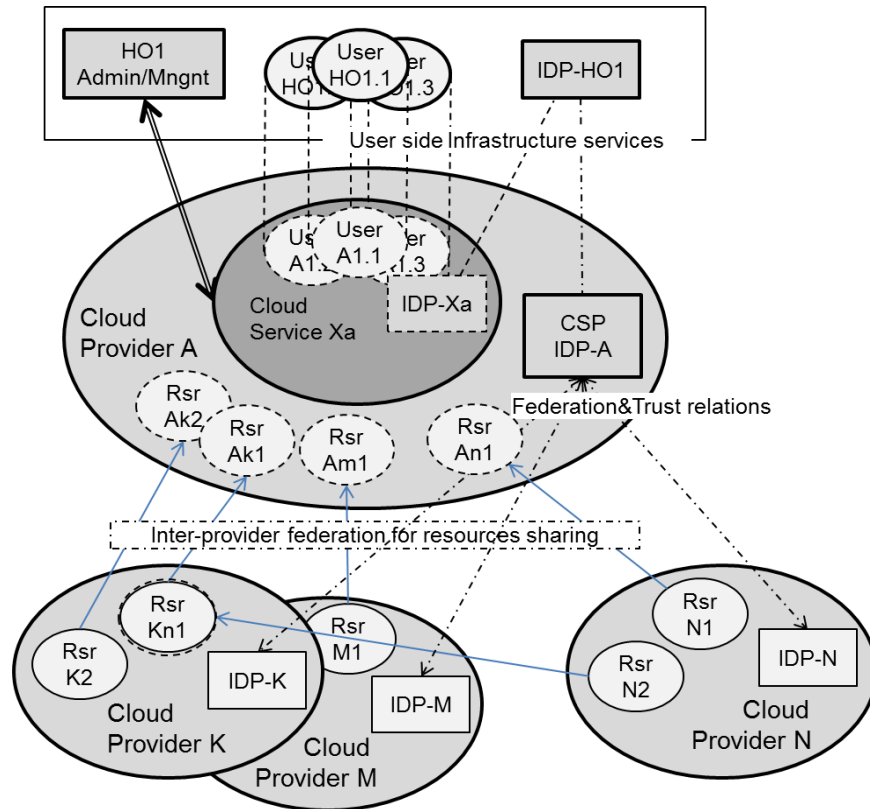


Figure 2.11. Provider side federation for resources sharing and outsourcing

8 Intercloud Operation Framework

This section will discuss possible Intercloud infrastructures operation scenarios and provide formal models for describing relations between main actors in such scenarios.

8.1 Intercloud Operations Framework Model

Figure 12 illustrates relation between the main components involved into services delivery and management. The main functional components include:

- Service Broker
- Service Registry
- Cloud Service Provider, Cloud Operator, Cloud (physical) Resource provider, Cloud Carrier
- Suggested ICOF interfaces should support the following functionalities:
- Service Provisioning, Deployment, Decommissioning (or Termination)
- SLA management and negotiation
- Services Lifecycle and metadata management

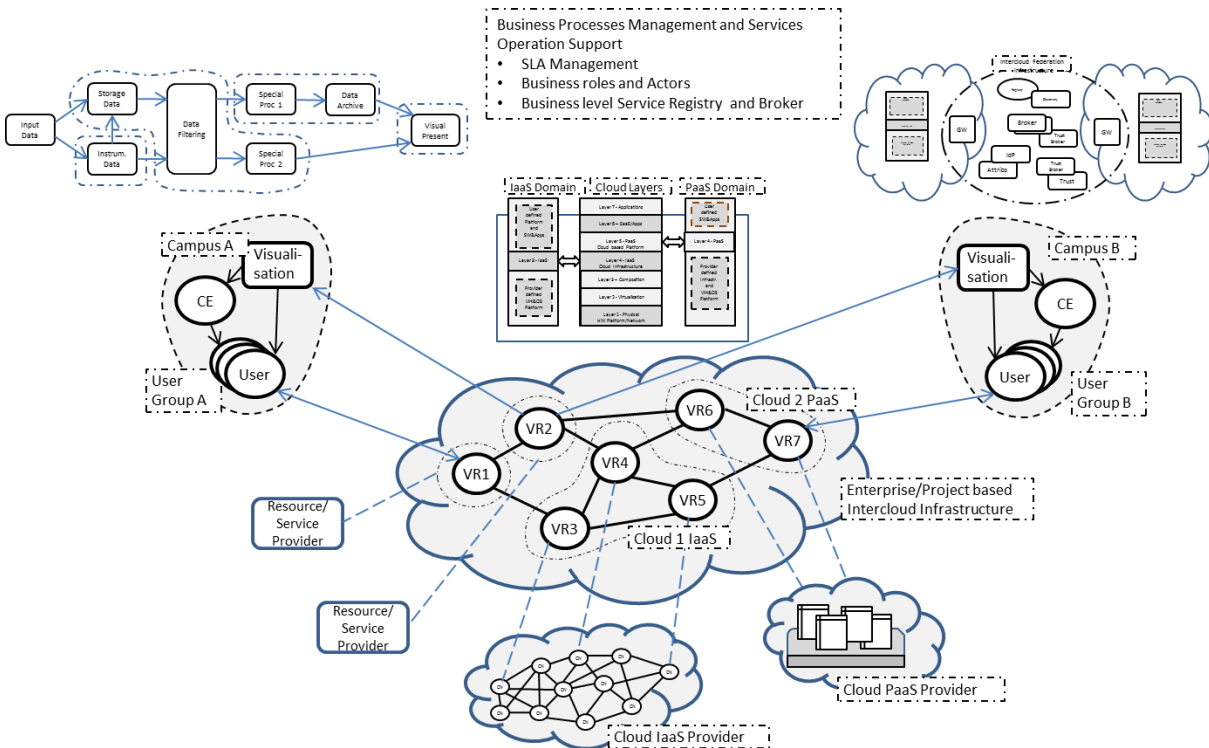


Figure 12. Intercloud Operation Framework providing a cloud services lifecycle and operation management

The ICOF definition will leverage the TeleManagement Forum (TMF) standards related to eTOM and Operational Support Systems [24], Service Delivery Framework (SDF) [25]. ICOF will also evaluate an approach for market-oriented allocation of resources in clouds [26].

8.2 RORA Model

ICOF defines the main roles and actors based on the RORA model: Resource, Ownership, Role, Action, - proposed in the GEYSERS project [20, 32]. This should provide a basis for business processes definition,

SLA management and access control policy definition as well as broker and federation operation.

To be added by external contributors.

9 Abstract Model for Cloud based Infrastructure Services Provisioning

9.1 General model

Figure 14 below illustrates the abstraction of the typical project or group oriented Virtual Infrastructure (VI) provisioning process that includes both computing resources and supporting network that commonly referred as infrastructure services. The figure also shows the main actors involved into this process, such as Physical Infrastructure Provider (PIP), Virtual Infrastructure Provider (VIP), Virtual Infrastructure Operator (VIO).

The required supporting infrastructure services are depicted on the left side of the picture and includes functional components and services used to support normal operation of all mentioned actors. The Virtual Infrastructure Composition and Management (VICM) layer includes the Logical Abstraction Layer and the VI/VR Adaptation Layer facing correspondingly lower PIP and upper Application layer. VICM related functionality is described below and actually implements the proposed by authors Composable Services Architecture (CSA) [3, 18].

The proposed architecture is a SOA (Service Oriented Architecture) based and uses the same basic operation principle as known and widely used SOA frameworks, what also provides a direct mapping to the possible VICM implementation platforms such as Enterprise Services Bus (ESB) [27] or OSGi framework [28].

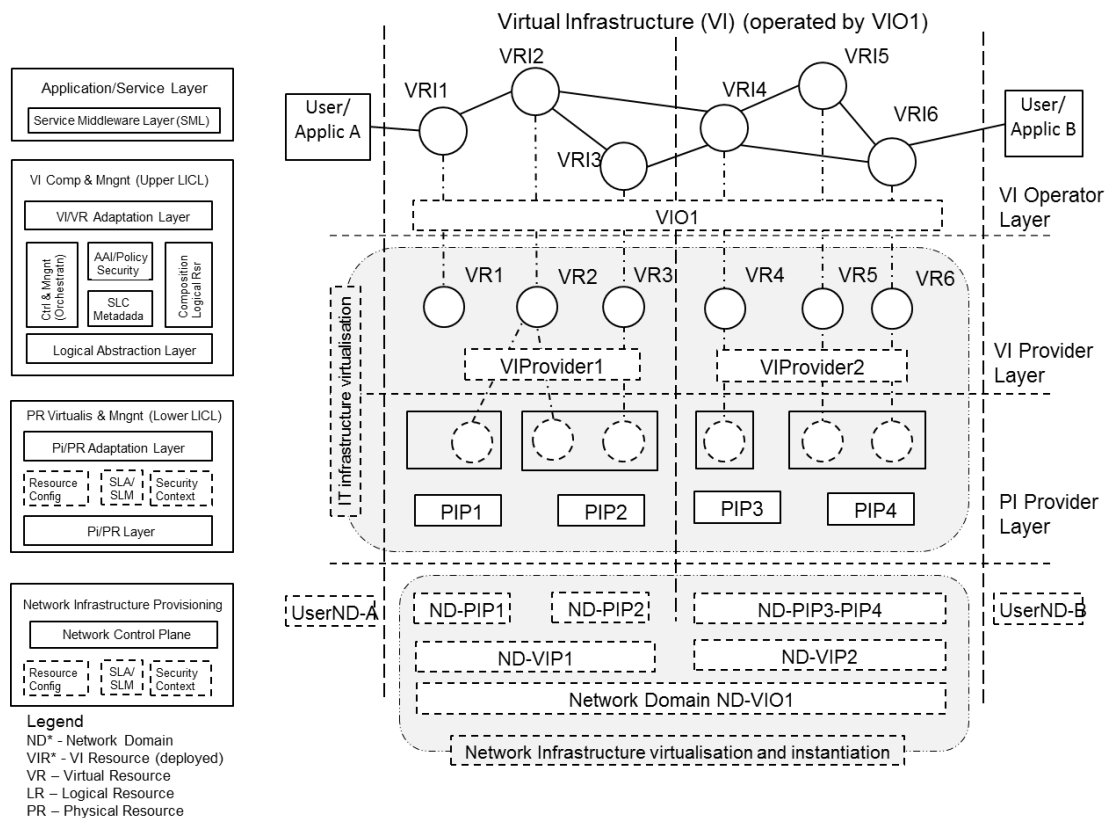


Figure 14. Main actors, functional layers and processes in on-demand infrastructure services provisioning

The infrastructure provisioning process, also referred to as Service Delivery Framework (SDF), is adopted from the TeleManagement Forum SDF [25] with necessary extensions to allow dynamic services provisioning. It includes the following main stages: (1) infrastructure creation request sent to VIO or VIP

that may include both required resources and network infrastructure to support distributed target user groups and/or consuming applications; (2) infrastructure planning and advance reservation; (3) infrastructure deployment including services synchronization and initiation; (4) operation stage, and (5) infrastructure decommissioning. The SDF combines in one provisioning workflow all processes that are run by different supporting systems and executed by different actors.

Physical Resources (PR), including IT resources and network, are provided by Physical Infrastructure Providers (PIP). In order to be included into VI composition and provisioning by the VIP they need to be abstracted to Logical Resource (LR) that will undergo a number of abstract transformations including possibly interactive negotiation with the PIP. The composed VI need to be deployed to the PIP which will create virtualised physical resources (VPR) that may be a part, a pool, or a combination of the resources provided by PIP.

The infrastructure services virtualisation and composition is defined by the Infrastructure Services Modeling Framework (ISMF) described in the previous authors' work [18].

The deployment process includes distribution of common VI context, configuration of VPR at PIP, advance reservation and scheduling, and virtualised infrastructure services synchronization and initiation, to make them available to Application layer consumers.

The proposed abstract model provides a basis for CSM Virtualisation and Composition layers definition and allows outsourcing the provisioned VI operation to the VI Operator (VIO) who is from the user/consumer point of view provides valuable services of the required resources consolidation - both IT and networks, and takes a burden of managing the provisioned services.

9.2 Virtual Infrastructure Composition and Management Layer

The IaaS infrastructure services provisioning is the dynamic creation of an infrastructure consisting of different types of resources together with necessary (infrastructure wide) control and management planes, all provisioned on-demand. The proposed VICM is defined according to CSA and provides a framework for the design and operation of the composite/complex services provisioned on-demand. It is based on the component services virtualisation, which in its own turn is based on the logical abstraction of the (physical) component services and their dynamic composition.

Figure 15 shows the major functional components of the proposed VICM and their interactions. The central part of the architecture is the VICM middleware, which should ensure smooth service operation during all stages of the composable services lifecycle.

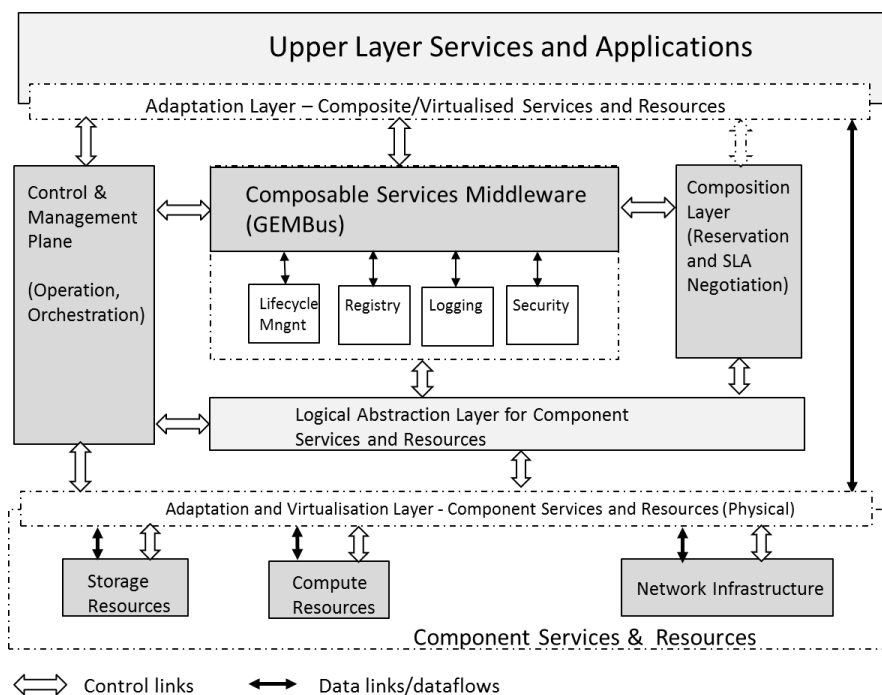


Figure 15. Virtual Infrastructure Composition and Management (Orchestration) layer.

The VICM (VICM-MW) provides a common interaction environment for both (physical) component services and complex/composite services built with them. Besides exchanging messages, VICM-MW also contains/provides a set of basic/general infrastructure services required to support reliable and secure (composite) services delivery and operation:

- Service Lifecycle Management that stores the services metadata, including the lifecycle stage, the service state, and the provisioning session context.
- Registry service that contains information about all component services and dynamically created composite services. The Registry should support automatic services registration.
- Logging service that can be also combined with the monitoring service.
- Middleware Security services that ensure secure operation of the VICM/middleware.

Note, both logging and security services can also be provided as component services that are composed of other services in a regular way.

The VICM (and CSA) defines also Logical Abstraction Layer for component services and resources that is necessary part of creating services pool and virtualisation. Another functional layer is the Services Composition layer that allows presentation of the composed/composite services as regular services to the consumer.

The Control and Management plane provides necessary functionality for managing composed services during their normal operation. It may include Orchestration service to coordinate component service operation. In a simple case it may be standard workflow management system.

The VICM defines a special adaptation layer to support dynamically provisioned Control and Management plane interactions with the component services. These must implement adaptation layer interfaces that are capable of supporting the major VICM provisioning stages, in particular, service identification, services configuration and metadata including security context, and provisioning session management.

Security services are applied at multiple layers to ensure consistent security. Management functions are also present at all layers and can be seen as the management plane.

9.3 Infrastructure Services Modeling Framework

The Infrastructure Services Modeling Framework (ISMF) provides a basis for virtualization and management of infrastructure resources, including description, discovery, modeling, composition, and monitoring. In this paper we mainly focus on the description of resources and the lifecycle of these resources. The described model in this section is being developed in the GEYSERS project [5].

9.3.1 Resource Modeling

The two main descriptive elements of the ISMF are the infrastructure topology and descriptions of resources in that topology. Besides these main ingredients, the ISMF also allows for describing QoS attributes of resources, energy related attributes, and attributes needed for access control.

The main requirements for the ISMF are, that it should allow for describing Physical Resources (PR) as well as Virtual Resources (VR). Describing physical aspects of a resource means that a great level of detail in the description is required while describing a virtual resource may require a more abstract view. Furthermore, the ISMF should allow for manipulation of resource descriptions such as partitioning and aggregation. Resources on which manipulation takes place, and resources that are the outcome of manipulation are called Logical Resources (LR).

The ISMF is based on semantic web technology. This means that the description format will be based on the Web Ontology Language (OWL) [22]. This approach ensures the ISMF is extensible and allows for easy abstraction of resources by adding or omitting resource description elements. Furthermore, this approach has enabled us to re-use the Network Description Language [23] to describe infrastructure topologies.

9.3.2 Virtual Resource Lifecycle

Figure 16 illustrates relations between different resource presentations along the provisioning process that can also be defined as the Virtual Resource lifecycle.

The Physical Resource information is published by a PIP to the Registry service serving VICM and VIP. This published information describes a PR. The published LR information presented in the commonly adopted form (using common data or semantic model) is then used by VICM/VIP composition service to create the requested infrastructure using a combination of (instantiated) Virtual Resources and interconnecting them with a network infrastructure. In its own turn the network can be composed of a few network segments run by different network providers.

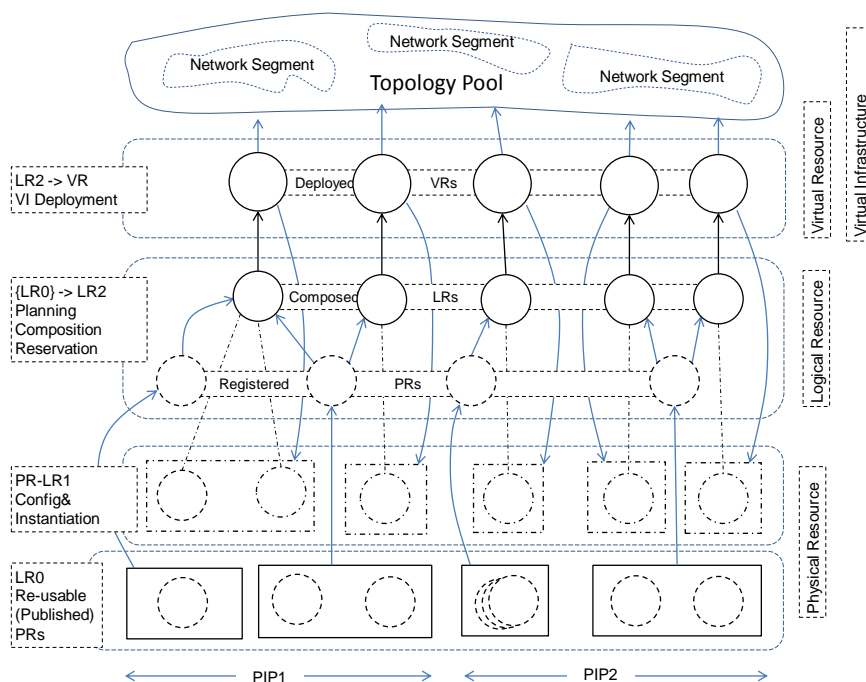


Figure 16. Relation between different resource presentations in relation to different provisioning stages.

It is important to mention that physical and virtual resources discussed here are in fact complex software enabled systems with their own operating systems and security services. The VI provisioning process should support the smooth integration into the common federated VI security infrastructure by allowing the definition of a common access control policy. Access decisions made at the VI level should be trusted and validated at the PIP level. This can be achieved by creating dynamic security associations during the provisioning process.

10 Security Infrastructure for Federated Intercloud Infrastructure Services

This section will discuss numerous aspects related to building consistent security infrastructure for on-demand provisioned Intercloud infrastructure services and Intercloud applications

Operational security, certification/attestation and assurance issues will be also discussed.

However it is intended that the detailed security architecture and design will be published in another document.

11 Implementation Status and Suggestions

The presented Intercloud Architecture actually answers a number of identified issues in currently ongoing research and development projects such as GEYSERS [5] and GEANT3 Composable Services [4] that correspondingly develop Logical Infrastructure Composition Layer (LICL) and GEMBus (GEANT Multidomain Bus) as an implementation of the Composable Services Architecture [3].

GEYSERS architecture and LICL is currently being extended to provide a basis for cloud IaaS infrastructure services provisioning platform with the manageable network infrastructure services. A number of interfaces defined in GEYSERS [29] can be re-factored to more general CSM and ICCMP inter- and cross-layer interfaces. As a part of its security architecture the project also defined the Common Security Services Interface (CSSI) and security infrastructure for dynamically provisioned virtualised security services [30].

12 Summary and Future Development

This document presents the ongoing research on developing architecture and framework for dynamically provisioned and reconfigurable infrastructure services to support modern e-Science and high-technology industry applications that require both high-performance computing resources (provisioned as Grids or Clouds) and high-speed dedicated transport network.

The paper presents on-going research at the University of Amsterdam to develop the Intercloud Architecture (ICA) that should address problems with multi-domain heterogeneous cloud based applications integration and inter-provider and inter-platform interoperability.

Further research will be focused on definition of Intercloud Control and Management Plane (ICCMP) and Intercloud Federation Framework (ICFF) what will require analysis and evaluation both existing protocols and interfaces and those that are developed in GEYSERS and other cooperating projects such as CONTRAIL (<http://contrail-project.eu/>), SAIL (<http://www.sail-project.eu/>), and Mantychore (<http://www.mantychore.eu/>).

The presented research is planned to be contributed to a number of standardisation bodies where the authors are involved and play active role, in particular, the Open Grid Forum Research Group on Infrastructure Services On-Demand provisioning (ISOD-RG) [34, 35], IETF on Cloud Architecture Framework definition [36], TeleManagement Forum on Cloud and Intercloud management aspects [37].

The proposed CSA has been implemented in the framework of the GEANT3 Project as an architectural component of the GEANT Multidomain service bus (GEMBus). The GEMBus extends the industry adopted Enterprise Service Bus (ESB) technology with the additional functionality to support multi-domain services provisioning. The GEMBus infrastructure intended to allow dynamic composition of the infrastructure services to support collaboration of the distributed groups of researchers.

The proposed Cloud Services Model (CSM) and Intercloud Federation Framework provides a basis for the new development in the GN3plus Project the Open Cloud eXchange (OCX) that intends to simplify the interconnection between the Cloud Service Provider and the customer infrastructure and support the dynamic federations establishment between multiple cloud providers and a customer.

The future developments will include further development of all defined components and further definition of the security architecture and related security services and mechanisms to support creation of the dynamic security and trust associations.

Special attentions will be also given to the definition of the Infrastructure Services Modelling Framework, in particular, integrating related developments on defining common network and IT resources description framework.

13 References

- [1] NIST SP 800-145, "A NIST definition of cloud computing", [online] Available: <http://csrc.nist.gov/publications/nistpubs/800-145/SP800-145.pdf>
- [2] NIST SP 500-292, Cloud Computing Reference Architecture, v1.0. [Online] http://collaborate.nist.gov/twiki-cloud-computing/pub/CloudComputing/ReferenceArchitectureTaxonomy/NIST_SP_500-292_-_090611.pdf
- [3] Generic Architecture for Cloud Infrastructure as a Service (IaaS) Provisioning Model, Release 1. SNE Techn. Report SNE-UVA-2011-03, 15 April 2011. [Online] <http://staff.science.uva.nl/~demch/worksinprogress/sne2011-techreport-2011-03-clouds-iaas-architecture-release1.pdf>
- [4] GEANT Project. [Online] <http://www.geant.net/pages/home.aspx>
- [5] Generalised Architecture for Dynamic Infrastructure Services (GEYSERS Project). [Online] <http://www.geysers.eu/>
- [6] Demchenko, Y., R.Strijkers, C.Ngo, M.Cristea, M.Ghijsen, C. de Laat, Defining Intercloud Architecture. Poster paper. Proc. 3rd IEEE Conf. on Cloud Computing Technologies and Science (CloudCom2011), 29 November - 1 December 2011, Athens, Greece. ISBN: 978-960-93-3482-2
- [7] Open Virtualization Format (OVF), DMTF. [online] <http://www.dmtf.org/standards/ovf>
- [8] Cloud Data Management Interface, SNIA. [online] <http://www.snia.org/cdmi>
- [9] GFD.183 Open Cloud Computing Interface - Core [online] <http://www.ogf.org/documents/GFD.183.pdf>
- [10] DRAFT NIST SP 800-146, Cloud Computing Synopsis and Recommendations. [online] Available: <http://csrc.nist.gov/publications/drafts/800-146/Draft-NIST-SP800-146.pdf>
- [11] IEEE P2302 - Standard for Intercloud Interoperability and Federation (SIIF). [online] <http://standards.ieee.org/develop/project/2302.html>
- [12] Leung, K. and Lee, Y. (2011). Content Distribution Network Interconnection (CDNI) Requirements. IETF draft, work in progress, draft-ietf-cdni-requirement-00.
- [13] RFC3920 Extensible Messaging and Presence Protocol (XMPP): Core. [online] <http://www.ietf.org/rfc/rfc3920.txt>
- [14] Bernstein, D., Ludvigson, E., Sankar, K., Diamond, S., Morrow, M., Blueprint for the Intercloud - Protocols and Formats for Cloud Computing Interoperability. In Internet and Web Applications and Services, 2009. ICIW '09. Fourth International Conference on, 24-28 May 2009, Venice, Italy.
- [15] ITU-T Focus Group on Cloud Computing. <http://www.itu.int/en/ITU-T/focusgroups/cloud/Pages/default.aspx>
- [16] FG Cloud Technical Report (Part 1 to 7). [online] <http://www.itu.int/en/ITU-T/focusgroups/cloud/Documents/FG-coud-technical-report.zip>
- [17] NIST SP500-291 NIST Cloud Computing Standards Roadmap. [online] Available: http://collaborate.nist.gov/twiki-cloud-computing/pub/CloudComputing/StandardsRoadmap/NIST_SP_500-291_Jul5A.pdf
- [18] NIST SP 800-146, Cloud Computing Synopsis and Recommendations. [online] Available: <http://csrc.nist.gov/publications/nistpubs/800-144/SP800-144.pdf>
- [19] Demchenko, Y., J. van der Ham, M. Ghijsen, M. Cristea, V. Yakovenko, C. de Laat, "On-Demand Provisioning of Cloud and Grid based Infrastructure Services for Collaborative Projects and Groups",

The 2011 International Conference on Collaboration Technologies and Systems (CTS 2011), May 23-27, 2011, Philadelphia, Pennsylvania, USA

- [20] Meijer, R. J., Strijkers, R. J., Gommans, L., & de Laat, C. (2006). User Programmable Virtualized Networks. In e-Science and Grid Computing, 2006. e-Science '06. Second IEEE International Conference on (p. 43).
- [21] RFC 3945. Generalized Multi-Protocol Label Switching (GMPLS) Architecture. [online] <http://www.ietf.org/rfc/rfc3945.txt>
- [22] Defining Federated Cloud Ecosystems. Blog post by Krishnan Subramanian on October 6, 2011. [online] <http://www.cloudave.com/15323/defining-federated-cloud-ecosystems/>
- [23] Federated Network Architectures. GEANT3 Project. [online] http://www.geant.net/Research/Future_Network_Research/Pages/FederatedNetworkArchitectures.aspx
- [24] OASIS IDCloud TC, "OASIS Identity in the Cloud TC." [Online]. Available: <http://wiki.oasis-open.org/id-cloud/>.
- [25] TM Forum Framework. <http://www.tmforum.org/framework/1911/home.html>
- [26] TR139, Service Delivery Framework (SDF) Overview, Release 2.0. <http://www.tmforum.org/TechnicalReports/TR139ServiceDelivery/34303/article.html>
- [27] R. Buyya, C.S. Yeo, S. Venugopal: Market-oriented cloud computing: Vision, hype, and reality for delivering it services as computing utilities. HPCC 2008: 5-13
- [28] D. Chappell, ENTERPRISE SERVICE BUS, O'Reilly, June 2004.
- [29] OSGi Service Platform Release 4, Version 4.2. [online] Available: <http://www.osgi.org/Download/Release4V42>
- [30] GEYSERS Project Deliverable 2.2 (update): GEYSERS overall architecture & interfaces specification and service provisioning workflow. [online] http://wiki.geysers.eu/images/5/55/Geysers-deliverable_2.2_update_final.pdf
- [31] Ngo, C., P.Membrey, Y.Demchenko, C. de Laat, Security Framework for Virtualised Infrastructure Services Provisioned On-demand. Proc. 3rd IEEE Conf. on Cloud Computing Technologies and Science (CloudCom2011), 29 November - 1 December 2011, Athens, Greece. ISBN: 978-0-7695-4622-3
- [32] García-Espín, J. A., J. Ferrer Riera, S. Figuerola and Ester LópezA Multi-tenancy Model Based on Resource Capabilities and Ownership for Infrastructure Management. Proc. The 4th IEEE Conf. on Cloud Computing Technologies and Science (CloudCom2012), 3 - 6 December 2012, Taipei, Taiwan. IEEE Catalog Number: CFP12CLU-USB. ISBN: 978-1-4673-4509-5
- [33] Application Bridging for Federated Access Beyond Web (ABFAB) Architecture, Internet-Draft, 10 January 2013. [online] <http://tools.ietf.org/id/draft-ietf-abfab-arch-03.txt>
- [34] Open Grid Forum Research Group on Infrastructure Services On-Demand provisioning (ISOD-RG). [Online]. http://www.gridforum.org/gf/group_info/view.php?group=ISOD-RG
- [35] On-Demand Infrastructure Services Provisioning Best Practices, Version 1.3, 15 February 2013 (OGF ISOD-RG Deliverable). <https://forge.ogf.org/sf/docman/do/downloadDocument/projects.isod-rg/docman.root.drafts/doc16538>
- [36] Cloud Reference Framework. Internet-Draft, version 0.4, December 27, 2012. [online] <http://www.ietf.org/id/draft-ghisler-cloud-reference-framework-04.txt>

- [37] TeleManagement Forum Cloud Management
http://www.tmforum.org/community/groups/cloud_computing_services/wiki/cloud-management.aspx
- [38] Ngo, C., Y.Demchenko, C. de Laat, Toward a Dynamic Trust Establishment Approach for Multi-provider Intercloud Environment The 4th IEEE Conf. on Cloud Computing Technologies and Science (CloudCom2012), 3 - 6 December 2012, Taipei, Taiwan
- [39] (SAML2) Assertions and protocols for the OASIS security assertion markup language (SAML) v2.0, OASIS standard, OASIS, SAML, Mar. 2005. [Online]. Available: <http://docs.oasis-open.org/security/saml/v2.0/saml-core-2.0-os.pdf>
- [40] (OAuth2) Kaila, P., OAuth and OpenID 2.0, From End-to-End to Trust-to-Trust, 2008. [online] <https://www.zotero.org/jod999/items/itemKey/S449GVRK>
- [41]

Additional References

- [42] ITU-T Recommendation Y.2011 (2004) - General principles and general reference model for Next Generation Networks.
- [43] ITU-T Recommendation Y.2234 (09/2008) - Open service environment capabilities for NGN
- [44] Securing the Cloud: Designing Security for a New Age, Dec. 10, 2009. [Online] Available at http://i.zdnet.com/whitepapers/eflorida_Securing_Cloud_Designing_Security_New_Age.pdf
- [45] Cloud Computing: Benefits, risks and recommendations for information security, Editors Daniele Catteddu, Giles Hogben, November 2009. [Online] Available at <http://www.enisa.europa.eu/act/rm/files/deliverables/cloud-computing-risk-assessment>
- [46] Amazon Web Services: Overview of Security Processes. November 2009. <http://aws.amazon.com/security>
- [47] Security Guidance for Critical Areas of Focus in Cloud Computing V2.1. Cloud Security Alliance, December 2009. [Online] Available at <http://www.cloudsecurityalliance.org/csaguide.pdf>
- [48]

Appendix A ITU-T FG Cloud Technical Report Overview

This section will provide overview analysis of the FG Cloud Technical Report consisting of 7 parts:

Part 1: Introduction to the cloud ecosystem: definitions, taxonomies, use cases and high level requirements

Part 2: Functional Requirements and Reference Architecture

Part 3: Requirements and framework architecture of Cloud Infrastructure

Part 4: Cloud Resource Management Gap Analysis

Part 5: Cloud security

Part 6: Overview of SDOs involved in Cloud Computing

Part 7: Benefits from telecommunication perspectives